

Scan for Latest
Price & Product
Updates



Innovative Access & Egress Solutions *for Building Security and Life Safety*



Price List 17

EFFECTIVE OCTOBER 1, 2012

ELECTRIC & MECHANICAL
ACCESS CONTROL HARDWARE



1	Warranty & Sales Policy
1.4	Warranty
1.4	Basic Component Considerations
1.5	Sales Policy
1.5	System Engineering
2	Mechanical Door Hardware
2.6	M7200 Mechanical Cylindrical Lockset
2.7	M7800 Mortise Lockset
2.8	SPECTRA S6000 Series Mechanical Exit Devices
2.9	Mechanical Trim
2.10	Exit Device Strikes
3	Stand Alone Access Controls
3.11	918, 920 Keypads
3.14	930 Vandal Res. & Weatherized Keypads, 931 Keypad
3.14	E4KP Prox Card & Keypad Reader
3.14	E72 Civic Digital Cylindrical Lockset
4	Card & Keypad Systems
4.15	E5 Network Access Systems
5	Electrified Cylindrical Locksets
5.16	7200 Electra™ Cylindrical Locksets
6	Electrified Mortise Locksets
6.18	7800 SELECTRIC® Mortise Lockset
6.22	Field Electrification Kit for Schlage L9080
6.20	7500 HiTower® Actuator Controlled Lockset
6.23	7000-DGK Door Core Drill Guide Kit
7	Electric Latch Retraction Kit
7.24	LR100K Field Retrofit ELR
8	Exit Devices
8.28	S6000 Spectra™ Exit Device
8.30	Electric Latch Retraction
8.32	Electric Mortise Exit Device
8.32	Electric Dogging Device
8.33	Alarm Exit Device
8.33	Delayed Egress Exit Device
8.29	S6000 Spectra™ Trim
8.35	HiTower Pro® Electrified Mortise Exit Device

9	Electric Strikes
9.36	15, 25 Strike
9.36	No-Cut Electric Strike
9.37	UniFLEX™ 45 Series Universal Strike
9.38	UniFLEX™ 55 Series Electric Strike
9.39	30 Rim Mount Electric Strike
10	Electric Bolt Locks
10.40	1091A, 1291A, 1190A, 2090A, PB2090A Narrow Mortise Bolt Locks
10.40	110, 210, 160, 260 Conventional Bolt Locks
10.41	180, 280 Surface Bolt Locks
11	Cabinet, Gate & Specialty Locks
11.42	295 Programmable Cabinet Lock, 290 Cabinet Lock
11.42	1583 Micro EMLock®
11.42	E300 Excel™ Value Series
11.43	PBD2090A PanicLok Exit Device Release
11.43	GL160A, GL260A Gate Locks
11.43	1591 Mortise EMLock®
11.44	1575/1576 Gate EMLock®
12	Magnetic Locks
12.45	350 Narrow Line EMLock®
12.46	E6200, E1200, E600 Excel™ Value Series
12.47	1510, 1570, 1580 EMLock Pro Series
12.49	Magnetic Lock Mounting Kits, Architectural Housings
12.50	Magnetic Lock Header Mounting Bracket
12.50	Magnetic Lock Universal & Concrete Mounting Brackets
12.50	Magnetic Lock AR Armature Mounting Bracket
12.51	Magnetic Lock Filler Plates, Angle Brackets
13	Magnetic Shear Locks
13.52	1561, 1562, 1565, 1566 Hi/Shear Concealed
13.53	1561S, 1561TJ, 1562SC Hi/Shear Surface
14	Delayed Egress Locks & Controllers
14.54	1511S/T Exit Check, Integrated
14.56	1581S Mini Exit Check, Integrated
14.57	101-DE Exit Check, Wall Mount Controller
14.58	Delayed Egress, Annunciators & Controls
15	Magnetic Door Holders
15.60	EH Magnetic Door Holder & Releasing Device

16	Power Supplies & Door Control Modules
16.62	621 Value Series Power Supplies
16.63	Power Supply
16.64	Door Control Modules
16.65	AC Transformers
16.66	Power Supply Lock Capacity Chart
17	Exit Sense Bars & Switch Bars
17.68	PSB560 Sure Exit® Sense Bar
17.68	MSB550 REX Switch Bar
18	Switch & Status Kits
18.69	500 Series Exit Device REX Switch Kits
18.69	MS Series Latch & Deadbolt Monitoring Strike Kits
19	Key Switches
19.70	700, 800 Key Switches
20	Exit Switches & Egress
20.72	400 Exit Switches
75	Bollards, Bollard Exit Switch Kits
20.77	491 & 492 Emergency Release
20.77	15 Under Desk Switch
20.77	400 Communicating Bathroom Controls
20.78	400 Wall Mount Station Control
20.78	DPS, MC Door Status Switches
20.78	10TD Mini Timer
20.78	MD-31 PIR Request-To-Exit
21	Power Transfer Devices
21.80	PTH Power Transfer Hinge
21.81	PT, PTM Power Transfer Hinges & Devices
22	Control Consoles
22.82	DT, TCC, RCC Control Consoles
23	Communicating Bathrooms, Mantraps & Interlocks
23.84	Communicating Bathroom
23.85	Interlock - Both doors normally unlocked
23.85	Mantrap - One door normally locked and one door normally unlocked
23.86	Mantrap - Both doors normally locked
23.86	Elevator Lobby Door System
24	Index
24.87	Quick Reference Chart

Some products in this price book are protected by one or more of the following U.S. Patents. Foreign Patents are not shown.: 4,021,065; 4,099,752; 4,596,411; 4,609,910; 4,623,178; 4,623,181; 4,634,155; 4,641,867; 4,826,223; 4,986,581; 5,000,497; 5,006,723; 5,033,779; 5,141,271; 5,376,910; 5,429,399; 5,525,880; 5,564,228; 5,876,073; 6,363,363; 6,363,763; 7,540,542; 7,614,669; 7,698,918




Over 200 Access Hardware products available for immediate shipping.

East & West coast warehouses reduced time-in-transit
 • SDC - Camarillo, CA
 • SDC - Baltimore, MD



Dealers & Installers:
 Contact SDC to find out first hand which products your SDC distributor can expedite.



Scan QR Code to load ShipQuick Inventory list on your smartphone or visit at:
www.SDCSecurity.com/shipQuick



LIMITED WARRANTY

Security Door Controls (SDC) warrants that all new products sold by us are free from defects in material and workmanship and fit for the purpose intended by SDC when properly installed in accordance with the appropriate factory instructions and template for a period, from the date of shipment as follows:

Lifetime: EMLock Series electromagnetic locks and Exit Check Series Delayed Egress Electromagnetic Locks, excluding Exit Check delayed egress PC board assemblies, purchased since January 1, 2006 are warranted for the life of the product. Excel Series Electromagnetic Locks and 600 Series power supplies purchased since January 1, 2012 are warranted for the life of the product.

5 Years: All other SDC products, including Exit Check electronic PC Board Assemblies are warranted for 5 years

The extent of our liability for breach of warranty, when such is shown to our satisfaction, shall be limited to a functionally equivalent replacement, or repair of such product, or part thereof at SDC's sole discretion, when returned, delivery prepaid to SDC. We shall not, except to the extent this limitation may be precluded by law, be liable for inconvenience, labor costs, lost profit, damages to other property, injury or any other consequential or punitive damages resulting directly or indirectly from any product defect or breach of this warranty.

This warranty is limited to the original purchaser, is not transferable and shall not apply to changes of Oil Rubbed Bronze (613/US10B) finish, which is a living finish designed to change appearance through daily use, lamps, LED's, maintenance, wear and tear caused by normal use, altered product, abuse or negligence.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IS IN LIEU OF ALL OTHER WARRANTIES OF FITNESS AND MERCHANTABILITY.

SDC APP

Available on the **App Store**

It's on **ANDROID**



Mobile Resource

For Sales Calls, Onsite Installation, Dealers, Specifiers, & Engineers

20 Product Categories

Access Control Equipment
Electric & Mechanical Locking Devices

Video Library

Video Demos for Sales, Installations, Product & System Application

Document Library

PDF Datasheets, 3-Part Specs, Instructions, Templates & Cad

System Library

Cross Brand Compatible Riser & Point-To-Point System Wiring

Social Links

Latest News thru LinkedIn, Facebook, Twitter & YouTube

Print & Share

Print via WiFi or Bluetooth, Share Media Via Text or Email




Scan QR Code for iPhone, iPad



Scan QR Code for Android


BASIC COMPONENT CONSIDERATIONS FOR A SINGLE DOOR SYSTEM

1. **LOCKING DEVICE**
Electromechanical Bolt Lock
Electromagnetic Lock
Electric Strike
Electric Mortise Lock
Electrical Cylindrical Lock
Delayed Egress Lock
2. **ACCESS CONTROL**
Card Reader
Digital Keypad
Key Switch
3. **EXIT SWITCH**
Push Switch
Motion Detector
Request to Exit Push Bar®
4. **REMOTE CONTROL**
Desk Switch
Control/Monitoring Panel
(lock status sensors required)
5. **POWER SUPPLY AND DOOR CONTROL MODULE(S)**

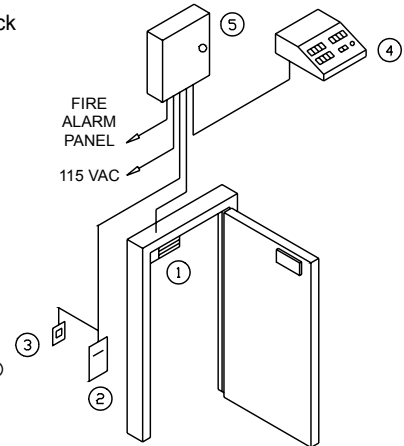

A 600 series power supply and time delay modules provide delayed re-locking, interface capability with alarm systems and access control components plus system documentation.

DOOR HANDS

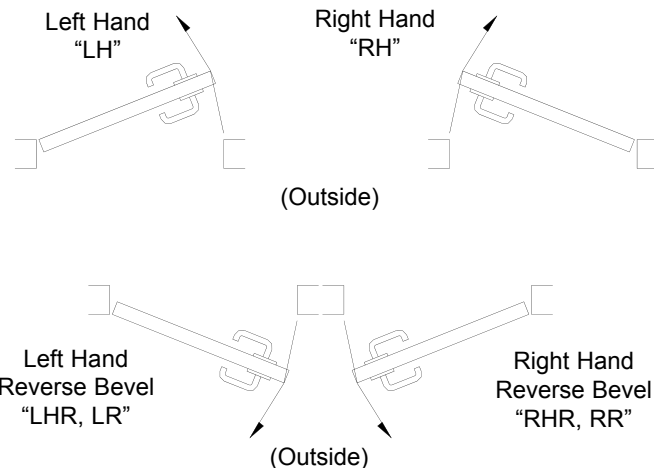

SALES POLICY

TERMS: A minimum purchase of \$2500.00 annually is required to maintain an open account with Security Door Controls.

RETURNED GOODS: Any defects or errors for which we are responsible will be promptly rectified. Approval for return of merchandise must be requested of us, and when granted the return authorization number must be displayed on all packages returned. Material found suitable for resale without reconditioning will be credited to customer's account less a handling and reprocessing charge of 35% of the net material value. Further charges will be assessed on material requiring rework to return it to saleable condition. Obsolete products will not be accepted for return. Custom products, special finish, options, size or pre-assembly configuration are considered special and are not returnable for credit. Incoming transportation charges are to be prepaid by the Buyer. Credits for material returned will have 2% deducted to cover the cash discount allowance on the original invoice.

ADDITIONAL TERMS: 2% - TEN (10) DAYS. Net thirty (30) days from date of invoice. Interest at 1-1/2% per month will be charged on unpaid balances beyond thirty (30) days. Orders received from 60+ day accounts will not be entered until account is current. It is understood that you may use your normal purchase order or other order forms in placing orders. However any such forms shall be used for convenience only and any terms or provisions which may be contained therein inconsistent with, or in addition to, those contained in our then current Acknowledgment to Customer form or other terms or provisions contained herein shall have no force or effect whatsoever. Custom material or wiring diagrams requires 50% deposit. At SDC's discretion, orders in excess of \$1500 net will be acknowledged by product category and department, and shipped on an "as ready" basis unless customer purchase order specifically states "Do not ship before _____," and "No partial shipments."

PRICES: Prices are subject to change without notice. No prices are guaranteed. All shipments will be made at prices prevailing at time of shipment. Errors or omissions in pricing are subject to correction.

PRICING POLICY: Shipments must be accepted within sixty (60) days after receipt of the order. Contracts extending beyond this period are subject to prices in effect at the time of shipment.

MINIMUM ORDER: Our minimum net invoice charge is \$250.

ACCEPTANCE: We reserve the right to decline an order, in whole or in part, when the price, quantity or assortment of goods is not satisfactory to us.

NOTE: SDC complete sales policy as stated in our price book prevails at all times.

CUSTOM SYSTEM DESIGN

Security, Life-Safety and Access Control. They demand the best, in planning, products and operation. So it's only good sense to work with a complete product package, and to begin with an expertly prepared, custom engineered design package from SDC. Detailed to your needs, one entrance or a complex multi-entrance system.

Every professional in the field knows all too well the usual problems. Wiring specs and wiring diagrams don't match up, components are improperly planned out or missing, projects slow down and costs start escalating.

Security Door Controls is prepared to assist you with a complete System Design Folder which eliminates any problems with component compatibility, system operation or wiring installation.

We provide what your particular job requires in electrical drafts,

CHANGE IN ORDERS: A charge of \$20.00 will be applied to each change on any order after said original order has been previously acknowledged by SDC, plus a cost incurred by manufacturing at point of change.

CANCELLATIONS: A charge of \$40.00 will apply in addition to any cost incurred by us for any cancellation made after our acknowledgment is issued. Custom architectural housings are non-cancelable. Orders for custom architectural housings, custom parts, special and optional plated finishes are non-cancelable.

FREIGHT: All goods are invoiced EXW (EXWorks) SECURITY DOOR CONTROLS. When delivered to the transportation company the shipments become the property of the purchaser, who assumes the risk of loss or damage in transit. All ground shipments will be made by United Parcel Service (UPS).

BACK CHARGES: We are not responsible for, do not authorize, and will not accept any charges for the cost of any labor or material incurred by anyone other than Security Door Controls for any installation, repair, service or replacement unless incurred with our prior written consent and agreement.

PRODUCT CHANGES: SDC reserves the right to modify, change, or discontinue any components as required.

SHORTAGES/ DISCREPANCIES: Claims must be made within ten (10) days after receipt of material. (The original invoice number will be required).

TEMPLATES: It shall be the customer's responsibility to check all templates requested from SDC for suitability for proper door and frame preparation. Direct mail requests for the door and frame supplier will not release this customer of this responsibility. Duplicates will be mailed to distributors.

ARBITRATION AND GOVERNING LAW: In the event of a dispute or controversy, or differences, which may arise between parties, any claim shall be settled by arbitration. The arbitration shall take place in California under the rules of the American Arbitration Association. The validity, interpretation, and performance of this agreement shall be controlled by and construed under the laws of the state of California, United States of America.

ACCEPTANCE: We reserve the right to decline an order, in whole or in part, when the price, quantity, or assortment of goods is not satisfactory to us.

instructions and data. It offers a great advantage for you, with time saved, a faster, easier, better job in every way.

General instructions. Job name. Supplier. SDC reference number and drawing numbers for easy reference when technical support is needed. System operation: a detailed outline of the complete operation. A full list of components with individual instruction data for each, conduit layout indicating quantity and gauge of wires. Point-to-point wire diagrams of all component connections.

All necessary data is a matter of record. In short, whatever that job requires in equipment, technical understanding or assistance, at the office or in the field, will be detailed in your SDC System Design Folder.

*SDC fees vary according to requirements.

ENGINEERING POLICY

Engineering services are available for special system design and documentation.

All requests must be submitted in writing with all detailed requirements before final quotation. Any alterations or omissions must also be submitted in writing and are subject to additional quotation.

SDC assumes no responsibility for information exchanged by

telephone regarding estimates or product suitability for verbally expressed systems. Fax requests will speed up the process and eliminate misunderstandings.


A non-cancelable purchase order for engineering is required before any engineering may proceed.

A signed Engineering Policy form is required for all system drafts.



M7200 MECHANICAL CYLINDRICAL LOCKSETS

Distributor Discount Code **ICK**

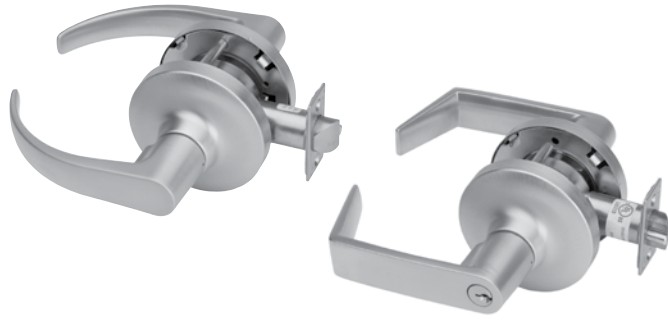

Grade 1 Cylindrical Locks

SDC M7200 Series locksets are designed for commercial, industrial and institutional use, where dependable operation and longevity is required along with high resistance to vandalism and abuse. Applications include office buildings, government centers, factories, schools and hospitals and more.

Internal clutch provides vandal resistance by permitting lever rotation without retracting latch when locked.

Independent heavy duty springs provide effective lever rotation and support.



M7200 MECHANICAL

M7201	Passage	175.00
M7202	Privacy	200.00
M7208	Entry	225.00
M7210	Classroom	225.00
M7212	Storeroom	225.00
M7224	Com	145.00
M7200E	Galaxy	80.00
M7200E	Galaxy	80.00

G1 Galaxy

ADD TO LIST

G1 Galaxy	E1 Eclipse	N/C
G5 Galaxy, I-Core prep	E5 Eclipse, I-Core prep	25.00
<i>G5 and E5 I-Core prep without I-Core</i>		

G5 Galaxy, I-Core prep

SPECIFY FINISH

Q 626 Dull Chrome (std)		N/C
C 605 Bright Brass	D 606 Dull Brass	50.00
H 613 Oil Rubbed Bronze	P 625 Bright Chrome	50.00

E5 Eclipse, I-Core prep

SPECIFY CYLINDER OR I-CORES

SDC Conventional Cylinders (Schlage 'C' Keyway Standard)			
6PKA 6 PIN Keyed alike	6PKD 6 PIN Keyed different (std)		N/C
SDC Interchangeable Core (Best 'A' Keyway)			
IC6P-KA 6 PIN I-Core, Small format, keyed alike	IC6P-KD 6 PIN I-Core, Small format, keyed different		50.00
IC7P-KA 7 PIN I-Core, small format, keyed alike	IC7P-KD 7 PIN I-Core, Small format, keyed different		50.00

SPECIFY LATCHBOLT

B1 2-3/4" dead latch (std)	B2 2-3/8" dead latch	N/C
B3 2-3/4" spring latch, passage (std)	B4 2-3/8" spring latch, passage	POA
B5 2-3/4" spring latch, privacy (std)	B6 2-3/8" spring latch privacy	POA
BE 5" backset extension, for use with 2-3/4" latch only		POA

SPECIFY STRIKE

ST1 ANSI 1-1/4" x 4-7/8" (std)	ST2 T-Strike with dust box, 1-1/8" x 2-3/4"	N/C
ST3 Full lip strike, 1-5/8" x 2-1/4"	ST4 Full lip strike with round corner, 1-5/8" x 2-1/4"	POA

Discontinued





New Schlage Equivalent 07 and 12 Levers

M7800 MORTISE LOCKSETS

Distributor Discount Code **IMK**



Grade 1 Mortise Locksets

SDC Heavy Duty Mortise Locks comply with American National Standard Institute requirement ANSI/ BHMA 156.13 Grade 1. All our locks are field reversible and require only simple steps for changing the hand of lock for easy installation.

- Reversible without disassembly
- May retrofit other brand locksets (consult factory)
- Clutch for vandal resistance
- UL listed "A" label (3 hours) fire exit hardware in accordance with UL 10C, UBC 7-2(1997) (Mortise cylinder not included)

M7800 MORTISE LOCKSET

LIST

M7801	Passage	450.00	M7820	Entrance	550.00
M7804	Office	500.00	M7822	Privacy	500.00
M7805	Classroom	550.00	M7871	Single Dummy Trim	
M7807	Storeroom	500.00	M7872	Double Dummy Trim	
M7809	Apartment Entrance /Vestibule	550.00	M7875	Single Dummy Trim	
M7813	Corridor / Exit	550.00	M7876	Double Dummy Trim	500.00

SPECIFY HAND

L	Left hand	LR	Left Hand	N/C
R	Right hand	RR	Right Hand	N/C

SPECIFY FINISH

Add to List



Q 626 Dull Chrome	50.00	G 612 Dull Bronze	50.00	S 629 Bright Stainless Steel	50.00
612 Dull Bronze	50.00	H 613 Oil Rubbed Bronze	50.00	U 630 Dull Stainless Steel	50.00
629 Bright Stainless Steel	50.00	P 625 Bright Chrome	50.00		

SPECIFY TRIM

Add to List

G	Galaxy with Rose (std)	E	Eclipse with Rose (std)	N	Nova with Rose (std)	N/C
GE	Galaxy with Escutcheon	EE	Eclipse with Escutcheon	NE	Nova with Escutcheon	100.00
07	Schlage equal with SDC B rose	N/C		07E	Schlage equal with SDC escutcheon	100.00
12	Schlage equal with SDC B rose	N/C		12E	Schlage equal with SDC escutcheon	100.00

Dummy Trim

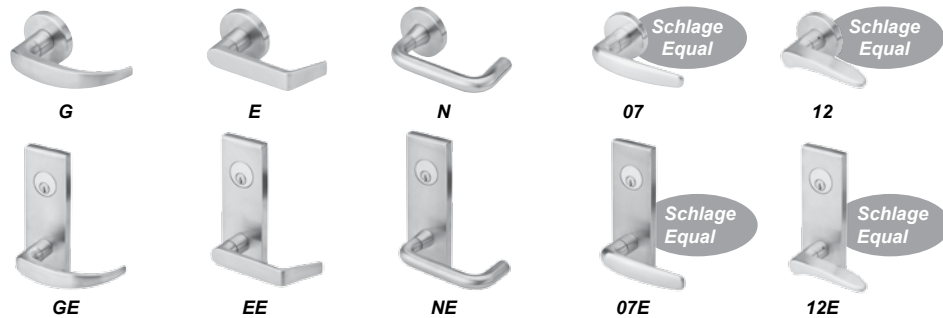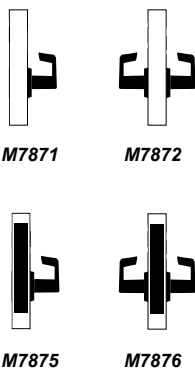


SPECIFY KEY CYLINDERS

Add to List

CYL-6KDQ	6 pin, 1.125" mortise cylinder, keyed different, dull chrome	30.00
CYL-6KAQ	6 pin, 1.125" mortise cylinder, keyed alike, dull chrome	30.00

LATCH AND DEADBOLTS MONITORING STRIKE KITS

Distributor Discount Code **DK** List

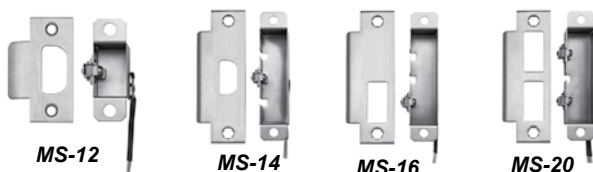

see page 18.69 for ordering information



RIM DEVICES STANDARD STRIKES

SURFACE / Standard VERTICAL ROD DEVICES Strike

Rim Strikes List



ST1P
Standard for S6100P
Projection: 13/16" (21mm)



ST1F
Standard for S6100F
Projection: 13/16" (21mm)


Optional Mullion Strike List




Optional for mullion application

ST1MP **ST1MF** 68.00
For 6100P For 6100F
Projection: 7/8" (22.5mm)

Top Strikes List



ST2P
Standard top strike for S6200P
Projection: 29/32" (23mm)




ST2F
Standard top strike for S6200F
Projection: 1-1/8" (29mm)

Bottom (Floor) Strikes List




ST28P
Standard floor strike for S6200P



ST28F
Standard floor strike for S6200F
Mortise: 2-1/4" (57mm)

Optional Threshold Strikes List



ST28T 14.00
Optional floor strike for using threshold openings

Projection: 3/8" (9.5mm)

see pages 8.30 through 8.35 for electrical options

MORTISE STRIKE List



For use on 1-3/4" standard or 2-1/4" thick single door, and 2-1/4" double door with overlapping astragal and coordinator

ST3F **ST3P**
Standard for S6300F Standard for S6300P

OPTIONAL DOUBLE DOOR STRIKE List



ST2DF 48.00
Optional for pairs of doors with rim mount device.

Projection: 1-15/16" (49mm)

REMOVABLE MULLION List



KR90F 650.00
Standard Key Removable Mullion
For Panic Exit and Fire Exit Rim Mount Devices.
Length: 8ft
Material: 2" 11 Gauge Steel Tube
Finish: Primer gray



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012



918 INDOOR EntryCheck™

Distributor Discount Code **JK LIST**



ELECTRICAL SPECIFICATIONS

Voltage: 12/24 VAC/DC
Current: 30mA typical, 150mA maximum
Outputs: Relay 1 - SPDT 5 Amps @ 30VDC, Relay 2 - SPDT 2 Amps @ 30VDC, Switch to Common Outputs 3 & 4 - 100mA @ 30VDC
Dimensions: 3"W x 4-3/4"H x 1-1/2"D (1/4" wall projection)

918 500 user codes, 1 to 6 digits in length, 4 outputs, 2 relay and 2 solid state outputs timed or latching (on/off). Assign entry PIN's to relays 1 and/or 2. Tactile keys with selectable audible volume for key depression or output activation. LED Status: Access, lockout. Timed anti-passback. Keypad tamper lockout. Request-to-Exit/Enter input. Indoor blue backlit, moisture resistant keypad. Thick S.S. faceplate 3/32" (2mm). **160.00**

SPECIFY FINISH

Add to List

U	630 Brushed Stainless Steel (standard)	N/C	H	613 Oil Rubbed Bronze	60.00
C	605 Bright Brass	60.00	P	625 Bright Chrome	60.00
D	606 Dull Brass	60.00			

OPTIONS

Add to List

TR12 Plug in power supply (optional) 120 VAC primary, Output: 12VDC @ 1Amp, Secondary screw terminals with ground terminal **72.00**



920/920P INDOOR/OUTDOOR EntryCheck™

Distributor Discount Code **JK LIST**



920



920P



The 920 Series EntryCheck™ stand-alone digital keypad is designed to control access of a single entry point with up to 500 users. Each user is assigned a personal identification number (PIN). Keypad entry of a valid one to six digit code activates one or both of the output relays which releases an electric door lock. Heavy Cast Vandal Resistant Housing. Heavy Cast Metal Blue Backlit Keys.

ELECTRICAL SPECIFICATIONS

Voltage: 12/24 VAC/DC
Current: 30mA typical, 150mA maximum
Outputs: Relay 1 - SPDT 5 Amps @ 30VDC, Relay 2 - SPDT 2 Amps @ 30VDC, Switch to Common Outputs 3 & 4 - 100mA @ 30VDC
Operating Temperature: -20°F to + 130°F (-30°C to + 54°C)
Operating Humidity: 5% to 95% non-condensing
Housing: 3"W x 5-3/4"H x 1-7/16"D

920 Stand alone digital keypad **175.00**
920P Stand alone digital keypad with Prox Reader **475.00**

CARDS AND KEY FOBS

see page 3.13

ACCESSORIES

ADD to List


900-PS Privacy & Rain Shroud for stand alone digital keypads 918 and 920. Ensure protection from rain and security from spying eyes. **96.00**



900-PS with 920 Keypad



900-PS with 918 Keypad



900-PS with 920 Keypad post mounted





923 NARROW INDOOR/OUTDOOR EntryCheck™

Distributor Discount Code JK LIST

The 923 Series EntryCheck™ narrow stand-alone digital keypad is designed to control access of a single entry point with up to 500 users. Each user is assigned a personal identification number (PIN). Keypad entry of a valid one to six digit code activates one or both of the output relays which releases an electric door lock. Heavy Cast Vandal Resistant Housing. Heavy Cast Metal Blue Backlit Keys.

ELECTRICAL SPECIFICATIONS

Voltage: 12/24 VAC/DC**Current:** 30mA typical, 150mA maximum**Outputs:** Relay 1 - SPDT 5 Amps @ 30VDC

Relay 2 - SPDT 2 Amps @ 30VDC

Switch to Common Outputs 3 & 4 - 100mA @ 30VDC

Operating Temperature: -20°F to + 130°F (-30°C to + 54°C)**Operating Humidity:** 5% to 95% non-condensing**Housing:** 1-3/4"W x 7-5/16"H x 1-3/8"D

923



923P



923	Stand alone digital keypad, narrow	200.00
923P	Stand alone digital keypad, narrow, with Prox Reader	500.00

CARDS AND KEY FOBS

see page 3.13



921P/924P INDOOR/OUTDOOR 2-PIECE EntryCheck™

Distributor Discount Code JK LIST

The 921P and the 924P EntryCheck™ stand-alone digital keypad with Prox Reader and Controller (2-piece configuration) are designed to control access of a single entry point with up to 500 users. Each user is assigned a personal identification number (PIN). Keypad entry of a valid one to six digit code activates one or both of the output relays which releases an electric door lock. Heavy Cast Vandal Resistant Housing. Heavy Cast Metal Blue Backlit Keys.

ELECTRICAL SPECIFICATIONS

Voltage: 12/24 VAC/DC**Current:** 30mA typical, 150mA maximum**Outputs:** Relay 1 - SPDT 5 Amps @ 30VDC

Relay 2 - SPDT 2 Amps @ 30VDC

Switch to Common Outputs 3 & 4 - 100mA @ 30VDC

Operating Temperature: -20°F to + 130°F (-30°C to + 54°C)**Operating Humidity:** 5% to 95% non-condensing**Housing:** 921P: 3"W x 5-3/4"H x 1-7/16"D 924P: 1-3/4"W x 7-5/16"H x 1-3/8"D

921P

924P

921P	Stand alone, surface mount digital keypad, with Prox Reader and Controller	575.00
924P	Stand alone, surface mount digital keypad, narrow, with Prox Reader and Controller	600.00

CARDS AND KEY FOBS

see page 3.13

SDG

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective October 1, 2012



E75 EntryCheck™ STANDALONE ELECTRONIC LOCKSET

Distributor Discount Code **MMK**

3 - Stand Alone Access Control



The E75 EntryCheck® is a standalone electronic battery powered solution, providing controlled access for basic and multi-level high security requirements. The E75 lockset is keypad programmable, and combines multiple access technology with efficient motorized locksets. E75 series can be retrofitted to existing prep for cylindrical locks.

Keypad Features

- Keypad Programmable
- 3,000 Users, 32 Temporary
- 4 to 6 Digit PIN Codes
- 3 Passage Mode Option
- 32 Access Groups, Schedules
- 32 Holidays

- 4 Authority Levels
- Keypad Tamper Lockout
- Mechanical Key Override
- Battery Powered (4AA)
- Blue Backlit Cast Metal Keys
- Weather & Vandal Resistant

Lockset Features

- Retrofit Existing Lock Prep
- Motorized SDC Cylindrical
- Heavy Duty ANSI Grade 1
- ANSI 4 7/8 Strike
- Vandal Resistant Lever



Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com



E75 EntryCheck™		LIST
E75K	Digital Keypad only	710.00
E75P	Digital Keypad with Prox Reader	910.00



G1 Galaxy



E1 Eclipse



G5 Galaxy, I-Core prep



E5 Eclipse, I-Core prep

SPECIFY KEYPAD FINISH		Add to List	
Q	626 Dull Chrome (standard)	B	Black N/C
P	625 Bright Chrome	C	605 Bright Brass 50.00

SPECIFY LEVER HANDLE		Add to List	
G1	Galaxy	E1	Eclipse N/C
G5	Galaxy, I-Core prep	E5	Eclipse, I-Core prep 25.00

G5 and E5 I-Core prep without I-Core

SPECIFY LEVER LOCKSET FINISH		Add to List	
Q	626 Dull Chrome (standard)		N/C
P	625 Bright Chrome	C	605 Bright Brass 50.00

CARDS AND KEY FOBS		Distributor Discount Code MV	List
HID1326-25	HID ProxCard® II, 25 cards		160.00
HID1326-100	HID ProxCard® II, 100 cards		640.00
HID1346-10	HID ProxKey® II, 10 key fobs		130.00
HID1346-100	HID ProxKey® II, 100 key fobs		1280.00





930 ENTRYCHECK™ INTEGRATED KEYPAD

Distributor Discount Code **MK**

930Y



All electronics are built-in the narrow keypad. Features include: 5 button keypad, 6 user codes, 3-8 digits, Request-to-exit input, Anti-tailgating, 1 relay output, 2 voltage outputs, latching or momentary, 1 - 120 second timer, tamper alarm, keypad lockout, 10 mA standby, 100 mA active @ 12/24V AC/DC.

MODEL	KEYPAD STYLE	LIST
930Y	Black, illuminated (standard)	365.00



931 ENTRYCHECK™ KEYPAD and CONTROLLER

Distributor Discount Code **MK**

One master and six user codes 3 to 8 digits in length. Two SPDT relay outputs, momentary unlock and manual latching outputs, anti-tailgating, tamper alarm, REX input, non-volatile memory, 15 ft cable, 12/24V AC/DC



SPECIFY KEYPAD

MODEL	KEYPAD STYLE	LIST
931 KP-3U	Black, with stainless steel face	810.00
931 KP-4U	Black, with stainless steel face	980.00

OPTIONS

OPTION	DESCRIPTION	LIST
TWC-15	Replacement 15ft. Touch pad cable wiring	80.00
KP-3AP	Adapter plate for KP-3 keypad mounting to single gang box	35.00



E4KP Entry Check™ STANDALONE PROX & KEYPAD READER

Distributor Discount Code **JK**



The E4KP EntryCheck™ is a standalone proximity access control reader. It is keypad programmable and does not require software and computer. 12VDC @ 120 mA Max.

- HID Compatible Proximity and PIN Reader
- Remote Controller Module
- Up to 650 Users
- Lock and Auxiliary outputs
- Duress or Door Prop alarm output
- Request-to-Exit Input
- Door contact input
- Access mode selectable
 1. Proximity card only
 2. Proximity card + PIN
- 32°F to 122°F

MODEL	KEYPAD STYLE	LIST
E4KP	HID compatible Prox and PIN Reader with relay module	230.00

CARDS AND KEY FOBBS

MODEL	DESCRIPTION	LIST
HID1326-25	HID ProxCard® II, 25 cards	160.00
HID1346-10	HID ProxKey® II, 10 key fobs	130.00
HID1326-100	HID ProxCard® II, 100 cards	640.00
HID1346-100	HID ProxKey® II, 100 key fob	1280.00



E72 K - A CIVIC SERIES 160 USER CYLINDRICAL LOCKSET

Distributor Discount Code **MMK**

The E72K-A Civic is a 160 user battery powered cylindrical digital door lock that incorporates the basic features required to accommodate most stand alone access control applications.

Programmable Features

- Keypad programmable
- 160 users
- Temp users schedules (64 users max)
- 9 management groups
- 90 user groups
- 16 button alphanumeric keypad
- 3 or 6 digit user code, ID + PIN or PIN only
- Auto Daylight Savings
- Manual passage mode
- Dual code entry capability by two users for high security applications

E72 K - A CIVIC SERIES

MODEL	DESCRIPTION	LIST
E72K-A	160 users, 2 3/4" strike, No Audit Trail, Black Powder Coat	950.00

SPECIFY LEVER HANDLE

Lever Handles with Schlage "C" Keyway, 6 pin Standard Key Cylinders **N/C**

G1	Galaxy lever	E1	Eclipse lever
----	--------------	----	---------------

SPECIFY FINISH

MODEL	DESCRIPTION	LIST
B	Black Powder Coat case with Dull Chrome lever (standard)	N/C

SPECIFY OPTIONS

MODEL	DESCRIPTION	LIST
BS1	2.375" (60mm) backset	30.00
SK-1	Spacer kit for 1.375" door thickness	65.00
ST1	ANSI 4 7/8" strike	N/C
WGB	E72 Weldable Gate Box	150.00




G1




E1

STANDALONE CONFIGURATION

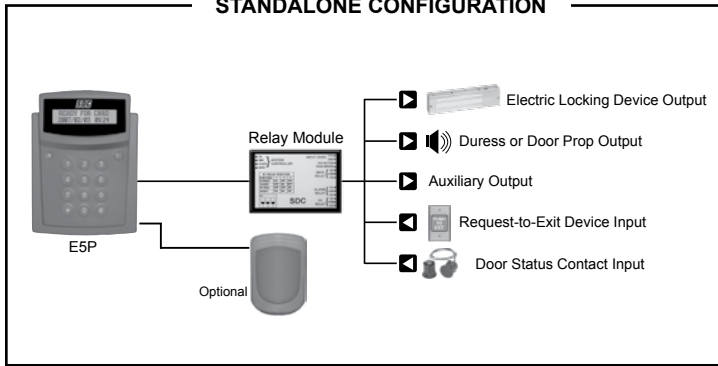

NETWORK CONFIGURATIONS

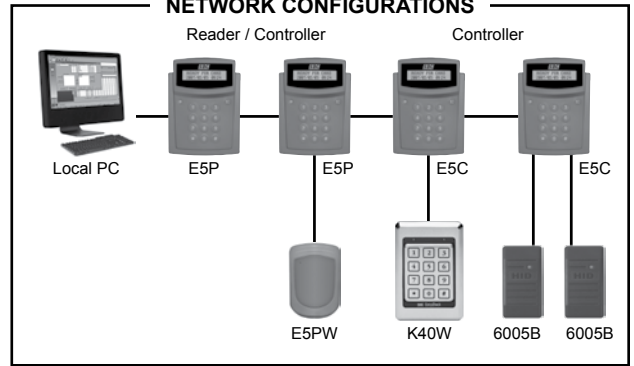

Price List Effective October 1, 2012



E5P Entry Check™ PC Managed or Standalone Access Control

Distributor Discount Code **MK**

- HID Compatible Proximity and PIN Reader
- Standalone or PC managed
- Network up to 99 readers
- Up to 3000 Users
- E5P Access mode selectable
 1. Proximity card only
 2. Proximity card + PIN
- 12VDC @ 300 mA Max.



E5P, E5C



E5PW



E5KPW

SPECIFY MODEL

LIST

MODEL	SINGLE DOOR	LIST
E5P	HID compatible Prox and PIN Reader, Controller and remote relay module Second Wiegand reader may be added for in/out control	675.00
E5C	Controller only less reader with relay module, Wiegand reader compatible Specify 1 or 2 Wiegand readers separately	620.00

CARD AND KEYPAD READERS - WIEGAND FORMAT

LIST

Required with E5C, specify 1 or 2
Optional second reader for E5P in-out control

6005B	HID proximity reader	260.00
E5PW	SDC proximity reader, HID Compatible	180.00
E5KPW	SDC proximity and PIN reader, HID Compatible	200.00
K30W	Narrow keypad reader	300.00
K40W	1 gang keypad reader, heavy duty stainless steel	400.00

PC DATA INTERFACE HARDWARE

LIST

E5DI-1	RS485 to USB data converter for 1 PC	120.00
E5DI-2	RS485/TCP/IP data converter for multiple PC's Network switch required by others	500.00

CARDS AND KEY FOBS

Distributor Discount Code **MV** **LIST**

HID1326-25	HID ProxCard® II, 25 cards	160.00
HID1326-100	HID ProxCard® II, 100 cards	640.00
HID1346-10	HID ProxKey® II, 10 key fobs	130.00
HID1346-100	HID ProxKey® II, 100 key fobs	1280.00



6005B



K30W



K40W



E5DI-1



E5DI-2



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com





ELECTRA MOD™ MAJOR BRAND LOCKS ELECTRIFIED BY SDC

Distributor Discount Code **LEK**



Schlage



Sargent



Best



Yale



Dorma

SDC's Electra™ Mod locksets ensure that the door stays latched even when unlocked, maintaining fire door integrity. The Electra™ Mod locksets comply with all national building and fire life safety code requirements for use on fire rated doors, including high-rise stairwell and elevator lobby doors where the use of electric strikes and magnetic locks is prohibited.

Features

- Outside lever normally locked, turning inside lever provides uninhibited egress
- Request-to-exit output optional with all locksets
- Dual Voltage 12 and 24VDC
- Choice of failsafe or failsecure operating mode

Specifications

Voltage: Dual 12/24VDC Input
Current: 600/300mA @ 12/24VDC
REX Output: SPDT 3 Amps @ 30VDC
Latchbolt: 1/2" throw

Backset: 2-3/4"
Strike: 4-7/8" ANSI A115.2
Door Thickness: 1-5/8" to 2-1/8"



Electrically Controlled Single Point Locks & Latches, 3 Hr A Label Fire Doors



HOW TO ORDER

DISTRIBUTOR SUPPLIED MECHANICAL LOCKSET SDC FACTORY ELECTRIFIED

LIST

Distributors to supply SDC with cylindrical lock for modification. SDC returns modified lock to distributor

S	Schlage	ND80PD	P	Yale	5405LN	160.00
T	Best	93K7D	D	Sargent	10G04	160.00
U	Dorma	C880				160.00
		Failsafe		Failsecure		
	Schlage	S7250		S7252		160.00
	Yale	P7250		P7252		160.00
	Best	T7250		T7252		160.00
	Sargent	D7250		D7252		160.00
	Dorma	U7250		U7252		160.00
	REX	request-to-exit output, SPDT, 3 Amps @ 30VDC				120.00

SDC SUPPLIED MECHANICAL LOCKSET

LIST

In Stock: Following SDC electrified locksets are in stock at both SDC east and west coast warehouses for immediate shipment the same day or by the next business day.

Schlage Failsafe and Failsecure electrified locksets provided by SDC

SDC Failsafe	SDC Failsecure	Trim Type	
ZS7250ATHQ	ZS7252ATHQ	Athens	680.00
ZS7250SPAQ	ZS7252SPAQ	Sparta	680.00
ZS7250RHOQ	ZS7252RHOQ	Rhodes	680.00
ZS7250TLRQ	ZS7252TLRQ	Tubular	680.00
ZS7250OMEQ	ZS7252OMEQ	Omega	680.00

Sargent Failsafe and Failsecure electrified locksets provided by SDC

SDC Failsafe	SDC Failsecure	Trim Type	
ZD7250BQ	ZD7252BQ	B	780.00
ZD7250JQ	ZD7252JQ	J	780.00
ZD7250LQ	ZD7252LQ	L	780.00
ZD7250PQ	ZD7252PQ	P	780.00

Yale Failsafe and Failsecure electrified locksets provided by SDC

SDC Failsafe	SDC Failsecure	Trim Type	
ZP7250AUQ	ZP7252AUQ	Augusta	696.00
ZP7250MOQ	ZP7252MOQ	Monroe	696.00
ZP7250PBQ	ZP7252PBQ	Pacific Beach	696.00

Best Failsafe and Failsecure electrified locksets provided by SDC

SDC Failsafe	SDC Failsecure	Trim Type	
ZT725014Q	ZT725214Q	14	825.00
ZT725015Q	ZT725215Q	15	825.00
ZT725016Q	ZT725216Q	16	825.00



Athens



Rhodes



Sparta



Tubular



Omega



B



J



L



P



Augusta



Monroe



Pacific Beach



14



15



16



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012



ELECTRA PRO™ SDC' Z7200 SERIES HEAVY DUTY CYLINDRICAL LOCKSETS

Distributor Discount Code **LEK**

Function: 7200 series locksets are locked on the outside and unlocked from the exterior by an access control or mechanical key. The inside lever is always operable for uninhibited egress.

Request-to-Exit Output: Standard with all SDC brand Z7200 locksets. SPDT, 3 Amps @ 30VDC

Features

- Choice of failsecure or failsafe mode
- Dual 12/24 VDC
- **REX** output: Z7200 **standard**
- 'C' type keyway, BEST IC core optional
- Independent lever power return springs
- Power Regulator Module included

Specifications

- Dual Voltage, 600/300 mA @ 12/24VDC
- Exceeds ANSI A156-2-4000 Grade 1
- 0.5625" latchbolt
- 2.75" Backset
- 4.875 strike ANSI A115.2
- Door thickness 1-3/4" to 2-1/8"



Electrically Controlled Single Point Locks & Latches, 3 Hr A Label Fire Doors



3773-0324-104



Price List Effective October 1, 2012

5 - Electrified Cylindrical Locksets



Electra Pro™ Z7250G



Electra Pro™ Z7250E



G Galaxy



E Eclipse



G5 Galaxy, I-Core prep



E5 Eclipse, I-Core prep



I-CORE

SPECIFY MODEL

LIST

Electra Pro™ Locks

Z7250	SDC Failsafe, with REX Output	Z7252	SDC Failsecure, with REX Output	420.00
--------------	-------------------------------	--------------	---------------------------------	---------------

SPECIFY LEVER TRIM

SDC Lever Trim

G	Galaxy	E	Eclipse	N/C
G5	Galaxy, I-Core prep	E5	Eclipse, I-Core prep	25.00

G5 and E5 I-Core prep without I-Core

SPECIFY FINISH

Add to List

Q	626 Dull Chrome (standard)	N/C		
C	605 Bright Brass	50.00	H	613 Oil Rubbed Bronze 50.00
D	606 Dull Brass	50.00	P	625 Bright Chrome 50.00

OPTIONAL CYLINDER and I-CORES

Add to List

SDC Conventional Cylinders (Schlage 'C' Keyway Standard)

6PKA	6 PIN Keyed alike	N/C	6PKD	6 PIN Keyed different (standard)	N/C
-------------	-------------------	------------	-------------	----------------------------------	------------

[IC] Interchangeable Core (Best 'A' Keyway Standard)

IC7P-KA	7 pin I-Core, small format, keyed alike	50.00	IC7P-KD	7 pin I-Core, small format, keyed different	50.00
----------------	---	--------------	----------------	---	--------------

OPTIONAL LATCH AND BACKSET ASSEMBLIES

B1	2-3/4" Backset latchbolt (Standard)	N/C		
-----------	-------------------------------------	------------	--	--

OPTIONAL STRIKE PLATES

ST1	ANSI 1-1/4" x 4-7/8" (Standard)	N/C	ST2	T-Strike with dust box, 1-1/8" x 2-3/4"	N/C
------------	---------------------------------	------------	------------	---	------------

MUST BE SPECIFIED

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com





New Schlage Equivalent 07 and 12 Levers

SELECTRIC™ PRO Z7800 ELECTRIC LOCKSET **UL US LISTED**

Distributor Discount Code **LSK**

SELECTRIC® PRO locksets incorporate an SDC manufactured Grade 1 Heavy Duty mortise lockset and vandal resistant clutch mechanism. Proprietary to SDC, SELECTRIC® PRO locksets. All operational attributes are field selectable. In addition, SELECTRIC® PRO locksets retrofit many other mechanical lock brands making them fully compatible with new and retrofit applications.

Field Selectable Attributes


- Selectable mode, failsafe or failsecure
- Selectable function, locked outside only or both sides
- Selectable voltage, 12 or 24VDC
- Selectable handing



Electrically Controlled
Single Point Locks or
Latches
3 Hr A Label Fire
Rated Doors



3773-0324-104



SPECIFY FUNCTION AND MODE

LIST

SDC Supplied Electrified Lock (Mortise cylinder not included). SDC Brand 7800 lockset. Clutch for lever trim vandal resistance. * Less trim - compatible with Schlage trim

		* Less Trim	With SDC Trim
Z7830	Locked both sides, failsafe. Field reversible to failsecure mode.	295.00	710.00
Z7850	Locked outside only, failsafe. Field reversible to failsecure mode.	295.00	710.00
Z7832	Locked both sides, failsecure. Field reversible to failsafe mode.	295.00	710.00
Z7852	Locked outside only, failsecure. Field reversible to failsafe mode.	295.00	710.00
Z7835	Locked outside and/or inside. Outside failsecure, inside failsafe	450.00	820.00

Voltage - Z7835 Only

Specify voltage for Z7835 function only. Leave blank for all other functions which are 12/24VDC, field selectable

12 12VDC	24 24VDC	N/C
----------	----------	-----

SPECIFY HAND

L Left hand	LR Left hand reversed	All hands are field reversible	N/C
R Right hand	RR Right hand reversed	without disassembly	N/C

SPECIFY FINISH

Add to List

Q 626 Dull Chrome (standard)	N/C	G 612 Dull Bronze	50.00	S 629 Bright Stainless Steel	50.00
C 605 Bright Brass	50.00	H 613 Oil Rubbed Bronze	50.00	U 630 Dull Stainless Steel	50.00
D 606 Dull Brass	50.00	P 625 Bright Chrome	50.00		
F 611 Bright Bronze	50.00				

SPECIFY LEVER TRIM

Add to List

G Galaxy with rose	N/C	GE Galaxy with escutcheon	100.00
E Eclipse with rose	N/C	EE Eclipse with escutcheon	100.00
N Nova with rose	N/C	NE Nova with escutcheon	100.00
07 Schlage equal with SDC B rose	N/C	07E Schlage equal with SDC escutcheon	100.00
12 Schlage equal with SDC B rose	POA	12E Schlage equal with SDC escutcheon	POA

OPTIONS AND ACCESSORIES

Add to List

Optional Outputs

R Request-to-exit. Indicates inside lever operation for access control request-to-exit input, alarm shunt, remote annunciation or CCTV activation, SPDT 5 Amp @ 30VDC	80.00
D Door position status output. Indicates door open and door closed. SPDT 5 Amp @ 30VDC.	80.00
S Latched & locked status output. Indicates door latched and locked and door unlocked. SPDT 5 Amp @ 30VDC	100.00

Optional Cable and Connectors

CC1-5 5ft. Cable and connectors for locks <u>without</u> optional outputs	45.00
CC3-5 5ft. Cable and connectors for locks <u>with</u> optional outputs	60.00

Optional Key Cylinders 1 required for 7850/7852 2 required for 7830/7832 **30.00**

CYL-6KDQ 6 pin, 1.125" keyed different, 626 Dull Chrome **30.00**

CYL-6KAQ 6 pin, 1.125" keyed alike, 626 Dull Chrome **30.00**

Power Transfer Hinge

UL listed, 4.5", five knuckle hinge. Special finish available

PTH-4Q Four wire, dull chrome **150.00**

PTH-10Q Ten wire, dull chrome **195.00**

PTH-2+4Q 6-wire Electric Hinge 1-pair 16 Amp inrush, 4 Amp continuous; 2-pair 1 Amp @ 12/24V **175.00**



PTH
UL 10B Listed for 3Hr
Fire Rated Doors
See page 79



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012



SELECTRIC™ MOD 7800 SERIES LOCKSETS



Distributor Discount Code **LSK**

Send the brand lockset of your choice to SDC for electrification. When factory authorized, distributors may take advantage of SDC's mechanical lock inventory to expedite orders. **SDC stocks Schlage, Corbin Russwin, Yale, Best and Sargent mechanical locks that may be electrified and charged to an order.** Meanwhile, distributors may then send replacement mechanical locks to SDC for credit and SDC inventory replenishment.

Features Schlage S and ZS only

- Field selectable failsafe / failsecure
- Field selectable voltage, 12/24VDC
- Field selectable function and handing without removing cover

Features All Other Brands

- Field selectable voltage, 12/24VDC
- Field selectable function and handing based on brand capability

SPECIFY BRAND MODEL

LIST

Distributors supply SDC with the mortise lock body and armored front (less trim) for modification. SDC returns the modified lock body. Upon installation, two lever return spring cages (supplied by distributor) are required for proper operation.

A Falcon - LM561/MA581	P Yale - 8805	V Marks - 5EW	160.00
D Sargent - 8204	S Schlage - L9080	W Cal Royal - M8080	160.00
I Corbin/Russwin - ML2055	T Best - 35HEW/45H	X PDQ - MR148	160.00
N Arrow - B12	U Dorma - M9000		160.00

Note: Two locking hubs required for 7830 & 7832

Electrified lock chassis, less trim, provided by SDC factory are special order, no cancellation, no return.

ZS Schlage	ZN Arrow	ZD Sargent	ZT Best	POA
-------------------	-----------------	-------------------	----------------	------------

ZA Falcon	ZP Yale	ZI Corbin Russwin	NOTE: All locks supplied less cylinder
------------------	----------------	--------------------------	---

SPECIFY FUNCTION & ELECTRICAL MODE

Add to List

7830 Locked both sides, failsafe.	7832 Locked both sides, failsecure.	60.00
7850 Locked outside only, failsafe.	7852 Locked outside only, failsecure.	N/C

Schlage S and ZS only

- Field selectable failsafe / failsecure
- Field selectable function without removing cover

SPECIFY HAND

L Left hand	LR Left hand reversed	R Right hand	RR Right hand reversed	N/C
--------------------	------------------------------	---------------------	-------------------------------	------------

SPECIFY FINISH

Add to List

Q 626 Dull Chrome (standard)	N/C				
C 605 Bright Brass	50.00	G 612 Dull Bronze	50.00	S 629 Bright Stainless Steel	50.00
D 606 Dull Brass	50.00	H 613 Oil Rubbed Bronze	50.00	U 630 Dull Stainless Steel	50.00
F 611 Bright Bronze	50.00	P 625 Bright Chrome	50.00		

OPTIONS AND ACCESSORIES

Add to List

Optional Outputs


R Request-To-Exit. Indicates inside lever operation for access control request-to-exit input, alarm shunt, remote annunciation or CCTV activation, SPDT 5 Amp @ 30VDC Available with A, D, I, N, P, S, T, U, V and ZS only.	120.00
D Door Position Status Output Indicates door open and door closed. SPDT 5 Amp @ 30VDC Available with locks S and ZS only.	80.00
S Latched & Locked Status Output Indicates door latched and locked or door unlocked. SPDT 5 Amp @ 30VDC Available with locks S and SZ only.	100.00
L Latchbolt status. Indicates door latched and unlatched status. SPDT 5 Amp @ 30VDC Available with locks A, D, I, N, P, S, T, U, V and ZS only.	100.00

Consult factory for recent updates of option availability with any model


Optional Cable and Connectors

CC1-5 5ft. Cable and connectors for locks <u>without</u> optional outputs	45.00
CC3-5 5ft. Cable and connectors for locks <u>with</u> optional outputs	60.00

Price List Effective October 1, 2012

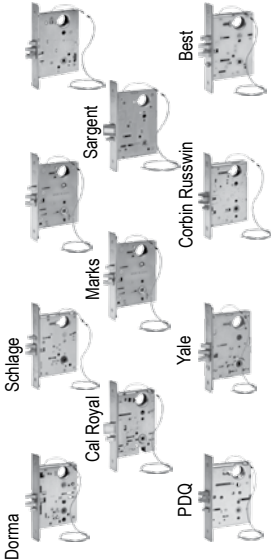

Electrically Controlled Single Point Locks or Latches
3 Hr A Label Fire Rated Doors



3773-0324:104



PTH
UL 10B Listed for 3Hr Fire Rated Doors
See page 21.80

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com



6 - Electrified Mortise Locksets



HiTower – Electric Frame Actuator Controlled Locksets


The HiTower utilizes SDC's original concept of utilizing an electric frame actuator to control a mechanical lock in the door, eliminating the cost and labor associated with a power transfer hinge and wires through the door.

HiTower Z7500

- SDC brand Grade 1 Heavy Duty lockset
• Field selectable function, Locked outside only or both sides


HiTower Conversions

Distributors provide a new mechanical lock brand of choice to the factory for conversion to an electric frame actuator controlled lockset.




UL LISTED

Electrically Controlled Single Point Locks or Latches
3 Hr A Label Fire Rated Doors



Z7500



SDC S6303FH



O7550 Yale Conversion

SPECIFY SOURCE OF MORTISE LOCK

HiTower® Pro - SDC supplied mortise lock and electric frame actuator, complete with lever trim (Cylinder not included)

Z SDC lockset ZR SDC Retrofit lockset, replaces discontinued 5000/6000 series

ZY SDC retrofit lockset replaces SDC modifications of discontinued manufacturer models: Falcon-LM581; Sargent-7704/7705; Corbin-9557L/2257; Russwin- 7059L; Arrow-1600EW; Yale-8705; Almet-5007; Best-35HEW

HiTower® Mod - SDC supplied Schlage mortise lock and electric frame actuator, less lever trim

ZS Schlage L9080

HiTower® Mod - Distributors supply SDC with the mortise lock body and armored front (less trim) for modification. SDC returns the modified lock body with an electric actuator. Upon installation, two lever return spring cages (supplied by distributor) are required for proper operation.

Table with 6 columns: Code, Brand, Model, Code, Brand, Model. Includes entries for Falcon, Sargent, Corbin/Russwin, Arrow, Best, Marks, Yale, and Dorma.

*All Falcon locks must be supplied with 0201000-000 face plate, less hub locking bar

SPECIFY FUNCTION

- 7530 Locked both sides. Unlocked by access control, remote control and key from either side, failsafe
7550 Locked outside only. Unlocked by access control, remote control, outside key and inside lever, failsafe
7560 Locked both sides. Unlocked by access control, remote control and key from either side, failsecure
7570 Locked outside only. Unlocked by access control, remote control, outside key and inside lever, failsecure

SPECIFY HAND

- L Left hand LR Left hand reversed
R Right hand RR Right hand reversed

ACTUATOR VOLTAGE AND FRAME SIZE

Table with 6 columns: Code, Voltage, Amps, Code, Voltage, Amps, Code, Voltage, Amps. Categorized by actuator type: Failsafe, Extra Narrow failsafe, and Failsecure.

+ Fail Secure Actuator Available with Z or S lockset only. Special strike preparation required for S7560/7570.

SPECIFY FINISH

Table with 6 columns: Code, Finish, Price, Code, Finish, Price, Code, Finish, Price. Lists finishes like Dull Chrome, Bright Brass, Dull Bronze, Oil Rubbed Bronze, Bright Chrome, Bright Stainless Steel, and Dull Stainless Steel.

SPECIFY LEVER TRIM FOR Z, ZR & ZY

Table with 4 columns: Code, Description, Code, Price. Lists lever trim options like Galaxy with rose, Eclipse with rose, Nova with rose, Schlage style with SDC B rose, and Galaxy with escutcheon.

6 - Electrified Mortise Locksets



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012

HiTower® PRO Sources **Z, ZR, ZY**: SDC supplied - SDC lever trim, mortise lock and electric frame actuator. Schlage style lever trim 07 and 12 POA, consult factory for minimum qty.

SOURCE/FUNCTION

Z7530	SDC	Failsafe, locked both sides with rose trim	705.00
Z7550	SDC	Failsafe, locked outside only with rose trim	695.00
Z7560	SDC	Failsecure, locked Both sides with rose trim	855.00
Z7570	SDC	Failsecure, locked outside only with rose trim	845.00
ZY7530	SDC	(Replaces discontinued lock models, see 6.20 for details) Failsafe, locked both sides with rose trim	705.00
ZY7550	SDC	(Replaces discontinued lock models, see 6.20 for details) Failsafe, locked outside only with rose trim	695.00
ZR7530	SDC	(Replaces 5000 series) Failsafe, locked both sides with rose trim	805.00
ZR7550	SDC	(Replaces 5000 series) Failsafe, locked outside only with rose trim	795.00
ZR7560	SDC	(Replaces 6000 series) Failsecure, locked both sides with rose trim	855.00
ZR7570	SDC	(Replaces 6000 series) Failsecure, locked outside only with rose trim	845.00

Extra Narrow Failsafe Frame Actuator **Add 120.00**

(Actuator type D, E, F, only page 6.20) For 1-1/4" to 1-1/2" frames. Special strike prep required. Not available with ZR or failsecure 7560 and 7570

Rose Trim **N/C**

Escutcheon trim **Add 100.00**

HiTower® MOD Source **ZS** (see 6.20) **Special order, no returns, no cancellation**
SDC supplied - Schlage L mortise lock and electric frame actuator, **less lever trim**

SOURCE/FUNCTION

ZS7530	Schlage	Failsafe, locked both sides	POA
ZS7550	Schlage	Failsafe, locked outside only	POA

HiTower® MOD Sources **A, D, I, N, O, P, S, T** (see 6.20)
Distributor supplied - Major brand mechanical lock for modification, SDC supplied Electric frame actuator

SOURCE/FUNCTION

A, D, I, N, O, P, S, T, U, V 7530	Failsafe, locked both sides	480.00
A, D, I, N, O, P, S, T, U, V 7550	Failsafe, locked outside only	445.00
S7560	Failsecure, locked both sides (5.75" Strike plate)	625.00
S7570	Failsecure, locked outside only (5.75" Strike plate)	615.00

Extra Narrow Failsafe Frame Actuator **120.00**

(Actuator type D, E, F only page 6.20) For 1-1/4" to 1-1/2" frames. Special strike prep required. Not available with failsecure 7560 and 7570

HiTower® MOD Source **R** (see 6.20) Distributor supplied - Schlage L9080 mechanical lock for modification. SDC supplied - Electric frame actuator

SOURCE/FUNCTION

R7530	(Replaces 5000 series) Failsafe, locked both sides	530.00
R7550	(Replaces 5000 series) Failsafe, locked outside only	500.00

Finish **Add to List**

Q	Dull chrome	N/C
All other finishes (see page 6.20)		Add 50.00

OPTIONS AND ACCESSORIES **Add to List**

Schlage style lever trim 07, 12. Minimum quantity required, consult factory. **POA**

Lock status and wire harness

L	Latch status switch, SPDT, 5 Amps @ 30VDC	60.00
S	Latch and deadlock status, 3 Amps @ 30VDC	100.00
SC-10	Socket connectors with 10 ft. cable, power wiring only	60.00
SC-10-5	Socket connectors with 10 ft. cable for power and options	60.00

Special Strikes

WSP	1-1/4" x 9-1/2" wood strike	60.00
SSP	Special retrofit strike plate	POA

Specify extended lip strike in writing for the following

Std. 1-3/4" actuator with 1-3/8" - 1-1/2" extended lip	30.00
Std. 1-3/4" actuator with 1-3/4" - 2" extended lip	30.00
Narrow 1-1/4" actuator with 1-3/8" - 1-1/2" extended lip	30.00
Narrow 1-1/4" actuator with 1-3/4" - 2" extended lip	30.00

Electrical back boxes for frame actuators with conduit knockouts:
(Recommended for new construction)

7500EB-S	For standard actuator in 1-3/4" or 2" face frame	30.00
7500EB-N	For narrow actuator in 1-1/4" or 1-1/2" face frame	30.00

Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com



6 - Electrified Mortise Locksets



SK-L90 Field Electrification Kit for Schlage L9000



LIST



SK-L90	Field Electrification Kit for Schlage L9000 Series	120.00
SK-L90-SC	Field Electrification Kit for Schlage L9080 (includes Springcage)	136.00
S7800-REX	Request-To-Exit kit for Schlage L9000 Series	120.00



SK-88 Field Electrification Kit for Yale 8805



LIST

SK-88	Field Electrification Kit for Yale 8805		120.00
LM-88	Field Latch Kit for Yale 8805		100.00



SK-82 Field Electrification Kit for Sargent 8206



LIST

SK-82	Field Electrification Kit for Sargent 8206		120.00
LM-82	Field Latch Kit for Sargent 8206		100.00



PTH SERIES POWER TRANSFER HINGE

Distributor Discount Code **LZK**

LIST



PTH x 5 Ft Cable

see page 21.80 for ordering information



F 10B Listed for 3hr Fire Rated Door



PTM HEAVY DUTY SERIES ELECTRIC POWER TRANSFER DEVICE

Distributor Discount Code **LZK**

LIST



see page 21.81 for ordering information



10B Listed For 3 Hrs Fire Rated Doors



HIGH IN-RUSH CONCEALED POWER TRANSFER DEVICE, UL LISTED

Distributor Discount Code **LZK**

LIST



see page 21.81 for ordering information



10B Listed For 3 Hrs Fire Rated Doors



DOOR CORE DRILL GUIDE

Distributor Discount Code **LZK**

LIST





The SDC 7000-DG Laser Guided Wire Raceway Drill Fixture enables wire raceway preparation through particle filled and solid wood doors. The door core wire raceway permits the installation and wiring of electrified locksets, exit devices and electric hinges.

The Laser Guided Wire Raceway Drill Fixture is easy to use without previous experience. The kit allows for drilling from the hinge side without removing the door from the frame.

The **7000-DGK** Kit includes: **Laser Guided Door Core, Raceway Fixture, 1/4" x 6" Pilot Drill Bit, 3/8" x 50" Door Raceway Drill Bit** (Custom designed evacuator drill bit tool sharpened with 1' extra long flutes), **Fiberglass Wire Running Kit** (Flexible acrylic end connection, Brass hook end for pulling, Brass eye end for pushing), **Door Wedge, Kit Carry Case**

7000-DGK	Laser door core drill guide Kit	500.00
7000-DB3/8	3/8" x 50" evacuator drill bit	75.00
7000-PD	1/4" x 6" pilot drill bit	24.00

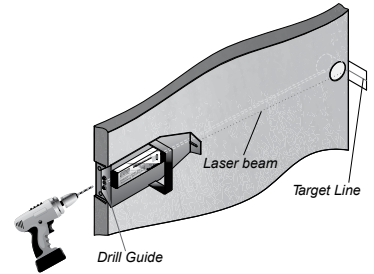

1/4 x 6" Pilot Drill Bit

3/8" x 50" Evacuator Drill Bit - Custom Designed for Door Raceways

Extra Long 1 Ft. Flute

Price List Effective October 1, 2012



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com



6 - Electrified Mortise Locksets



SDC Factory Installed Kits are UL Listed and Field Retrofit Kits are UL Classified for use with 3Hr fire rated and non-fire rated mechanical exit devices. Only 700mA inrush / 200mA continuous @ 24VDC provides simultaneous latch retraction, dogging with pushpad depression
 ◇ unless specified otherwise.

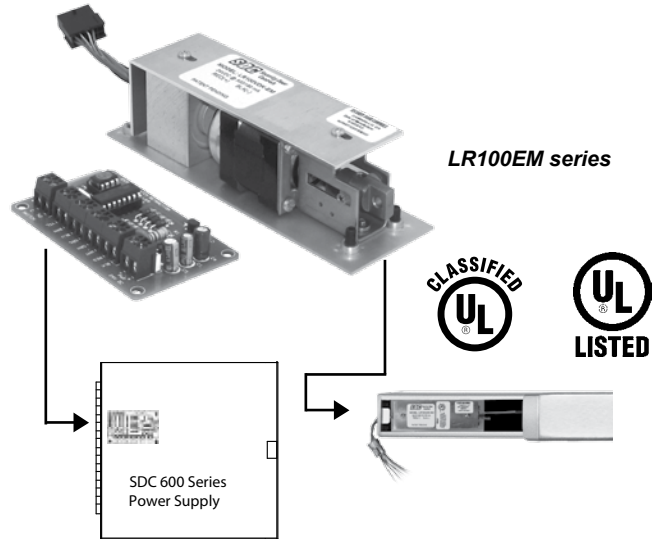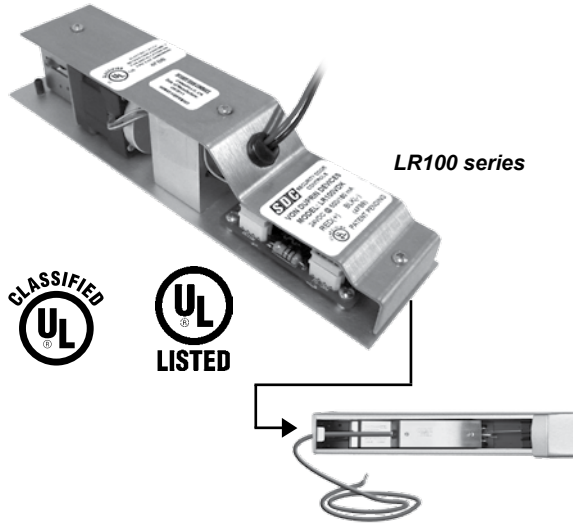

SPECIFY BRAND MODEL

SDC 6000 Series Exit Devices
 Electric Latch Retraction / Dogging Device

Length	Field Retrofit Kit	LIST	Factory Installed	LIST
36"-48"	LR100SDCK	550.00	LR100SDC	600.00
30"	LR100SDCKEM	600.00	LR100SDCEM	650.00

Options: Retrofit Monitoring Kits, SPDT

LRSDC1L	Latch Status Kit	100.00
LRSDC1R	Pushpad/Dogging Status or REX Status Kit	100.00

Models

Standard Line		Narrow Line
S6100	Rim Mount	N6100
S6200	Surface Vertical Rod	N6200
S6300	Mortise	
S6800	Concealed Vertical Rod	N6800

Cal-Royal 9800 Rim Mount Exit Device
 Electric Latch Retraction / Dogging Device

Length	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100CAK	550.00	LR100CA	600.00

Models

9800	Rim Mount
9860	Surface Vertical Rod

SPECIFY BRAND MODEL LIST

Adams Rite Exit Device
 Electric Latch Retraction / Dogging Device

Length	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100ARK	550.00	LR100AR	600.00

Models

Standard Line		Narrow Line	Fire Rated
8700	Rim Mount	8800	3700
8100	Surface Vertical Rod	8200	3100
	Concealed Vertical Rod	8600	3600

* Note: Retracts only the latch

Arrow 1000 Series Exit Devices
 Electric Latch Retraction / Dogging Device

Length	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100AWK	550.00	LR100AW	600.00
42"	LR100AWK42	600.00	LR100AW42	650.00
48"	LR100AWK48	600.00	LR100AW48	650.00

Models

S1250	Rim Mount
-------	-----------

7 - Electric Latch Retraction Kit



SPECIFY BRAND MODEL LIST

Corbin Russwin ED Series Exit Devices

Electric Latch Retraction / Dogging Device

Length	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100CRK	550.00	LR100CR	600.00
42" - 48"	LR100CRK-42/48	600.00	LR100CR-42/48	650.00

Options: Retrofit Monitoring Kits, SPDT

	LRCR1L	Latch Status Kit	100.00
	LRCR1R	Pushpad/Dogging Status or REX Status Kit	100.00

* Note: Retracts only the latch

Models

ED5200	Rim Mount
ED4200	Narrow Rim Mount
ED5400	Surface Vertical Rod
ED5800	Concealed Vertical Rod

Detex Exit Device

Electric Latch Retraction / Dogging Device

Length	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100DXK	550.00	LR100DX	600.00

Models

Standard Line		Narrow Line
10 Series	Rim Mount	40 Series
20 Series	Surface Vertical Rod	50 Series
80 Series	Concealed Vertical Rod	60 Series

Dorma Exit Devices

Electric Latch Retraction / Dogging Device

Length	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100DAK	550.00	LR100DA	600.00

Models

9300	Rim Mount
9400	Surface Vertical Rod

Falcon Dor-O-Matic Exit Devices

Electric Latch Retraction / Dogging Device

Length	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100DMK	550.00	LR100DM	600.00

Models

1590	Rim Mount
1490	Concealed Vertical Rod

Falcon Dor-O-Matic Exit Devices

Electric Latch Retraction / Dogging Device

Length	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100FAK	550.00	LR100FA	600.00

Models

1790	Rim Mount
1690	Concealed Vertical Rod

SPECIFY BRAND MODEL LIST

Falcon 24/25 Series Exit Devices

Electric Latch Retraction / Dogging Device

Length	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100FRK	550.00	LR100FR	600.00

Models

Standard Line		Narrow Line
25-R / F-25-R	Rim Mount	24-R / F-24-R
25-V / F-25-V	Surface Vertical Rod	24-V / F-24-V
25-C / F-25-C	Concealed Vertical Rod	24-C / F-24-C

Hager 4500 Series Exit Devices

Electric Latch Retraction / Dogging Device

Length	Field Retrofit Kit	LIST	Factory Installed	LIST
36"-48"	LR100HK	550.00	LR100H	600.00
30"	LR100HEM	600.00	LR100HEM	650.00

Options: Retrofit Monitoring Kits, SPDT

	LRH1L	Latch Status Kit	100.00
	LRH1R	Pushpad/Dogging Status or REX Status Kit	100.00

Models

4501 - Rim	Rim Mount
4501 - SVR	Surface Vertical Rod

IDC (International Door Closers)

8000 Series Exit Devices

Electric Latch Retraction / Dogging Device

Length	Field Retrofit Kit	LIST	Factory Installed	LIST
36"-48"	LR100IDCK	550.00	LR100IDC	600.00
30"	LR100IDCKEM	600.00	LR100IDCEM	650.00

Options: Retrofit Monitoring Kits, SPDT

	LRIDC1L	Latch Status Kit	100.00
	LRIDC1R	Pushpad/Dogging Status or REX Status Kit	100.00

Models

Standard Line		Narrow Line
8610/8810	Rim Mount	8510/8710
8630/8830	Surface Vertical Rod	8530/8730
8620/8820	Mortise	
8650/8850	Concealed Vertical Rod	8550/8750

Jackson Exit Devices

Electric Latch Retraction / Dogging Device

Length	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100JKK	550.00	LR100JK	600.00

Models

2095 / 1295	Rim Mount
2085 / 1285	Concealed Vertical Rod

Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com



RELEASE PENDING

RELEASE PENDING

7 - Electric Latch Retraction Kit

continued on next page

SPECIFY BRAND MODEL LIST

K2 QED Series Exit Devices

Electric Latch Retraction / Dogging Device

Length	Field Retrofit Kit	LIST	Factory Installed	LIST
36"-48"	LR100K2K	550.00	LR100K2	600.00
30"	LR100K2KEM	600.00	LR100K2EM	650.00

Options: Retrofit Monitoring Kits, SPDT

	LRK2R	Latch Status and REX Status or Pushpad/Dogging Status Kit	100.00
--	-------	---	--------

Models

QED111	Rim Mount
QED114	Surface Vertical Rod
QED124	Concealed Vertical Rod

Kawneer Exit Devices

Electric Latch Retraction / Dogging Device

Length	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100KWK	550.00	LR100KW	600.00

Models

1786	Rim Mount
1686	Concealed Vertical Rod

Marshall Best Security Exit Devices

Electric Latch Retraction / Dogging Device

Length	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100MBSK	550.00	LR100MBS	600.00

Models

Q1100/QF1100	Rim Mount
--------------	-----------

PHI (Precision Hardware) Exit Devices

Electric Latch Retraction / Dogging Device (Less Bottom Rod)

Length	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100PDK	550.00	LR100PD	600.00

Options: Retrofit Monitoring Kits, SPDT

	LRP1L	Latch Status Kit for PHI Rim 2000 Series	100.00
	LRP2L	Latch Status Kit for PHI Vertical 2000 Series	100.00
	LRP1R	REX Status or Pushpad/Dogging Status for PHI 2000 Series	100.00

Models

2101	Rim Mount
2201	Surface Vertical Rod
2801	Concealed Vertical Rod
5100	Rim Mount
5200	Surface Vertical Rod

SPECIFY BRAND MODEL LIST

PDQ Exit Devices

Electric Latch Retraction / Dogging Device

Length	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100PDQK	550.00	LR100PDQ	600.00

Models

6200R	Rim Mount
6200V	Surface Vertical Rod

Sargent Exit Devices

Electric Latch Retraction / Dogging Device

Length	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100SGK	550.00	LR100SG	600.00

Models

8800	Rim Mount
8700	Surface Vertical Rod
8600	Concealed Vertical Rod

* Note: Retracts only the latch

TownSteel ED1100 Series Exit Devices

Electric Latch Retraction / Dogging Device

Length	Field Retrofit Kit	LIST	Factory Installed	LIST
36"-48"	LR100TSK	550.00	LR100TS	600.00
30"	LR100TSKEM	600.00	LR100TSEM	650.00

Models

ED1100	Rim Mount
--------	-----------

Yale 7000 Series Exit Devices

Electric Latch Retraction / Dogging Device

Length	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100YDK	550.00	LR100YD	600.00
42" - 48"	LR100YDK-42/48	600.00	LR100YD-42/48	650.00

Options: Retrofit Monitoring Kits, SPDT

	LRY1L	Latch Status Kit	100.00
	LRY1R	Pushpad/Dogging Status or REX Status Kit	100.00

* Note: Retracts only the latch

Models

Standard Line		Narrow Line
7100	Rim Mount	7200
7100-2	Rim Mount	
7110	Surface Vertical Rod	7210
7120	Concealed Vertical Rod	



SECURITY DOOR CONTROLS
 801 Avenida Acaso • Camarillo, CA 93012
 Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012

SPECIFY BRAND MODEL

LIST

Von Duprin 98/99 and 33/35 Series Exit Devices**Electric Latch Retraction / Dogging Device**

Length	Field Retrofit Kit	LIST	Factory Installed	LIST
36"-48"	LR100VDK	550.00	LR100VD	600.00
30"	LR100VDKEM	600.00	LR100VDEM	650.00

Models

98/99	Rim Mount
9827/9927	Surface Vertical Rod
9847/9947	Concealed Vertical Rod
9875/9975	Mortise
9857/9957	Three Point latching
9875/9975	Mortise
9857/9957	Three Point Latching

Note: Please check our website regularly for new releases in this product line

SPECIFY BRAND MODEL

LIST

Von Duprin 22 Series Exit Devices**Electric Latch Retraction / Dogging Device**

Length	Field Retrofit Kit	LIST	Factory Installed	LIST
36"-48"	LR100VDK22	550.00	LR100VD22	600.00
30"	LR100VDKEM22	600.00	LR100VDEM22	650.00

Models

22	Rim Mount
2227	Surface Vertical Rod

Options: Retrofit Monitoring Kits, SPDT for Von Duprin 98/99, 33/35 and 22 Series

LRVD1L	Latch Status Kit for Von Duprin 98/99 and 22 Series	100.00
LRVD2L	Latch Status Kit for Von Duprin 33/35 Series	100.00
LRVD1R	REX Status or Pushpad/Dogging Status for Von Duprin 98/99 and 33/35 Series	100.00
LRVD2R	REX Status or Pushpad/Dogging Status for Von Duprin 22 Series	100.00

ACCESSORIES**List**

602RF	1 Amp Power Supply, UL Listed 294, for 1 or 2 exit devices	300.00
632RF	2 Amp Power Supply, UL Listed 294 for 3 or 4 exit devices	400.00
EMC	2 Station Automatic Door Sequence; Each EMC provides interface and sequencing for two single or one double automatic door.	150.00
PTH-4Q	4-wire Electric Hinge, 1 Amp max. UL 10B	150.00
PTH-4QDPS	4-wire, Electric Hinge 1 Amp max. UL 10B. With concealed Door Status Contact	200.00
PTH-2+4Q	6-wire Electric Hinge 1-pair 16 Amp inrush, 4 Amp continuous; 2-pair 1 Amp @ 12/24V	175.00
PTH-10Q	Ten (10) Conductor Power Transfer Hinge, 1 Amp @ 12/24V per pair	195.00
PT-5	Concealed mortise power transfer device, UL 10B Fire Door Accessory	60.00
PT-3V	Stainless steel door loop with surface wire junction	45.00
PTM-2AL	Two (2) Conductor Power Transfer Device: Two (2) 18 Ga. wires 5 Amp @ 12/24V AC/DC, Aluminum Powder Coat, US28 equivalent	358.00
PTM-2BZ	Two (2) Conductor Power Transfer Device: Two (2) 18 Ga. wires 5 Amp @ 12/24V AC/DC, Dark Brown Powder Coat, US10B equivalent	358.00
PTM-10AL	Ten (10) Conductor Power Transfer Device: Ten (10) 24 Ga. wire 1 Amp @ 12/24V AC/DC, Aluminum Powder Coat, US28 equivalent	358.00
PTM-10BZ	Ten (10) Conductor Power Transfer Device: Ten (10) 24 Ga. wire 1 Amp @ 12/24V AC/DC, Dark Brown Powder Coat, US10B equivalent	358.00
400U-L2	Two LEDs. Specify lens color. Standard Finish, on 1 Gang plate	45.00
400NU-L2	Two LEDs. Specify lens color. Standard Finish, on narrow plate	45.00

**602RF**

see page 16.63

**PTH-4Q**

see page 21.80

**PTM**

see page 21.81

**400NU-L2**

see page 20.78



SPECTRA™ S6000 TOUCH BAR EXIT DEVICES


Distributor Discount Code **XK**

Panic & Fire Rated Exit Devices ANSI / BHMA Grade 1

SDC S6000 Spectra™ series panic and fire rated exit devices are available in rim mount, mortise and surface vertical rod configurations. Spectra Class mechanical exit devices are UL listed and ANSI A156.3 Grade 1 compliant and comply with all national and state building and fire life safety codes.




- ANSI/BHMA A156.3-2001 Grade 1 Compliant
- Meets/Exceeds ADA requirements
- CA Title 19 Compliant
- UBC 97, Standard 7.2

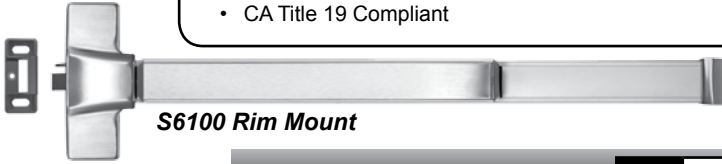

S6100 Rim Mount

SPECTRA SERIES EXIT DEVICE				LIST
S61	Rim mount exit device			600.00
S62	Surface vertical			900.00
S63	Mortise [03 Lever Trim included] - specify:	EE	Eclipse Escutcheon	1100.00
		GE	Galaxy Escutcheon	1100.00

SPECIFY FUNCTION			
01	Exit Only, No Trim		N/C
02	Dummy Pull or Lever (opens when dogged)		N/C
03	Entrance by trim when latch is released by key		N/C
08	Lever with key locks/unlocks lever		N/C
14	Lever trim always active		N/C

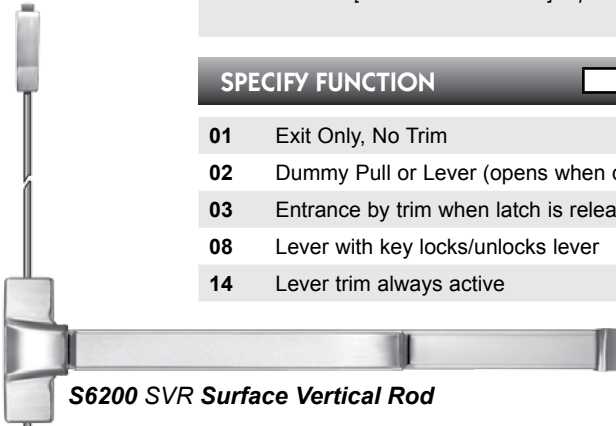

S6200 SVR Surface Vertical Rod

SPECIFY PANIC OR FIRE RATED			Add to List
P	Panic exit device Mechanical Dogging STD; See part # CD for optional key cylinder dogging 2.9		N/C
F	Fire exit device Mechanical dogging not available		110.00

SPECIFY HAND			
RR	Right hand reverse bevel, RHRB	LR	Left hand reverse bevel, LHRB
			N/C

SPECIFY FINISH			Add to List
U	630 Dull Stainless Steel		N/C



S6300 Mortise

SPECIFY LENGTH				Add to List
36	For 36" Door	42	For 42" Door	20.00
		48	For 48" Door	40.00

SPECIFY TRIM (S63 Mortise Only)			
EE	Eclipse Escutcheon	GE	Galaxy Escutcheon
			N/C

SPECIFY OPTIONS				Add to List
-----------------	--	--	--	-------------

R	Request-To-Exit Output, SPDT	80.00	L	Latch Status Output, SPDT	80.00
----------	------------------------------	--------------	----------	---------------------------	--------------

For 62 Series devices only:

LBR	Less Bottom Rod, for Panic Devices	N/C	LBRF	Less Bottom Rod, for Fire Rated devices	N/C
------------	------------------------------------	------------	-------------	---	------------



S6200-LBR SVR

DEVICE TRIM

Distributor Discount Code **XK**

Standard Active and Dummy Trim



EK Eclipse

SPECIFY TRIM Rim and Vertical Rod Add to List

<i>Standard Trim</i>			
EK Eclipse	GK Galaxy		225.00
SP Saturn			100.00



GK Galaxy

SPECIFY TRIM FUNCTION Add to List

Exit Only	CP01	N/C
Dummy Trim	EK02, GK02, SP02	N/C
Key Retracts Latchbolt	EK03, GK03, SP03	N/C
Key Locks/Unlocks Lever	EK08, GK08	N/C
	SP08	80.00
No Cylinder Lever Always Active	EK14, GK14	N/C
	SP14	75.00



SP Saturn

SPECIFY TRIM FINISH Add to List

U 630 Dull Stainless Steel		N/C
C 605 Bright Brass	D 606 Dull Brass	G 612 Dull Bronze
	P 625 Bright Chrome	Q 626 Dull Chrome
		50.00
		50.00

OPTIONS Add to List

- Rim cylinder required for 03 functions
- Mortise cylinder required for 08 functions and GKE03, EKE03.
- 1 key cylinder required for CD option

CD	Keyed dogging (Specify key cylinder separately) (not available with (F) fire exit device)	20.00
CYL-6KDQ	6 pin, 1.125" mortise cylinder, keyed different, dull chrome	30.00
CYL-6KAQ	6 pin, 1.125" mortise cylinder, keyed alike, dull chrome	30.00
RIM-CYL-03U	Rim Cylinder, keyed different	50.00



EKE Eclipse

ELECTRIC TRIM OPTIONS FOR SDC 6000 SERIES Add to List

- Features**
- Failsecure, field reversible to failsafe
 - 4 ft cable and connectors
 - 600/300 mA @ 12/24VDC

EKE03	Eclipse style electric trim less mortise cylinder, Stainless Steel Finish	675.00
GKE03	Galaxy style electric trim less mortise cylinder, Stainless Steel Finish	675.00

Electric Trim Options

LS	Locked/unlocked status, SPDT 3 Amp contact	80.00
-----------	--	--------------



GKE Galaxy

OPTIMAL DOOR STRIKES

List



ST2DF 48.00

Optional for pairs of doors with rim mount device.

Projection: 1-15/16" (49mm)



ST1MP For 6100P



ST1MF For 6100F

Projection: 7/8" (22.5mm)

68.00

Optional for mullion application

REMOVABLE MULLION

List



KR90F 650.00

Standard Key Removable Mullion
For Panic Exit and Fire Exit Rim Mount Devices.
Length: 8ft
Material: 2" 11 Gauge Steel Tube
Finish: Primer gray

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com
Price List Effective October 1, 2012



8 - Exit Devices

Momentary or maintained latch bolt and push pad retraction, with simultaneous dogging.
Automatic re-triggering of latch retraction
Voltage: 24VDC @ 700 mA activation, 200 mA continuous



Rim Mount



Mortise



Vertical Rod



EE




GE



E



EM



SDC 600 Series Power Supply



PTM Series



PTH x 5 Ft Cable

602RF (shown)



600 Series Power Supply

8.30

SPECIFY DEVICE **LIST**

S61	Rim mount exit device	600.00
S62	Surface vertical	900.00
S63	Mortise [03 Lever Trim included] - specify: EE/GE Eclipse Escutcheon/Galaxy Escutcheon	1100.00

SPECIFY FUNCTION **Add to List**

01	Exit	02	Dummy	03	Nightlatch	N/C
-----------	------	-----------	-------	-----------	------------	------------

SPECIFY PANIC OR FIRE RATED

P	Panic	N/C	F	Fire	110.00
----------	-------	------------	----------	------	---------------

SPECIFY HAND (Mortise Only)

RR	Right hand reverse bevel, RHRB	LR	Left hand reverse bevel, LHRB	N/C
-----------	--------------------------------	-----------	-------------------------------	------------

SPECIFY FINISH

U	630 Dull Stainless Steel	N/C	Special Finishes	P.O.A.
----------	--------------------------	------------	------------------	---------------

SPECIFY LENGTH

36	For 36" Door	N/C	42	For 42" Door	20.00	48	For 48" Door	40.00
-----------	--------------	------------	-----------	--------------	--------------	-----------	--------------	--------------

SPECIFY TRIM (Mortise Only)

EE	Eclipse Escutcheon	GE	Galaxy Escutcheon	N/C
-----------	--------------------	-----------	-------------------	------------

SPECIFY ELECTRIC LATCH RETRACTION

E	Dual Electric Latch Retraction and Dogging	700.00
EM	External Module Dual Electric Latch Retraction/Dogging	750.00

SPECIFY POWER TRANSFER (For the entire line of Power Transfer, see pages 21.80 and 21.81)

PTM-2AL	Two (2) Conductor Power Transfer Device: Two (2) 18 Ga. wires 5 Amp @ 12/24V AC/DV, Aluminum Powder Coat, US28 equivalent	358.00
PTM-10AL	Ten (10) Conductor Power Transfer Device: Ten (10) 24 Ga. wire 1 Amp @ 12/24V AC/DC, Aluminum Powder Coat, US28 equivalent	358.00
PTH-4Q	Four (4) Conductor Power Transfer Hinge 1 Amp @ 12/24V per pair, 4.5" x 4.5" standard weight, 626 Dull Chrome	150.00
PTH-10Q	Ten (10) Conductor Power Transfer Hinge 1 Amp @ 12/24V per pair, 4.5" x 4.5" standard weight, 626 Dull Chrome	195.00

SPECIFY POWER SUPPLY (For the entire line of Power Supplies, see page 16.63)

602RF	1 Amp, class 2 output, 12" W x 12" H x 3.75" D box	260.00
631RF	1.5 Amp, class 2 output, 12" W x 12" H x 3.75" D box	350.00
EMC	Sequencer Module (For other Modules and pairs of doors see page 16.64)	150.00



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012



SECURITY DOOR CONTROLS


801 Avenida Acaso • Camarillo, CA 93012

Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012

ELECTRIFIED MORTISE EXIT DEVICES

Add to List

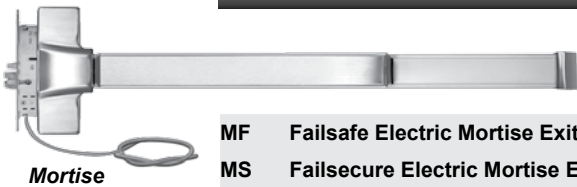


Mortise



MF	Fail-safe Electric Mortise Exit Device	200.00
MS	Fail-secure Electric Mortise Exit Device	200.00

Field reversible fail-secure/ fail-safe, unlocks by access control, power loss or signal from fire command center. Door stays latched even when unlocked. Complies with national building and fire codes

Voltage: 600/300 mA @ 12/24VDC

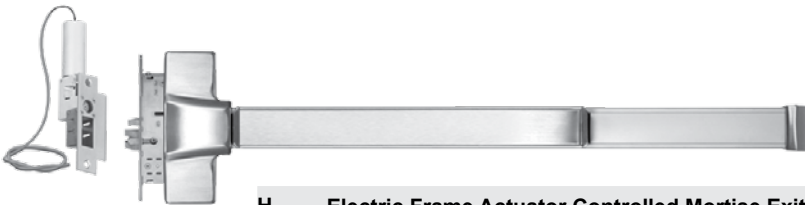

H	Electric Frame Actuator Controlled Mortise Exit Device	See page 8.35 for price
----------	---	--------------------------------

See page 8.35 for ordering details. Specify with Fire rated exit device. Features include 24VDC/24VAC/115VAC, fail-safe operation and unlocks by access control, power loss or signal from fire command center. Door stays latched even when unlocked. All wiring is maintained in the strike jamb. Complies with national building and fire codes

ELECTRIC DOGGING

Add to List



G	Electric Dogging	450.00
----------	-------------------------	---------------

Voltage: 170/100 mA @ 12/24VDC

Options

KS	Built-in key switch	80.00
L1	Dogged Status Indicator, less cylinder, green = dogged (unlocked)	36.00



ELECTRIC TRIM OPTIONS FOR SDC 6000 SERIES

Add to List

Features

- Fail-secure, field reversible to fail-safe
- Audible tone
- 4 ft cable and connectors
- 600/300 mA @ 12/24VDC

EKE03	Eclipse style electric trim less mortise cylinder	675.00
GKE03	Galaxy style electric trim less mortise cylinder	675.00

Electric Trim Options

LT	Tricolor LED Indicator	80.00
LS	Locked/unlocked status, SPDT 3 Amp contact	80.00



EKE Eclipse
Optional LED
shown



GKE Galaxy
Optional LED
shown

EXIT ALARM KIT

Add to List



- A** Exit Alarm, 9V Battery Powered 400.00
- B** Exit Alarm with 12/24V AC/DC input (9V battery provides power backup) 440.00

Features

- LED (field selectable Active or Off)
- Bypass - No LED
- Armed - Blinks every 4 seconds (Green when armed, Red when in alarm mode)
- Low Battery Alert – Siren will beep every 45 seconds.
- 15 or 60 second arming delay
- Remote status output
- Field selectable alarm modes include:
 - › Continuous alarm with manual key reset
 - › Alarm automatically rearms 2 minutes after door closes and may be retriggered. May be manually rearmed by key before automatically rearmed.



Option A & B Exit Alarm
Rim Mount
Vertical Rod
Mortise

Optional

- AR6** 6 or 10 minute alarm with auto rearm and manual key reset. **AR20** 20 minute alarm with auto rearm and manual key reset
- AD1** 1 second arming delay

DELAYED EGRESS

Add to List



DE, KDE
Rim Mount
Vertical Rod
Mortise

See page 14.57 for features

- DE** Electrification of master exit device and wall mount controller with keypad control and reset 1250.00
- KDE** Electrification of master exit device and wall mount controller with both keypad and key switch control and reset, less cylinder 1350.00
- DES** For pair of doors, additional exit device equipped with delayed egress mechanism, less controller. **Must be ordered together with DE and device.** 500.00

Options

- DEC-J** 3 Gang Interior surface mount box for 101-DEC 90.00
- SHD-J** Shroud for surface mount box DEC-J outdoor use 60.00

Operations

- NA** IBC, IFC, NFPA compliant, Field Selectable 15 to 30 second Exit Delay, 1 or 2 Nuisance Delay
- NC** IBC, IFC, NFPA 101, NFPA 1-UFC, UBC, SBC compliant, Fixed 15 second Exit Delay, 0/1 Nuisance Delay, Calif. Building Code OSHPD/Manual Power Up N/C
- ND** IBC, IFC, NFPA 101, NFPA 1-UFC, UBC, SBC compliant, Fixed 15 second Exit Delay, 0/1 Nuisance Delay N/C
- BC** BOCA National Building Code/City of Chicago Compliant, Fixed 15 second Exit Delay, 0 Nuisance Delay, Auto Reset 30 seconds N/C
- BD** BOCA National Building Code, Fixed 15 second Exit Delay, 0/1 Nuisance Delay, Auto Reset 30 seconds N/C



101-DE with SHD-J



DEC-J



SHD-J End View

Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com





SECURITY DOOR CONTROLS

801 Avenida Acaso • Camarillo, CA 93012

Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective October 1, 2012



Electric Frame Actuator Controlled Exit Device

Features

- Fire rated exit device
- Failsafe, unlocks by access control, power loss or signal from fire command center
- For use with fire rated exit and stairwell doors
- Door stays latched even when unlocked
- All wiring maintained in the strike jamb
- Complies with all national codes
- No power transfer hinge



Price List Effective October 1, 2012

See SDC power supplies with fire command interface for emergency release of exit device



NE03 Nova



EE03 Eclipse



GE03 Galaxy



G03 Galaxy



E03 Eclipse



N03 Nova

SPECTRA SERIES EXIT DEVICE LIST

S6303FH	Fire rated mortise exit device with electric frame actuator, key retracts latch	1855.00
----------------	---	----------------

ACTUATOR VOLTAGE AND FRAME SIZE Add to List

Failsafe actuator for 1-3/4" to 2" face frames		Narrow failsafe actuator for 1-1/4" to 1-1/2" face frames	
A	115VAC 0.2 Amp N/C	D	115VAC 0.2 Amp 120.00
B	24VAC 0.5 Amp N/C	E	24VAC 0.5 Amp 120.00
C	24VDC 0.5 Amp N/C	F	24VDC 0.5 Amp 120.00

SPECIFY HAND

RR	Right hand reverse bevel, RHRB	LR	Left hand reverse bevel, LHRB	N/C
-----------	--------------------------------	-----------	-------------------------------	------------

SPECIFY LENGTH Add to List

36	For 36" Door (std)	N/C		
42	For 42" Door	40.00	48	For 48" Door 80.00

SPECIFY HEAD COVER & PUSH PAD FINISH Add to List

Push bar base finish anodized aluminum

U	630 Dull Stainless Steel (std)	N/C				
Plated Finishes						
C	605 Bright Brass	D	606 Dull Brass	G	612 Dull Bronze	100.00
H	613 Oil Rubbed Bronze	P	625 Bright Chrome	Q	626 Dull Chrome	100.00

OPTIONAL STATUS OUTPUTS Add to List

L	Latch position status output, SPDT, 3 Amp	60.00
S	Latch & deadlocked status output, SPDT, 3 Amp	100.00
SC10	Socket connectors with 10ft. cable, power wiring only	60.00
SC10-5	Socket connectors with 10ft. cable for power and options	60.00

SPECIFY TRIM

EE03	Eclipse x Escutcheon	GE03	Galaxy x Escutcheon	NE03	Nova x Escutcheon	N/C
E03	Eclipse	G03	Galaxy	N03	Nova	N/C

SPECIFY TRIM FINISH Add to List

U 630 Dull Stainless Steel (std) **N/C**

Plated Finishes

C	605 Bright Brass	D	606 Dull Brass	G	612 Dull Bronze	50.00
H	613 Oil Rubbed Bronze	P	625 Bright Chrome	Q	626 Dull Chrome	50.00

KEY CYLINDERS AND OPTIONAL HARDWARE Add to List

CYL-6KDQ	6 pin, 1.125" mortise cylinder, keyed different, dull chrome	30.00
CYL-6KAQ	6 pin, 1.125" mortise cylinder, keyed alike, dull chrome	30.00

8 - Exit Devices





15 Series Electric Strike

Distributor Discount Code **FK**

LIST



- For 5/8" latch or 3/4" latch with 1/8" gap
- Choice of failsafe or failsecure
- 4.875" (124mm) radius corner
- All stainless steel parts

- 630 Satin stainless steel face plate
- ANSI A156.31 compliant

Input: 200mA @ 12VDC, 150mA @ 24VDC

Dimensions: 1-1/4" W x 4-7/8" H x 1-1/2" D

MODEL

15-4F12U	Failsafe, 12VDC	85.00	15-4S12U	Failsecure, 12VDC	85.00
15-4F24U	Failsafe, 24VDC	85.00	15-4S24U	Failsecure, 24VDC	85.00
RMB	Buzzer 12/24V AC/DC operation	40.00	BR64XL	Rectifier for AC operation	25.00

Not recommended for wood application



25 Series Electric Strike

LIST



The SDC 25 Series electric strike is designed for use with locksets having 5/8" (15mm) throw latchbolt. The compact low profile design with an internally mounted solenoid and factory supplied mounting tabs enable quick and easy installation where jamb space is limited.

- For 1/2" latch or 5/8" latch with 1/8" door gap
- Latch bolt monitor standard
- Failsecure
- Field reversible for failsafe operation
- Compatible with 5/8" latchbolts
- All stainless steel parts

- 630 Stainless steel standard finish
- ANSI A156.31 compliant

Dual Voltage: 300/150 mA @ 12/24VDC

Latch Status: SPDT, 3 Amp @ 30VDC

Dimensions: 1-1/4" W x 4-7/8" H x 1-1/2" D

MODEL

25-4U	4.875" (124mm) Square corner			120.00
RMB	Buzzer 12/24V AC/DC operation	40.00	BR64XL	Rectifier for AC operation 25.00

Not recommended for wood application

No-Cut Electric Strike

LIST



Note: Please check our website regularly for new releases in this product line



SECURITY DOOR CONTROLS
 801 Avenida Acaso • Camarillo, CA 93012
 Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective October 1, 2012



45 Series Electric Strike



LIST



The SDC 45 Series electric strike is designed for use with locksets having up to 3/4" latchbolts. The compact low profile design with an internally mounted solenoid and mounting tabs enable quick and easy installation where jamb space is limited. **UL Listing pending**

- For 5/8" latch or 3/4" latch with 1/8" gap
- **Latch bolt monitor standard**
- **Keeper closed and deadlocked standard**
- Field selectable failsecure - failsafe
- Field selectable voltage, 12/24V AC/DC
- 1/4" Horizontal alignment adjustment
- Low profile, 1-3/16" deep
- Plug-in wire connectors
- Mounting tabs
- All stainless steel parts with durable die cast body for corrosion resistance
- Fewer moving parts for maximum life
- 630 stainless steel standard
- ANSI A156.31 compliant

Dual Voltage: 280/140mA @ 12/24V DC
170/85mA @ 12/24V AC

Latch Status: SPDT, Dry 3Amp @ 30V (standard)
Keeper Closed / deadlocked SPDT, Dry 3Amp @ 30V (standard)
Keeper Open Closed Status: SPDT, Dry 3Amp @ 30V




45-A

SPECIFY MODEL

LIST

MODEL

45-A	Included: One 4.875" square corner faceplate. <i>Stainless steel finish standard*</i> One 4.875" radius corner faceplate. <i>Aluminum finish standard*</i> One 7.9375" radius corner faceplate. <i>Aluminum finish standard*</i>	180.00
45-4S	4.875" x 1.25" (124x32mm) square corner faceplate. <i>Stainless steel finish standard*</i>	152.00
45-4R	4.875" x 1.25" (124x32mm) radius corner faceplate. <i>Aluminum finish standard*</i>	156.00
45-6R	6.875" x 1.25" (175x32mm) radius corner faceplate. <i>Aluminum finish standard*</i>	160.00
45-7R	7.937" x 1.438" (202x36.5mm) radius corner faceplate. <i>Aluminum finish standard*</i>	165.00



45-4S

45-4R

SPECIFY FINISH

Add to List

*Square Corner Stainless Steel Finish N/C

*Radius Corner Faceplates Aluminum Finish N/C

Special Finish

U 630 Dull Stainless Steel	V 628 Dull Aluminum (std)	N/C
H 613 Oil Rubbed Bronze	D 606 Dull brass	Y 335 Black Anodized
45-A Special Finish		75.00



45-6R

45-7R

OPTIONS


Add to List

K Keeper open/closed status	40.00	RMB Buzzer 12/24V AC/DC operation	40.00
------------------------------------	--------------	--	--------------

SPECIFY LIP EXTENSION KIT

Add to List

LE451 1" Lip Extension Kit	30.00
LE452 2" Lip Extension Kit (Includes two 1" extensions)	60.00
LE453 3" Lip Extension Kit (Includes three 1" extensions)	90.00

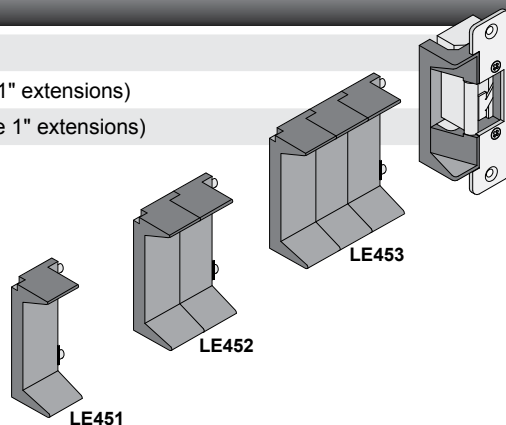

LE451

LE452

LE453

Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com







UniFLEX™ SPEC 55 SERIES ELECTRIC STRIKE, GRADE 1 HEAVY DUTY - Factory tested 2500 lbs

STANDARD ANSI 4-7/8" STRIKE PREP - NO CENTERLINE RELOCATION REQUIRED. 5 YEAR LIMITED WARRANTY


One strike with choice of interchangeable faceplates for cylindrical and mortise locksets with or without deadbolts. Designed for new and retrofit hollow metal frame installations. *Frame face modification required.




55-A




55-B




55-D



55-D



55-E



55-F

- Up to 3/4" Latchbolt and 1" Deadbolt
- Field Reversible, Failsafe/Failsecure
- 1/8" Horizontal alignment adjustment
- Dual Voltage 12/24VDC
- Exceeds 1,000,000 cycles
- Factory tested 2500 lbs static strength
- UL tested 1500 lb Static strength
- 70 ft-lb Dynamic strength
- ANSI/BHMA A156.31 Grade 1
- Internal Solenoid, No Heat in Keeper
- All parts stainless steel
- Non-handed



Warrack Hersey Tested according to:
UL 10C, 3 Hr Fire Rated, 4' x 8' single door
us NFPA-252



SECURITY UL 1034
Burglary-Resistant
BP10254
40WH

SPECIFY MODEL

LIST

Lockset compatibility: For locksets not listed below, see UniFLEX™ 55 Series datasheet, page 5, faceplate dimension
Deadbolt Application: 55-D, 55-E and 55-F, door will not close with deadbolt extended

MODEL Application

55-A	Compatible locks with all cylindrical locksets with up to 5/8" latch.	420.00
55-B	Mortise locksets and exit mortise devices with or without a deadlatch located below the latchbolt. <i>Accurate, Arrow, Best, Corbin Russwin, Dorma, Falcon, Marks, Sargent, Yale.</i>	440.00
55-C	Mortise locksets and mortise exit devices with or without a deadlatch located above the latchbolt. <i>SDC, Schlage, Baldwin, Hager</i>	440.00
55-D	Mortise locksets with a deadbolt and deadlatch located below the latchbolt. <i>Accurate, Arrow, Best, Corbin Russwin, Dorma, Falcon, Marks, Sargent, Yale.</i>	460.00
55-E	Mortise lockset with deadbolt and no deadlatch feature. <i>Baldwin.</i>	460.00
55-F	Mortise locksets with a deadbolt and a deadlatch located above the latchbolt. <i>SDC, Schlage, Hager.</i>	460.00

SPECIFY FINISH

Add to List

U 630 Dull Stainless Steel (std)			N/C
	G 612 Dull Bronze	P 625 Bright Chrome	40.00
D 606 Dull brass	H 613 Oil Rubbed Bronze	Q 626 Dull Chrome	40.00

SPECIFY MONITORING OPTIONS

Add to List

LBM/LCM available with 55-A, 55-B, 55-C; LBM/LCM/DBM available with 55-D, 55-E, 55-F

LBM	Latchbolt Monitor. Signals the door is closed and latched or unlatched and open. Non-handed.	60.00
LBM/LCM	Door Secure Monitor. Signals door is closed latched and the keeper is deadlocked. Also signals the door is unlatched or unlocked. Non-handed.	120.00
DBM-L	Deadbolt Monitor, Left Hand (Available with LCM and LBM. For D, E & F functions only)	60.00
DBM-R	Deadbolt Monitor, Right Hand (Available with LCM and LBM. For D, E & F functions only)	60.00

Accessories

Add to List

RMB	Buzzer, 12/24V. Indicates strike is energized	40.00
BR64XL	Wire Lead Rectifier. Converts AC to DC	25.00
LT	Tri-Color LED, red or green or amber. Indicates strike energized per field wiring	30.00

Monitoring Configurations

55-A, 55-B, 55-C:
LBM
LBM/LCM

55-D, 55-E, 55-F:
LBM
LBM/LCM
LBM/LCM/DBM



A



B or C



D or E



F




SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012



UniFLEX™ UNIVERSAL STRIKE — MULTI APPLICATION PACK

LIST

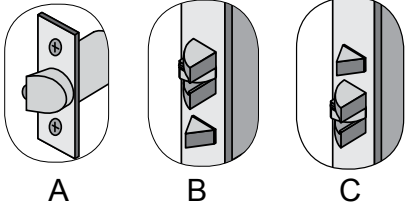


Application

- Adaptable to all 55-A, 55-B, 55C applications.
- Strike body and 5 faceplates
- For new and retrofit installation
- No relocation of the centerline.
- Non-handed

Operation

After releasing the latchbolt, the keeper returns to the locked position.

Finish: 630 Dull Stainless Steel



MODEL Application

55-ABC **Universal Strike** for cylindrical locks, mortise locks without deadbolts and mortise exit devices **460.00**
 including: *SDC, Accurate, Arrow, Baldwin, Best, Corbin Russwin, Dorma, Falcon, Hager, Marks, Sargent, Schlage, Yale.*

Lockset compatibility: For locksets not listed, see UniFLEX™ 55 Series datasheet, page 5, faceplate dimension

Price List Effective October 1, 2012



30 SERIES RIM MOUNT ELECTRIC STRIKES

Distributor Discount Code **FK**

Stainless steel electric strike for rim mount exit devices. Strike is non-handed, fail secure is standard with fail safe optional. Standard finish is stainless steel 630 (U). Check template to ensure compatibility.



30-4

SPECIFY MODEL		LIST
30-4-12	Stainless steel electric strike designed for rim-type exit devices 12VDC@ 0.51Amp	675.00
30-4-24	Stainless steel electric strike designed for rim-type exit devices 24VDC@ 0.25Amp	675.00
SPECIFY FINISH		Add to List
U	630 Dull Stainless Steel (Standard)	N/C
OPTIONS		Add to List
FS	Failsafe operation	35.00
	BR64XL Rectifier	25.00
LCBMA-30	Latch & locking cam monitor	215.00


Not Compatible with SDC S6000
See S6000 Electric Trim page 8.30





CONVENTIONAL MORTISE BOLT LOCKS

Distributor Discount Code **AK LIST**

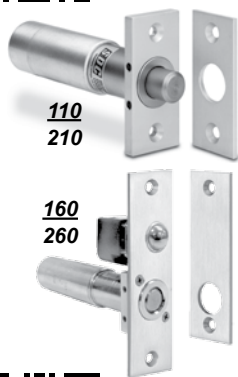

110/160 Dual Voltage Coil: 900/450 mA @ 12/24 VDC
210/260 Dual Voltage Coil: 900/450 mA @ 12/24 VDC
Mortise strike standard. **Not for use in wood frames.**

Locknetics replacements available for discontinued models 401, 402 and 404. Contact factory, POA.

5" depth required

110IV	2-3/4" x 1-1/4" Face plate, less auto relock switch, failsafe V 628 Aluminum (standard)	180.00
210HV	2-3/4" x 1-1/4" Face plate, less auto relock switch, failsecure V 628 Aluminum (standard)	180.00
160IV	4-7/8" x 1-1/4" Face plate with auto relock switch, failsafe V 628 Aluminum (standard)	240.00
260HV	4-7/8" x 1-1/4" Face plate with auto relock switch, failsecure V 628 Aluminum (standard)	240.00



SPACESAVER® MORTISE BOLT LOCKS FIT 1-3/4" FRAMES

Distributor Discount Code **AK LIST**

Dimensions: 8"L x 1-1/2"W x 1-5/8"D
FS/1090/1490 Dual Voltage Coil: 900/450 mA @ 12/24 VDC
1290/2490 Dual Voltage Coil: 900/450 mA @ 12/24 VDC



UL US LISTED Auxiliary Locks

UL10C Positive Pressure Compliant
UBC Classified in accordance with Uniform Building Code standard 7-2 "Fire Test for Door Assemblies"



FS23MIV	Dual failsafe	360.00
1091AIV	Failsafe	350.00
1091ADLIV	Dead locking, failsafe	415.00
1291AHV	Failsecure	415.00
1490AIV	Fits 1-1/2" frame (non UL), failsafe	415.00
2490AHV	Failsecure. Fits 1-1/2" frame (non UL), failsecure V 628 Aluminum Finish (standard)	490.00

SPECIAL FINISHES

Add to List

Y	335 Black	36.00
Plated Architectural Finishes Special order - no cancellations, no return		
C	605 Bright Brass	78.00
D	606 Dull Brass	78.00
F	611 Bright Bronze	78.00
G	612 Satin Bronze	78.00
H	613 Oil Rubbed Bronze	78.00
P	625 Bright Chrome	78.00
Q	626 Dull Chrome	78.00
U	630 Stainless Steel	78.00



HEAVY DUTY SPACE SAVER® MORTISE BOLT LOCKS

Distributor Discount Code **AK LIST**

1190A failsafe, 0.7Amp @ 24VDC
2090A failsecure, 2.5 Amp In rush, 0.4 Amp seated @ 24VDC

1190AU	Failsafe	415.00	2090AU	Failsecure	515.00
---------------	----------	---------------	---------------	------------	---------------

Standard Finish: **U** 630 Dull Stainless Steel
Specialty Lock Applications available by request

UL US LISTED Auxiliary Locks

UL10C Positive Pressure Compliant
UBC Classified in accordance with Uniform Building Code standard 7-2 "Fire Test for Door Assemblies"

OPTIONS

Add to List

B	Bolt position sensor, SPDT	55.00
D	Door position sensor, SPDT	55.00
BR64XL	Rectifier for AC Operation	25.00
PR1000	Power Regulator for 1090 and 1190 series	60.00



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective October 1, 2012



SURFACE MOUNT BOLT LOCKS


Distributor Discount Code **AK LIST**




180/280

Dimensions: 6" L x 2" W x 2" H
Standard finish: 628 Aluminum, block strike included
180 Dual Voltage Coil: 900/450 mA @ 12/24 VDC
280 Dual Voltage Coil: 900/450 mA @ 12/24 VDC

Door Hand
See page 1.4



Surface Mount
Outswing Door



Top Jamb
Inswing or Sliding Door

MODEL

180ALIV	Surface mount, left hand, failsafe, with auto relock	260.00
180ARIV	Surface mount, right hand, failsafe, with auto relock	260.00
180ALRIV	Top Jamb, left hand reverse, failsafe, with auto relock	260.00
180ARRIV	Top Jamb, right hand reverse, failsafe, with auto relock	260.00
280LHV	Surface mount, left hand, or top jamb mount right hand reverse, failsecure less auto relock	260.00
280RHV	Surface mount, right hand, or top jamb mount, left hand reverse, failsecure less auto relock	260.00

SPECIFY FINISH

[Add to List](#)

Single Surface Mounted Bolt Locks

Y	335 Black	55.00
----------	-----------	--------------

SPECIFY OPTIONS

[Add to List](#)

B	Bolt position sensor, SPDT	55.00
D	Door position sensor, SPDT	55.00
BR64XL	Rectifier for AC Operation	25.00

Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com



10 - Electric Bolt Locks



PROGRAMMABLE CABINET LOCK

Distributor Discount Code **AK LIST**



SDC's 295 Battery Powered Keyless Cabinet Lock provides an easy, economical solution for security and keyless access control for a wide variety of cabinet doors, drawers, storage lockers and more. Quickly and easily add/delete up to 30 individual user PIN codes with programmable keypad. Powered by 2 x AAA batteries, the need for low voltage wiring is eliminated. 2 Programmable Application Modes.

Dimensions: 5.5"H x 1.4"W x 0.85"D - 1.25"D w/Dial (40 x 35.5 x 21.5mm - 32mm w/Dial)



MODEL

295	Programmable cabinet lock	150.00
------------	---------------------------	---------------



CABINET LOCK

Distributor Discount Code **AK LIST**



- For drawers, cabinets or display cases with swinging or sliding doors
- Failsecure (field reversible for failsafe)
- Dual Voltage: 12/24VDC @ 250mA/130mA
- Dimensions: 3.25" L x 1.125" W x 1.125" D
- Finish: Black

MODEL

290	Micro cabinet lock	105.00
290LS	Micro cabinet lock with locked status switch	130.00



1583 MICRO CABINET EMLock®

Distributor Discount Code **GK LIST**



Holding Power 300lbs.

Dual voltage: 500/250 mA @ 12/24 VDC
Dimensions: Lock 6-1/2"L x 1-1/8"W x 1-1/4"H
Armature 5-1/8"L x 1-1/8"W x 1/4"H

MODEL

1583V	Micro EMLock® for cabinets, drawers and lockers	196.00
--------------	---	---------------



Excel™ Architectural Series

Distributor Discount Code **GK LIST**



- Door status, lock status and Bi-color LED
- Interlocking quick mount assembly
- Self drilling and tapping mounting screws and machine screws
- Adjustable mounting bracket
- Wire access chamber with terminal block
- Dual voltage 12/24VDC
- 628 Clear anodized aluminum


Model

E300	300 lb / 136 kg with door status, locked status and LED	170.00
-------------	---	---------------



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective October 1, 2012

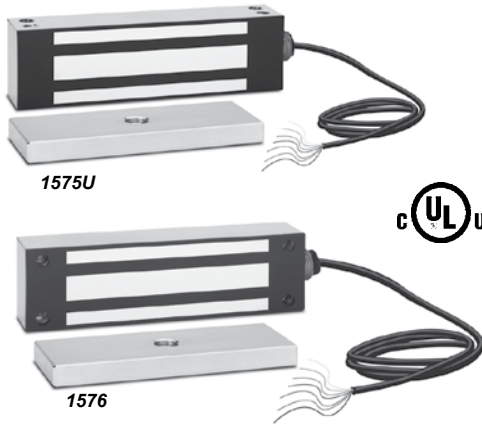


Holding Power 1200lbs.
 Magnetic Bond Sensor and Door Position Sensor Standard
Dual voltage: 450 / 225 mA @ 12/24VDC
 10 Ft cable
 Brushed stainless steel housing

Conduit fitting: 1/2" x 3/4"
Dimensions: 8-11/16" L x 2-1/2" H x 1-5/8" D





MODEL	DESCRIPTION	
1575U	Single EMLock® with magnetic bond and door status sensors	435.00
1576U	Single EMLock® face drilled mounting with magnetic bond and door status sensors	435.00

ACCESSORIES

Add to List

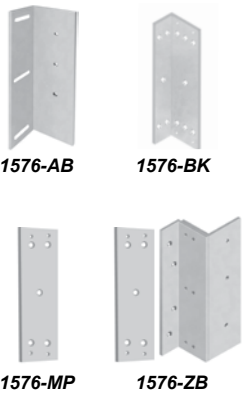

MODEL	DESCRIPTION	
For sliding gate applications		
1576-BK	Mounting Bracket for 1576	80.00
1576-AB	Armature Mounting Bracket for 1576	80.00
For swinging gate or top jamb door application		
1576-MP	Lock Mounting Plate for 1576	55.00
1576-ZB	Lock Mounting Bracket for 1576 (Includes 1576-MP)	160.00

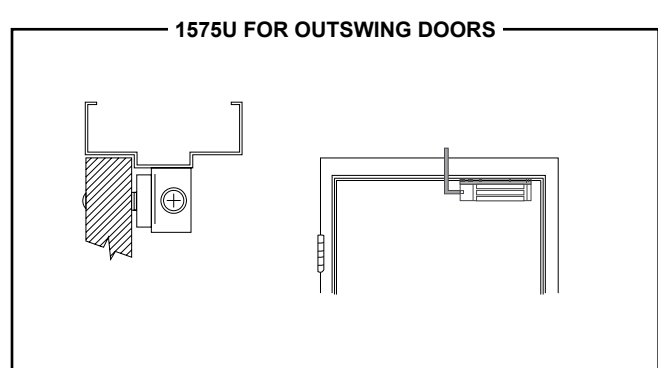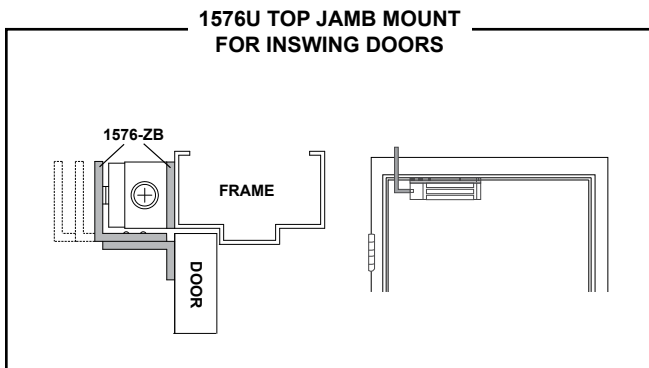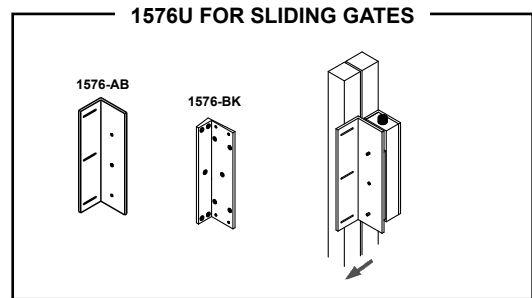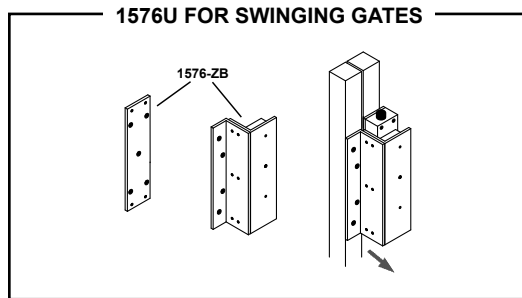




350 Narrow Line EMLock®


Distributor Discount Code **GK**



350V

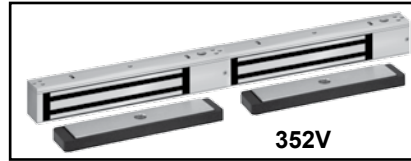


352V

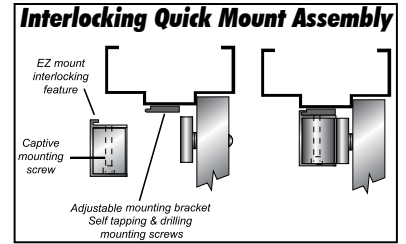

Price List Effective October 1, 2012

Magnetic Lock Height Comparison



350 Single Specifications

Holding Force	1200 lbs
Input Voltage	Dual 12/24 VDC
Current	300mA @ 24VDC / 540mA @ 12VDC
Dimensions	12-1/2"L x 2-1/8"H x 1-11/16"W (318 x 54 x 43mm)
Magnetic Bond Sensor	1-SPDT output, 250mA max. @ 12/24VDC
Door Status Sensor	1-SPDT output, 250mA max. @ 12/24VDC
LED Indicator	Green-Secure, Red-Unlocked

352 Double Specifications

Holding Force	1200 lbs per door leaf
Input Voltage	Dual 12/24 VDC
Current	600mA @ 24VDC / 1080mA @ 12VDC
Dimensions	25"L x 2-1/8"H x 1-11/16"W (635 x 54 x 43mm)
2 Magnetic Bond Sensors	SPDT outputs, 250mA max. @ 12/24VDC
2 Door Status Sensor	SPDT outputs, 250mA max. @ 12/24VDC
2 LED Indicators	Green-Secure, Red-Unlocked

MODEL	DESCRIPTION	LIST
350V	Single Narrow Line Magnetic Lock, 628 Aluminum, specify 2 for pair of doors with mullion, Retrofits Locknetics MagForce 350+ & 350+/DSM/MBS/L1	375.00
352V	Double Narrow Line Magnetic Lock, 628 Aluminum, for pair of doors without mullion, Retrofits Locknetics MagForce 352+ & 352+/DSM/MBS/L2	750.00

Top Jamb Mounting Kit

Distributor Discount Code **GK** **LIST**

TJ350	Single	120.00
TJ352	Double	196.00

GLASS DOOR MOUNTING KIT

Distributor Discount Code **GK** **LIST**

- Field adjustable for 1/2", 5/8" and 3/4" all glass Herculite doors

HDB350	Single	180.00	HDB352	Double, 2 single kits	360.00
---------------	--------	---------------	---------------	-----------------------	---------------

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com



12 - Magnetic Locks



EXCEL™ SERIES VALUE ENGINEERED MAGNETIC LOCKS

The Excel™ product line is designed for system integrators, distributors, installers and building owners presently using low cost import or private label brand access control hardware.



E6200



E300
see page 11.4




E1200




E600




E1200-390MP



Retrofit Kit



E12Z/E6Z
Field adjustable



E12U/E6U
Field adjustable
to glass thickness



E12A



E6A



E12L

Excel™ Industrial Series

Distributor Discount Code **GK LIST**

- Retrofits popular competitive brands
- Magnetic Bond Sensor and door status standard
- Epoxy sealed electronics, tamper resistant and weatherized for indoor and outdoor use (retrofits M62j)
- Stainless steel machine screws and blind nuts
- 10 ft [3.05m] jacketed, stranded conductor cable
- Dual voltage 250/150 mA @ 12/24VDC
- Architectural stainless steel housing, US32D/630

MODEL

E6200	1200 lb / 545 kg with SPDT door status, SPDT magnetic bond sensor	425.00
--------------	---	---------------

Top Jamb Mounting Kit

Distributor Discount Code **GK LIST**

TJ62	Top jamb kit for E6200	120.00
-------------	------------------------	---------------

Excel™ Architectural Series

Distributor Discount Code **GK LIST**



- Door status, lock status and Bi-color LED
- Interlocking quick mount assembly
- Self drilling and tapping mounting screws and machine screws
- Adjustable mounting bracket
- Wire access chamber with terminal block
- Dual voltage 12/24VDC
- 628 Clear anodized aluminum

Models

E1200	1200 lb / 545 kg with door status, locked status and LED	265.00
--------------	--	---------------

E600	600 lb / 272 kg with door status, locked status and LED	220.00
-------------	---	---------------

Retrofit Kit for Discontinued Locknetics 390+ PLUS



Distributor Discount Code **GK LIST**

Enables replacement of Locknetics 390+ PLUS with SDC's E1200 (ordered separately)

E1200-390MP	Retrofit Kit <i>Includes lock mounting plate and armature that retrofit existing 390+ mounting holes. When alignment permits, existing 390+ armature may be used.</i>	35.00
--------------------	---	--------------

Top Jamb Mounting Kit for Inswing Doors

Distributor Discount Code **GK LIST**

E12Z	Top jamb kit for E1200	85.00
-------------	------------------------	--------------

E6Z	Top jamb kit for E600	85.00
------------	-----------------------	--------------

Glass Door Armature Mounting Kit

Distributor Discount Code **GK LIST**

E12U	Glass door kit for E1200	120.00
-------------	--------------------------	---------------

E6U	Glass door kit for E600	120.00
------------	-------------------------	---------------

Mounting Brackets and Filler Plates

Distributor Discount Code **GK LIST**

Used for the extension of a narrow frame header mounting surface, the bracket provides additional surface area for proper lock mounting

E12A	E1200 adjustable angle bracket. 10-1/2"L x 1-3/4"H x 3-1/8"D (266 x 44 x 79mm)	35.00
-------------	--	--------------

E6A	E600 adjustable angle bracket. 9-7/8"L x 1-1/4"H x 2-1/4"D (250 x 32 x 57mm)	25.00
------------	--	--------------

E12L	E1200 angle bracket. 10-1/2"L x 1-1/2"H x 3/4"D (266 x 38 x 19mm) Field cut for E600	25.00
-------------	---	--------------

Used where the frame stop does not provide enough mounting surface, the filler bar provides enough additional surface area for proper lock mounting.

E12F01	E1200 stop filler plates. 5/8"H x 3/4"D x 10-1/2"L (16 x 19 x 266mm) Field cut for E600.	20.00
---------------	---	--------------

E12F02	E1200 stop filler plates. 3/4"H x 3/4"D x 10-1/2"L (19 x 19 x 266mm) Field cut for E600.	20.00
---------------	---	--------------





E12F01
E12F02



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012



GWXT Auxiliary Locks
CVXJ Burglary Resistant Electrically Operated Door Lock



UL10C Positive Pressure Compliant
UBC Classified in accordance with
Uniform Building Code standard 7-2
"Fire Test for Door Assemblies"

1510 Series Grade 1
1650 lb / 748 Kg Holding Force

1570 Series Grade 1
1200 lb / 544 Kg Holding Force

1580 Series Grade 1
650 lb / 295 Kg Holding Force

Electrical Specifications

Electrical Specifications

Electrical Specifications

Voltage: 12/24VDC Voltage Sensing Input
Single: 350mA @ 24VDC; 670mA @ 12VDC
Double: 700mA @ 24VDC; 1.34A @12VDC

3 Watt Power Saver
Voltage: 12/24VDC Voltage Sensing Input
Single: 125mA @ 24VDC; 250mA @ 12VDC
Double: 250mA @ 24VDC; 500mA @ 12VDC

Voltage: 12/24VDC Voltage Sensing Input
Single: 220mA @ 24VDC; 440mA @ 12VDC
Double: 440mA @ 24VDC; 880mA @ 12VDC

Mechanical Specifications

Mechanical Specifications

Mechanical Specifications

Single: 11" L x 2.75" H x 1.562" D
(279.4 x 69.9 x 39.7 mm)

Single: 11" L x 2.75" H x 1.562" D
(279.4 x 69.9 x 39.7 mm)

Single: 8.75" L x 2.125" H x 1.25" D
(222.2 x 54 x 31.8 mm)

Double: 22" L x 2.75" H x 1.562" D
(558.8 x 69.9 x 39.7 mm)

Double: 22" L x 2.75" H x 1.562" D
(558.8 x 69.9 x 39.7 mm)

Double: 17.5" L x 2.125" H x 1.25" D
(444.5 x 54 x 31.8 mm)



1511

EMLOCK® MODELS

Distributor Discount Code **GK** LIST

1650lb / 748 kg Holding Force, Automatic Voltage Sensing Input

1511	Single EmLock®	450.00
1512	Double EmLock®	900.00
1513	Single EmLock®, split armature for pair of doors	505.00



1512

1200lb / 544 kg Holding Force, Automatic Voltage Sensing Input

1571	Single EmLock®	420.00
1572	Double EmLock®	850.00
1573	Single EmLock®, split armature for pair of doors	475.00



1571

650lb / 295 kg Holding Force, Automatic Voltage Sensing Input

1581	Single EmLock®	350.00
1582	Double EmLock®	690.00



1571



1572

SPECIFY FINISH

Add to List

Anodized Finishes (Architectural Housing: Add 20.00 per foot to base)		Single EmLock	Double Emlock
V	628 Aluminum (standard)	N/C	N/C
Y	335 Black	80.00	120.00
Powder Coat Finishes (a coating electrostatically applied to form a hard finish, that is tougher than conventional paint)			
X	Dark Bronze Powder Coat Painted (313/613 Equal)	80.00	120.00
C	Brass Powder Coat Painted	80.00	120.00
Plated Finishes - Special order, no cancellation, no returns			
P	625 Bright Chrome	190.00	220.00
Q	626 Dull Chrome	190.00	220.00

Architectural Housing add \$30 per foot to above Single Unit Price.



1573



1581



1582



1583

see page 11.42



1575U

see page 11.44



1576

see page 11.44

Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com



12 - Magnetic Locks

SPECIFY OPTIONS

Add to List

See Modular Program price list when ordering separately for field upgrades. Different part numbers and pricing apply.

T	Adjustable timer. Built in field adj. 0-30 sec. relock delay. Specify one for single or double EmLocks® (not available with 1580 series)	64.00
D	Door position sensor. Indicates door open and door closed. Specify two for double EMLocks® (not available with 1513 and 1573) SPDT Dry, 250 mA @ 30VDC.	40.00
B	Magnetic bond sensor. Indicates locked with full holding power and unlocked, low holding power, low voltage, tampering and obstruction between armature and magnetic core. Specify (2) for double EmLocks (Not available with 1513 and 1573) • 1510 & 1570 Series: SPDT Dry, 250 mA @ 30VDC. • 1580 Series: SPST N.O., Dry, 250 mA @ 30VDC.	60.00
L	Bi-color status LED indicator. Field selectable Red and Green. (Not installed in lock.) Indicates lock energized when wired to lock input. Indicates de-energized/unlocked or "Enter/Go" when wired to built-in TD Module Indicates energized and de-energized or "Enter/Go" when wired to access control auxiliary output. Indicates door is closed and locked and door is unlocked when wired to Bond Sensor.	16.00
A	Anti-tamper sensor. Indicates access cover removal. SPDT Dry, 1 Amp @ 30VDC	50.00

SPECIFY MODEL

Distributor Discount Code **GK LIST**

Kits for 1200lb and 1650 lb Locks		Kits for 650lb Locks	
TJ1	Single	TJ81	Single
TJ2	Double	TJ82	Double
			120.00
			196.00

Add to List

Anodized Finishes

			Single Top Jamb	Double Top Jamb
V	628 Aluminum (std)	N/C	80.00	160.00
		Y Black Anodized		

Powder Coat Finishes (a coating electrostatically applied to form a hard finish, that is tougher than conventional paint)

X Dark Bronze Powder Coat Painted	C Brass Powder Coat Painted	80.00	160.00
--	------------------------------------	--------------	---------------

Plated Finishes - Special order, no cancellation, no returns

P 625 Bright Chrome	Q 626 Dull Chrome	190.00	220.00
----------------------------	--------------------------	---------------	---------------

Add to List

SPECIFY GLASS DOOR MOUNTING KIT

Distributor Discount Code **GK LIST**

- Universal glass door kits are compatible with lock models, except 1513 and 1573
- Field adjustable for 1/2", 5/8" and 3/4" all glass Herculite doors

Kits for 1511, 1571, 1581		Kits for 1512, 1572, 1582	
HDB1	Single	180.00	HDB2 Double, 2 single kits
			360.00

Add to List

Anodized Finishes

			Single	Double
V	628 Aluminum (std)	N/C	80.00	160.00
		Y Black Anodized		



Powder Coat Finishes (a coating electrostatically applied to form a hard finish, that is tougher than conventional paint)

X Dark Bronze Powder Coat Painted	C Brass Powder Coat Painted	80.00	160.00
--	------------------------------------	--------------	---------------


Plated Finishes - Special order, no cancellation, no returns

P 625 Bright Chrome	Q 626 Dull Chrome	100.00	200.00
----------------------------	--------------------------	---------------	---------------

Add to List




Field Upgrade without Removing from the Frame

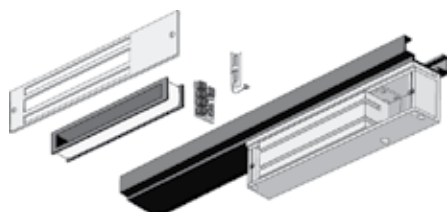

- Field Install
- Monitoring outputs
 - Timers
 - Top jamb "Z" kit
 - Glass door kits

Interlocking Quick Mount Assembly

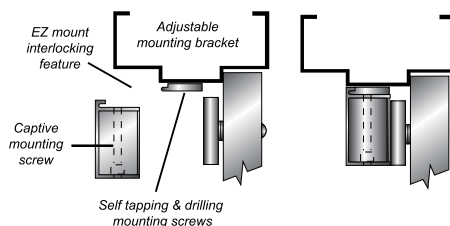

SPECIFY ARCHITECTURAL HOUSINGS

GK Add to List

Full Width Housings - Appear as part of the frame to provide a superior architectural appearance.
Vertical Housings - Side jamb mount, accommodates two 1571 or two 1511 EMLocks® providing 2,400 or 3,300 lbs. of holding force.

Compatible with Models: 1511, 1512, 1571, 1572 with or without HDB kits.
 Specify housings with your EMLocks®.

Single Door Housing

30	30" Lock housing	400.00
36	36" Lock housing	400.00
40	40" Lock housing	400.00
48	48" Lock housing	400.00
CH	Custom length. Specify exact length	POA

Double Door Housing

60	60" Lock housing	650.00
72	72" Lock housing	650.00
84	84" Lock housing	650.00
96	96" Lock housing	650.00
CH	Custom length. Specify exact length	POA

Vertical Housings

V82	84" high opening (Actual length 82" for 84" opening)	650.00
CV	Custom length. Specify exact length	POA

See 12.47 for special finish designation and finish price

Retrofit Kit for Discontinued Locknetics 390+ PLUS

NEW

Distributor Discount Code

GK

LIST

Enables replacement of Locknetics 390+ PLUS with SDC's 1511 and 1571 (ordered separately)

1511-390AMP	Retrofit Kit includes lock mounting plate with self-tapping & drilling screws and Armature assembly, utilizes existing 390+ thru-bolt hole.	50.00
--------------------	---	--------------

Field Installed Modular Upgrade Kits

Ordered separately for field upgrade without removing the lock from the frame

For complete details contact SDC to request the Modular Upgrade Kit datasheet or download from the SDC website: www.sdcsecurity.com/docLibrary.aspx All available through shipQuick Inventory

EZ-T-10	Adjustable Timer Input Module: Specify (1) for single or double EmLocks® (not available with 1580 series)	64.00	EZ-A	Anti-Tamper Switch Module: Indicates cover plate removal.	50.00
EZ-D-10	1510, 1570 Door Position Sensor Module: Specify (2) for double EmLocks® (not available with 1513 and 1573)	40.00	EZ-1510W	Holding Force Module: Replace a 1200lb wire core (1570 series) with this 1650lb wire core. Specify (2) for double EmLocks®	50.00
EZ-D-80	1580 Door Position Sensor Module: Specify (2) for double EmLocks®	40.00	EZ-1570W	Energy Saver Module: Save on power supply and long term energy costs by replacing 8.4 Watt, 1650lb coil with 3 Watt, 1200lb holding force coil. Specify (2) for double EmLocks®	50.00
EZ-B-10	1510, 1570 Magnetic Bond Sensor Module: Specify (2) for double EmLocks® (Not available with 1513,1573)	60.00	EZ-B-80	1580 Magnetic Bond Sensor Module (SPST): Specify (2) for double EmLocks®	60.00

REUSABLE HEAVY DUTY DRILL FIXTURE

Distributor Discount Code

G

LIST

1511-DF	Heavy duty drill fixture for 1571 and 1511	150.00
1581-DF	Heavy duty drill fixture for 1580	150.00
BN-PT	Blind Nut Placement Tool	120.00
BN-50	Blind Nuts, 10/32, 50 Pack	50.00

Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
 801 Avenida Acaso • Camarillo, CA 93012
 Email: Service@sdsecurity.com • www.sdcsecurity.com



12 - Magnetic Locks





UNIVERSAL HEADER BRACKET

Distributor Discount Code **GK LIST**

Used in lieu of angle brackets, the Universal Header Bracket provides a faster mounting solution, saving time and labor costs for several EmLock® models. Reduce potential for mis-sized and misaligned mounting holes, broken taps, removal of broken taps. Combined with interlocking E-Z mount assembly, save up to a half day's labor with the installation of 12 locks.

Features

- Solid 1" bar provides higher security and superior aesthetics.
- Machined wire chase provides concealed and secure wiring
- Multiple pre-drilled and tapped mounting holes to accommodate the use of several different locks on either 4" or 4.5" aluminum frames




UB11V	Bracket for 1511, 1513, 1571. 1" x 1" x 11"	64.00
UB12V	Bracket for 1512, 1572. 1" x 1" x 22"	128.00
See special finishes 12.51		



ALUMINUM SPACER BRACKET & CONCRETE FILLED FRAME PLATE - PRE-DRILLED & TAPPED

Distributor Discount Code **GK LIST**





UF11V

Application

- Aluminum frames with blade stop - lowers EmLock® below blade stop
- Concrete filled hollow metal frames - provides multiple points for concealed wire entry

Features

- Pre-drilled and tapped specifically for 1510, 1570, 1580 EmLock
- Machined wire chase provides multiple points for concealed wire entry from concrete filled frames.



UF11V	Bracket for 1511, 1513, 1571, 1573. 1/2" x 1-1/2" x 11"	90.00
UF12V	Bracket for 1512 and 1572. 1/2" x 1-1/2" x 22"	112.00
UF81V	Bracket for 1581. 1/2" x 1-1/4" x 8-3/4"	72.00
UF82V	Bracket for 1582. 1/2" x 1-1/4" x 17-1/2"	100.00



ARMATURE MOUNTING PLATE

Distributor Discount Code **GK LIST**




The AR Mounting plate provides a solution for mounting the EmLock® armature to the top rail of aluminum, glass, wood and hollow metal doors that do not permit the use of thru bolts. Dimension: 8 1/2" x 3"



AR11Y

MODEL

AR11Y	Armature mounting plate (Black) Specify two for models 1512, 1572	60.00
AR11YD	Armature mounting plate (black) with door sensor Specify two for models 1512, 1572	100.00



DOOR COORDINATOR LOCK MOUNTING KIT

Distributor Discount Code **GK LIST**



DC-1	Door coordinator mounting bracket for single models 1511 and 1571.	120.00
DC-2	Door coordinator mounting bracket for double models 1512 and 1572.	220.00



DC-1




DC-2

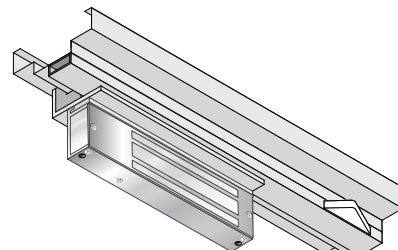


SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012




FILLER PLATES

Distributor Discount Code **GK**

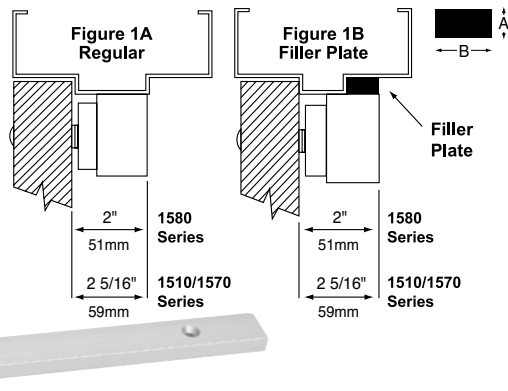

ANGLE BRACKETS

Distributor Discount Code **GK**

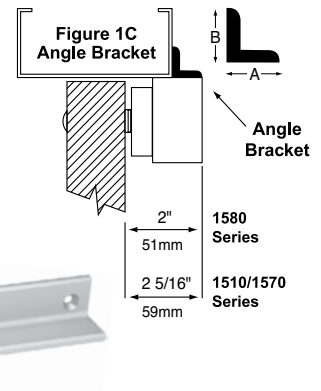

Price List Effective October 1, 2012

FILLER PLATES: For extension of the stop to provide a proper mounting surface on the underside of the header. See Figure 1B.

ANGLE BRACKETS: Used as extension on shallow door frames to provide adequate mounting surface. See Figure 1C.

FOR 8-3/4" (222mm) SINGLE EMLOCK MODELS

PART #	A x B	LIST
FP01	1/8" x 1-1/4" (3 x 32mm)	30.00
FP02	1/4" x 1-1/4" (6 x 32mm)	32.00
FP03	3/8" x 1-1/4" (10 x 32mm)	34.00
FP04	1/2" x 1-1/4" (13 x 32mm)	36.00
FP05	5/8" x 1-1/4" (16 x 32mm)	36.00

FOR 11" (279mm) SINGLE EMLOCK MODELS

PART #	A x B	LIST
FP11	1/8" x 1-1/4" (3 x 32mm)	33.00
FP12	1/4" x 1-1/4" (6 x 32mm)	34.00
FP13	3/8" x 1-1/4" (10 x 32mm)	34.00
FP14	1/2" x 1-1/4" (13 x 32mm)	38.00
FP15	5/8" x 1-1/4" (16 x 32mm)	40.00

FOR 17-1/2" (445mm) DOUBLE EMLOCK MODEL

PART #	A x B	LIST
FP30	1/8" x 1-1/4" (3 x 32mm)	38.00
FP31	1/4" x 1-1/4" (6 x 32mm)	40.00
FP32	3/8" x 1-1/4" (10 x 32mm)	42.00
FP33	1/2" x 1-1/4" (13 x 32mm)	44.00
FP34	5/8" x 1-1/4" (16 x 32mm)	46.00

FOR 22" (559mm) DOUBLE EMLOCK MODELS

PART #	A x B	LIST
FP21	1/8" x 1-1/4" (3 x 32mm)	38.00
FP22	1/4" x 1-1/4" (6 x 32mm)	40.00
FP23	3/8" x 1-1/4" (10 x 32mm)	42.00
FP24	1/2" x 1-1/4" (13 x 32mm)	44.00
FP25	5/8" x 1-1/4" (16 x 32mm)	46.00

FOR 8-3/4" (222mm) SINGLE EMLOCK MODELS

PART #	A x B	LIST
AB01	1" x 1" (25 x 25mm)	38.00
AB02	1" x 1-1/2" (25 x 38mm)	40.00
AB03	1-1/2" x 1-1/2" (38 x 38mm)	42.00
AB04	2" x 1-1/2" (51 x 38mm)	44.00

FOR 11" (279mm) SINGLE EMLOCK MODELS

PART #	A x B	LIST
AB11	1" x 1" (25 x 25mm)	40.00
AB12	1" x 1-1/2" (25 x 38mm)	42.00
AB13	1-1/2" x 1-1/2" (38 x 38mm)	44.00
AB14	2" x 1-1/2" (51 x 38mm)	46.00

FOR 17-1/2" (445mm) DOUBLE EMLOCK MODEL

PART #	A x B	LIST
AB30	1" x 1" (25 x 25mm)	50.00
AB31	1" x 1-1/2" (25 x 38mm)	54.00
AB32	1-1/2" x 1-1/2" (38 x 38mm)	58.00
AB33	2" x 1-1/2" (51 x 38mm)	62.00

FOR 22" (559mm) DOUBLE EMLOCK MODELS

PART #	A x B	LIST
AB21	1" x 1" (25 x 25mm)	50.00
AB22	1" x 1-1/2" (25 x 38mm)	54.00
AB23	1-1/2" x 1-1/2" (38 x 38mm)	58.00
AB24	2" x 1-1/2" (51 x 38mm)	62.00

SPECIFY FINISH

Add to List

	Single EmLock	Double EmLock
V 628 Aluminum (standard)	N/C	N/C
Y 335 Black Anodized	30.00	60.00
Powder Coat Finishes (a coating electrostatically applied to form a hard finish, that is tougher than conventional paint)		
X Dark Bronze Powder Coat Painted	30.00	60.00
C Brass Powder Coat Painted	30.00	60.00
Plated Finishes - Special order, no cancellation, no returns		
P 625 Bright Chrome	30.00	60.00
Q 626 Dull Chrome	30.00	60.00

SECURITY DOOR CONTROLS

801 Avenida Acaso • Camarillo, CA 93012

Email: Service@sdsecurity.com • www.sdsecurity.com



12 - Magnetic Locks



HI/SHEAR CONCEALED EMLock®

Distributor Discount Code **OK**


EMLock®
Lifetime Warranty




GWXT Auxiliary Locks CVXJ Burglary Resistant Electrically Operated Door Lock




UL10C Positive Pressure Compliant
UBC Classified in accordance with Uniform Building Code standard 7-2 "Fire Test for Door Assemblies"



1561




1562




1565



1566



HTR



WDRB

Features

- Door static and relock sensor, detects door is closed, at rest and aligned before relocking
- Automatic voltage sensing input
- Lateral and vertical alignment adjustment
- Floating armature with alloy steel shear tabs

Electrical Specifications

- 1561 and 1562: 650/350 mA @ 12/24VDC Auto-Sensing
- 1565 and 1566: 800/400 mA @ 12/24VDC Auto-Sensing

CONCEALED HI/Shear EMLock

List

2,000 Lbs. Holding Force, 8" x 1-1/2" Lock

1561	1-5/8" depth, integrated electronics for 1-3/4" to 2" frames	765.00
1562	1-1/4" depth, with external electronics, for 1-1/4" to 1-3/4" frames	765.00

2,700 Lbs. Holding Force, 10-7/16" x 1-1/2" Lock

1565	1-5/8" depth, integrated electronics, for 1-3/4" to 2" frames	830.00
1566	1-1/4" depth, external electronics, for 1-1/4" to 1-1/2" frames	830.00

SPECIFY ARMATURE

Armature supplied with lock. Specify type required: **1565/1566 ITC, FTC or HTC**
1561/1562 ITCM, FTCM or HTC

ITC	Standard mounting armature kit for aluminum and hollow metal doors with 7/8" to 1-1/8" deep top channels, wood doors and factory prepared hollow metal flush edge doors.	N/C
FTC	Mounting kit for field prepared horizontal mounting in hollow metal doors with flush edge.	N/C
HTC	Mounting kit for 1-15/16" deep herculite channels	N/C

OPTIONS


Add to List

HTR	Herculite top rail armature adjustment bracket for leading edge adjustments.	340.00
B	Bond sensor indicates proper armature contact and reduced holding power due to improper armature contact or tampering. SPDT 0.25 Amp maximum (not available on 1562 and 1566)	110.00
D	Door position switch indicates door open or closed. SPDT 0.25 Amp maximum.	50.00
L-3	External LED status indicator, mounts separately through the frame and may be used to indicate lock is energized or wired to BAS bond sensor for door status.	16.00
WDRB	Wood door reinforcement box for 1565 and 1566	40.00
WDRBM	Wood door reinforcement box for 1561 and 1562	40.00



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective October 1, 2012



HI/SHEAR SEMI-CONCEALED & SURFACE MOUNT EMLock®

Distributor Discount Code **OK**

EMLock®

Lifetime Warranty



ANSI/BHMA A156.23
Grade 1




3774-0324:100

MEA


City of New York

768-80-SA

Price List Effective October 1, 2012



1562SC



1562SCHDB



1561S



1561TJ

SEMI-CONCEALED HI/SHEAR EMLOCKS

List

2,000 Lbs. Holding Force, 8" x 1-1/2" x 1-1/4" Lock

1562SC	1-1/4" depth, with external electronics, for 1-1/4" to 1-3/4" For Hollow metal frames	900.00
1562SCHDB1/2	1-1/4" depth, with external electronics, for 1-1/4" to 1-3/4" frames For 1/2" Herculite full glass doors	1,115.00
1562SCHDB3/4	1-1/4" depth, with external electronics, for 1-1/4" to 1-3/4" frames For 3/4" Herculite full glass doors.	1,115.00

SURFACE MOUNT HI/SHEAR EMLOCKS

List

2,000 Lbs. Holding Force, 8" x 1-3/4" x 1-3/4" Lock
For Hollow metal frames and wood or hollow metal doors

1561S	Surface mount for the push side of the door with integrated electronics	1060.00
1561TJ	Surface top jamb mount for the pull side of the door with integrated electronics	1060.00

STANDARD FINISH

Add to List

V 628 Anodized Aluminum	N/C
Y Black Anodized	60.00
Powder Coat Finishes (a coating electrostatically applied to form a hard finish, that is tougher than conventional paint)	
X Dark Bronze Powder Coat Painted	80.00
C Brass Powder Coat Painted	60.00
Plated Finishes - Special order, no cancellation, no returns	
P 625 Bright Chrome	Q 626 Dull Chrome
	190.00

OPTIONS

Add to List

B	Bond sensor indicates proper armature contact and reduced holding power due to improper armature contact or tampering. SPDT 0.25 Amp maximum (not available on 1562 and 1566)	110.00
D	Door position switch indicates door open or closed. SPDT 0.25 Amp maximum.	50.00
L-3	External LED status indicator, mounts separately through the frame and may be used to indicate lock is energized or wired to BAS bond sensor for door status.	16.00



1511S / T

VOICE & DIGITAL ANNUNCIATION

The Exit Check® 1511S series incorporates an alternating 85 db tone and voice message with a digital countdown display and sign that provides clear and comprehensive instructions for persons without prior knowledge of door operation. This is especially significant for those who are blind or hearing impaired.

FIELD SELECTABLE ACTUATION

- Door Movement
- Exit Sense Bar
- Exit Device Switch Kit (See page 18.69)
- Latch Monitoring Strike (See page 18.69)

1,650 lbs. Holding Force Standard
830/450 mA @ 12/24VDC (single)

1,200 lbs. Energy Saver Option E
380/225 mA @ 12/24VDC (single)
Control more locks with fewer power supplies
Save on electricity consumption and power supply investment.

1511S

SINGLE MODEL

For use with single doors equipped with Exit Sense Bars, surface vertical rod, concealed vertical rod, mortise and rim mount exit devices, mortise locksets and cylindrical locksets.

Electrical Specifications

Voltage: Auto Voltage Sensing 12/24VDC ± 10%
Standard 1,650 lbs holding force:
 830/450 mA @ 12/24VDC
Energy Saver E Option 1,200 lbs. Holding Force:
 400/275 mA @ 12/24VDC

Mechanical Specifications

Single: 11" L x 2 3/4" H x 2 5/8" D
(279 L x 70 H x 67 D mm)


Armature: 7 3/8" L x 2 3/8" H x 9/16" D
(187 L x 60 H x 14 D mm)

Sign: 13" L x 4 1/2" H
(330 L x 114 H mm)

PUSH UNTIL ALARM SOUNDS. DOOR CAN BE OPENED IN 15 SECONDS.



1511S



- Voice & Digital Display Standard
- Energy Saver Optional

1511T

TANDEM MODEL

For use with pairs of doors equipped with Exit Sense Bars, surface mounted vertical rod exit devices and concealed vertical rod exit devices with surface mounted triggers and strikes.

Activating either door unlocks both doors.

Electrical Specifications

Voltage: Auto Voltage Sensing 12/24VDC ± 10%
Standard 1,650 lbs holding force:
 1500/850 mA @ 12/24VDC
Energy Saver E Option 1,200 lbs. Holding Force:
 650/400 mA @ 12/24VDC

Mechanical Specifications

Tandem: Master: 11" L x 2 3/4" H x 2 5/8" D
(279 L x 70 H x 67 D mm)
 Slave: 11" L x 2 3/4" H x 2 5/8" D
(279 L x 70 H x 67 D mm)


Armature: 7 3/8" L x 2 3/8" H x 9/16" D
(187 L x 60 H x 14 D mm)

Sign: 13" L x 4 1/2" H
(330 L x 114 H mm)

PUSH UNTIL ALARM SOUNDS. DOOR CAN BE OPENED IN 15 SECONDS.



1511T



"Security Industry Finest"
ISC Expo

DELAYED EGRESS OPERATION

NC	IBC, IFC, NFPA 101, NFPA 1-UFC, UBC, SBC Compliant Fixed 15 exit delay, 0/1 second nuisance delay Calif. Building Code OSHPD/Manual Power Up	N/C
ND	IBC, IFC, NFPA 101, NFPA 1-UFC, UBC, SBC Compliant Fixed 15 exit delay, 0/1 second nuisance delay	N/C
BC	BOCA National Building Code and Chicago Building Compliant 15 second fixed exit delay, 0 second nuisance delay, auto reset 30 seconds after door closure	N/C
BD	BOCA National Building Code 15 second fixed exit delay, 0/1 second nuisance delay, auto reset 30 seconds after door closure	N/C



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective October 1, 2012





FWAX Special Locking Arrangements
GWXT Auxiliary Locks

ANSI/BHMA A156.24
Grade 1



3774-0324:103



1581S

SDC PUSH UNTIL ALARM SOUNDS. DOOR CAN BE OPENED IN 15 SECONDS.

1581S	Single Mini Delayed Egress Lock 650 lbs. holding force. Current: 320/500 mA @ 24VDC/12VDC	900.00
	Specify 2 for pairs of doors Remote reset control required. See below. Lock size 10" L x 2" H x 2.375" D	

SPECIFY OPERATION

Specify **NC, ND, BC, BD**
see codes and description on page 14.54

SPECIFY FINISH

Add to List

Anodized Finishes

V	628 Clear Anodized Aluminum (standard)	N/C
Y	335 Black Anodized	80.00

Powder Coat Finishes

(a coating electrostatically applied to form a hard finish, that is tougher than conventional paint)

X	Dark Bronze Powder Coat Painted (313/613 Equal)	80.00	C	605 Bright Brass Powder Coat Painted	80.00
D	606 Dull Brass Powder Coat Painted	80.00			

Plated Finishes. Special order, no cancellations or returns

P	625 Bright Chrome	190.00	Q	626 Dull Chrome	190.00
----------	-------------------	---------------	----------	-----------------	---------------

SPECIFY OPTIONS

Add to List

D	Door position status	60.00
B	Magnetic bond sensor (Not an output. Low Holding Force. Put unit into alarm.)	100.00

TANDEM CABLE FOR PAIR OF DOORS

LIST

Required when using two locks on a pair of doors, cables enable slave operation.

1581S-TC-3	Cable kit for connecting two locks through the frame header	30.00
1581S-TC-10	Cable kit for connecting wiring for two locks in a remote junction box	40.00

SPECIFY RESET AND CONTROL DEVICE

LIST

Select Reset Station for NC and ND functions

918	EntryCheck™ digital keypad, 500 user codes Keyless Reset / manual power up / bypass	160.00
728	Key switch, 2 keys, 1 gang Reset / manual power up / sustained bypass	60.00
728L3	Key switch, 2 keys, 1 gang, LED status indicator Reset / manual power up / sustained bypass	84.00
702R	Separate wall mount reset key switch assembly MO SPDT dry contact, 6 Amp @ 30VDC max. Accepts standard 1-1/8" to 1-1/4" (Mortise key cylinder not included)	110.00
101-1AK	Key switch assembly, 2 gang, LED status indicator, less cylinder Reset / manual power up / sustained bypass	320.00
101-4AM	Four station remote annunciator	320.00



101 EXIT CHECK® WALL MOUNT DELAYED EGRESS - NFPA 101 LOCKING ARRANGEMENTS GKK



Proprietary Verbal Exit Instructions with Alarm Tone and 3/4" Digital Countdown Display



Standard features include: 12/24VDC voltage sensing input, delay electronics packaged on a 3-gang wall plate for recessed wall mounting or surface wall mounting with optional junction box. Features include: 15 second exit delay, 1 or 2 second nuisance delay. Keypad for violation reset, momentary bypass and on-off; Voice Annunciation and digital countdown display with door open indicator. Status and remote control inputs are standard.



"Security Industry Finest" ISC Expo

12VDC / 24VDC @ 200 mA Max.

- Doors **WITH** latch assemblies are sensor activated and do not require power transfer or trigger switch in exit device. Where preferred a trigger switch may be added to the exit device for manual activation in lieu of door movement activation.
- Doors **WITHOUT** latches require a non-latching Request-to-Exit Bar PSB560 Sure Exit® or MSB550 Switch Bar (see 17.68). Also compatible with standard EMLocks (see 12.48.)

Price List Effective October 1, 2012

14 - Delayed Egress Locks & Controllers



101-DE

DELAYED EGRESS CONTROLLER (1 per opening, single or pairs) LIST

101-DE	Wall mount controller with keypad control and reset, 200 mA @ 12/24 VDC	795.00
101-KDE	Wall mount controller with both key switch and keypad control and reset, 200 mA @ 12/24 VDC (Mortise cylinder not included)	900.00

For Operations see page 14.54 - Specify NC, ND, BC, BD



101-KDE

MAGNETIC LOCK WITH INTEGRATED ACTIVATION SENSOR LIST

Specify 2 for pair of doors

1511DEV	Single, 1650 lbs holding force, 670/350 mA @12/24 VDC	505.00
1571DEV	Single, 1200 lbs holding force Energy Saver, 250/125 mA @12/24 VDC	480.00
1581DEV	Single, 650 lbs holding force, 440/220 mA @12/24 VDC	400.00

Outdoor Locks

1575DEU	Single outdoor magnetic lock with magnetic bond sensor	480.00
1576DEU	Single face drilled outdoor magnetic lock with magnetic bond sensor	480.00
1576DE-ZB	Inswing mounting bracket for 1576DEU	150.00

MAGNETIC LOCK FINISH Add to List

V	628 Clear Anodized Aluminum (Standard)	N/C
Y	Black Anodized	Single 80.00

Powder Coat Finishes

(a coating electrostatically applied to form a hard finish, that is tougher than conventional paint)

X	Dark Bronze Powder Coat Painted (313/613 Equal)	Single 80.00
----------	---	---------------------

OPTIONAL MONITORING Add to List

B	Magnetic bond sensor, indicates locked with full holding force, low holding force, unlocked, tampering and obstructions. (1581DE SPST only)	60.00
D	Door position sensor, indicates door open and door closed. Commonly used to verify egress after alarm and exit delay activation. (D) Door position sensor not available with 1581, 1575 and 1576	40.00

OPTIONAL HARDWARE Add to List

101-1AK	Outdoor reset with LED and Audible annunciator. 2-gang outdoor box required (Interior 101-DE and 1575 or 1576 outdoor magnetic lock required)	320.00
DEC-J	3 Gang Interior surface mount box for 101-DE	90.00
SHD-J	Shroud for surface mount box DEC-J outdoor use	60.00

Mounting Kits & Angle Brackets - See page 12.50 through 12.51



SHD-J End View


SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com



101-DE with DEC-J



101-1AK



DEC-J



SHD-J with 101-DE



LOCAL AND REMOTE CONTROLS AND ANNUNCIATORS

LIST

14 - Delayed Egress Locks & Controllers



918 Keyless Reset and Bypass or Momentary Authorized Access 500 User Codes Keypad tamper lockout; Indoor blue backlit, moisture resistant keypad **160.00**



918 920 Keyless Reset and Bypass or Momentary Authorized Access 500 User Codes Heavy Cast Vandal Resistant Housing **175.00**



702R Separate wall mount reset key switch assembly MO SPDT dry contact, 6 Amp @ 30VDC max. Accepts standard 1-1/8" to 1-1/4" (*Mortise key cylinder not included*) **110.00**



702R 707R Remote reset key switch with dual function for Bypass (authorized egress) and reset (2) MO SPDT dry contact, 6Amp @ 30VDC max Accepts standard 1-1/8" to 1-1/4" mortise key cylinder. (*Mortise key cylinder not included*) **150.00**



707R 708R Remote reset key switch for bypass (on/off) and reset (1) Maintain (1) MO, SPDT dry contact, 6Amp @ 30VDC max Accepts standard 1-1/8" to 1-1/4" mortise key cylinder. (*Mortise key cylinder not included*) **150.00**



101-1A Remote or local single door annunciator with audible alarm and tricolor LED, 1 Gang
Green- Secure Amber - Egress initiated Red - Door unlocked **105.00**



101-4AM Remote four door annunciator with audible alarm mute button. Four tricolor LEDs, 2 Gang
Green- Secure Amber - Egress initiated Red - Door unlocked **320.00**

101-4AM



101-1AK Remote or local single door annunciator with 2 function key switch for on/off, reset, audible alarm and tricolor LED, 2 Gang
Green- Secure Amber - Egress initiated Red - Door unlocked
Accepts standard 1-1/8" to 1-1/4" mortise key cylinder. (*Mortise key cylinder not included*) **320.00**

101-1AK



101-PAM Remote single door annunciator with 3 push button switches for momentary access. On/off and audible alarm mute button with tricolor LED, 2 Gang
Green- Secure Amber - Egress initiated Red - Door unlocked
Recommended for remote installation only **320.00**

101-PAM



101-SP External 15 watt speaker connects directly to 1511S or 1511T for enhanced decibels onsite or remote voice message annunciation. Speaker driver may be provided by others for extreme decibel requirements. **36.00**

101-SP




101-SPSN Remote Single Gang Annunciator with speaker and 80db tone. Duplicates ExitCheck alternating voice message and tone. **96.00**

101-SPSN



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective October 1, 2012



The **SDC Exit Annunciator™** is a highly visible multi-color signal device, that interfaces with Delayed Egress or standard EMLocks, plus many other manufactures electromagnetic locks. and can be used as a wall, ceiling, or frame mount indicator.

Features

- Easy to install
- Suitable for retrofit or new construction
- Multi color LED technology
- Externally selectable color modes of Red, Green, Blue, White, Yellow and Purple
- Externally selectable Solid or Flashing Modes

Specifications

Dimensions:
8-5/8" x 1-1/2" x 3/4"


Electrical:
12/24 VDC @ 160mA
Long life LED output

Brand Compatibility



SDC	Schlage	RCI	Securiton
Rofu	Secolarm	Dynalock	Door King

EA100 Highly visible Annunciator Bar with multiple color LED light featuring rolling signals. **175.00**

Stand Alone Multi-Mount

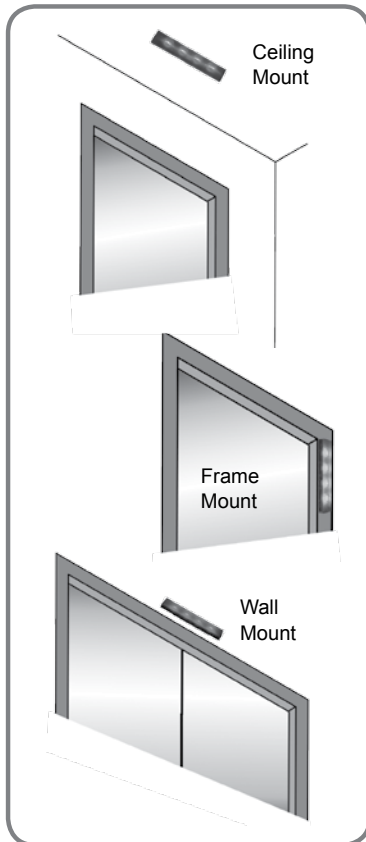

Typical Application

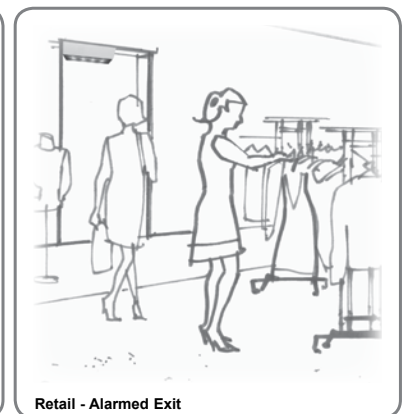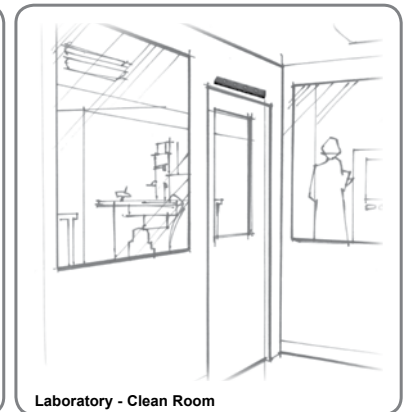




Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com



14 - Delayed Egress Locks & Controllers

Price List Effective October 1, 2012



EHBB



EHCP



EHDF



EHW



Extension Rods

LIST

Refer to Figure A to determine correct rod length for each individual openings installation and adjustability requirements

Model	Description	
EHR02	1/2" Extension Rod	20.00
EHR1	1" Extension Rod	20.00
EHR15	1-1/2" Extension Rod	24.00
EHR2	2" Extension Rod	30.00
EHR3	3" Extension Rod	30.00
EHR4	4" Extension Rod	40.00
EHR5	5" Extension Rod	50.00

Adjustable Extension Rod

LIST

Model	Description	
EHRA15	1-1/2" Adjustable Extension Rod	24.00
EHRA4	4" Adjustable Extension Rod	40.00

Specify Finish

Add to List

Finish	Description	
A	Chrome Powder Coat	N/C
P	625 Chrome Plated	P.O.A.
C	605 Brass Plated	12.00

Options & Accessories

LIST

Model	Description	
EHBB	Surface Back Box 2-25/32" x 4-7/8" x 1-1/2" (71mm x 124mm x 38mm) Supplied with EH30, EH40, EH42	40.00
EHCP	Catch Plate Replacement for the catch plate assembly	30.00
EHDF	Drilling Fixture Attach to door for quick and accurate hole location	200.00
EHW	Extension Wrenches Used to tighten extension rods to catch plate assembly	5.00

Specify Finish for Surface Back Box EHBB

Add to List

Finish	Description	
A	Chrome Powder Coat	N/C
P	625 Chrome Plated	P.O.A.
C	605 Brass Plated	36.00

How To Determine Extension Rod & Adjustable Rod Length

Extensions Rod Application: Refer to Fig. A for Aligned Catch Plate and Door Holder



Adjustable Rod Application: Refer to Fig. B for Misaligned Catch Plate and Door Holder

1. Hold door open at desired position.
2. Measure distance between door and wall.
3. Subtract below dimension indicated for door holder style

Flush Mount: Subtract 3" (76mm) from measured distance to determine minimum rod length.

Recessed Mount: Subtract 2-3/8" (60mm) from measured distance to determine minimum rod length.


Surface Mount: Subtract 4-5/8" (76mm) from measured distance to determine minimum rod length.






621 ACCESS CONTROL POWER SUPPLIES

Distributor Discount Code **NK**




621B



621P



621PJ



621J

2 Control Relays Standard

Features

- 12VDC or 24VDC field selectable output
- 1 Amp maximum, filtered and regulated output
 - 1 power limited or lock control relay output
 - 1 power limited unswitched access control output
- Two control inputs
 - 1 lock control trigger input, normally open (NO)
 - 1 supervised emergency release input (latching w/reset or non-latching)
- Short circuit and thermal overload protection
- Battery charger output

- Automatically switched to battery back-up when AC fails
- Board equipped with AC input, DC output and battery status LED indicator
- Enclosure equipped with AC input, DC output and battery status LED indicator

Dimensions

Power Supply Board: 3.95" W x 3" H x 1.625" D
 Enclosure: 7.25" W x 8.375" H x 3.625" D

MODEL		LIST
621PJ	Power supply module and cabinet, door mount LED system status indicator UL Listed 24VAC, 40 VA plug-in transformer	195.00
621J	Power supply module, cabinet with door mounted LED system status indicator	175.00
621P	Power supply module, retrofit mounting hardware includes flush mount standoffs or Velcro. UL Listed 24VAC, 40 VA plug-in transformer	140.00
621B	Power supply module only, retrofit mounting hardware includes flush mount standoffs or Velcro	120.00



RB12V4
4 Amp Hour



RB12V7
7 Amp Hour

Batteries

RB12V4	12V/4Ah Battery. 621PJ accommodates two.	40.00
RB12V7	12V/7Ah Battery. 621PJ accommodates one.	60.00



602RF(A)(L) and 631RF(A)(L) tested according to UL Standard 1481, listing includes:
Access Control Systems Unit ALVY Burglar Alarm Systems Power Supply APHV
Releasing Device Accessory SYSW Fire and Burglar Alarm Power Supply URTZ

632RF(A)(L) Access Control Systems Unit ALVY
632RF(A)(L), 634RF and 636RF UL listed as:
General Purpose QQFU/QQFU7 Power Supply



602RFL



631RFL



632RFL



602RF / 631RF



632RF


with optional power cord and 2 - CR4 modules



**631RFA
632RFA**



**634RF
636RF**



12VR

Standard Features:

- Modular design
- Filtered and regulated output
- Field selectable 12/24VDC
- Fire/Emergency release input
- Field selectable manual reset input (n/a with 631RF(A))



- Input, output and battery LED status indicators
- Thermal and short circuit protection with auto reset
- Battery charger
- Low battery disconnect

FIELD SELECTABLE 12VDC OR 24VDC OUTPUTS

LIST

602RFL	1 Amp, class 2 output, less box	210.00
602RF	1 Amp, class 2 output, 12" W x 12" H x 3.75" D box	260.00
602RFA	1 Amp, class 2 output, 16" W x 14" H x 6.5" D box	370.00
631RFL	1.5 Amp, class 2 output, less box	260.00
631RF	1.5 Amp, class 2 output, 12" W x 12" H x 3.75" D box	350.00
631RFA	1.5 Amp, class 2 output, 16" W x 14" H x 6.5" D box	420.00
632RFL	2 Amp, class 2 output, less box	310.00
632RF	2 Amp, class 2 output, 12" W x 12" H x 3.75" D box	400.00
632RFA	2 Amp, class 2 output, 16" W x 14" H x 6.5" D box	460.00
634RF	4 Amp, field select one 4 Amp output, or two 2 Amp class 2 outputs	600.00
636RF	6 Amp, field select one 6 Amp output, or three 2 Amp class 2 outputs	700.00

DUAL 12VDC AND 24VDC OUTPUT CAPABILITY

Add to List

12VR	500mA, 12VDC regulated and filtered output module With the power supply output set at 24VDC for locking devices and components, the addition of the 12VR provides a separate 12VDC 500 mA output for access controls or other 12VDC devices	50.00
-------------	--	--------------

OPTIONS

Add to List

MR	Cover mounted manual reset switch for Fire/Emergency release <i>(not available on 631RF)</i>	36.00
PS-1	System On-Off push switch inside power supply enclosure	36.00
PS-1A	System On-Off push switch on enclosure cover	36.00
14-2	7 day - skip a day programmable timer. Automatically unlocks and locks all doors or specific doors on programmed days only.	240.00
PC	6 ft. power cord. Recommended for 1 Amp and 1.5 Amp, eliminating the need for AC conduit	36.00
KL	Key lock cover	36.00
220V/230V	230VAC, 50/60Hz	N/C

Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com



16 - Power Supplies & Door Control Modules




MULTIPLE OUTPUT & DOOR CONTROL MODULE


Distributor Discount Code **NK**




PSM



UR-1




UR2-4



UR4-8



FB-4



ACM-1



CR4



PB-8



RB12V4

RB12V7

4 Amp Hour 7 Amp Hour

16.64

16 - Power Supplies & Door Control Modules

POWER SUPPLY MONITORING LIST

PSM	Power Supply Monitoring Module For remote monitoring of power supply AC input, DC output and battery backup On/Off status. 2 SPDT Relay Outputs, 1 Amp @ 12/24VDC	220.00
------------	--	---------------

UNIVERSAL CONTROLLER & MANTRAP MODULES LIST

UR-1	Universal Controller for up to 2 doors. 12 Selectable Relay & System Logic Modes. 2 form "A" SPST, N.O. Inputs, 2 form "C" SPST outputs 5 Amps, 12/24 @ 120/175mA.	96.00
UR2-4	Universal Controller for 2 doors. Field select TD, LR, TD/LR, mantrap A, B, C interlock. Two fused SPDT outputs, 5 Amp @ 30VDC. Two SPDT outputs, 5 Amp @ 30VDC. Two inputs per station, four auxiliary inputs.	220.00
UR4-8	Universal Controller for 4 doors. Field select TD, LR, CR, TD/LR, mantrap A, B interlock. Four fused SPDT outputs, 5 Amp @ 30VDC. Four SPDT outputs, 5 Amp @ 30VDC. Two inputs per station, four auxiliary inputs.	310.00

DOOR CONTROL MODULES LIST

Modules may be ordered with or without power supplies. Different function modules may be used in the same power supply or cabinet. Contacts: 2.5 Amps inductive, 5 Amps resistive @ 30VDC unless specified otherwise.

FB-4	Fused terminal board. 4 individually fused outputs	40.00
ACM-1	Access Control Module. One SPDT voltage output, one SPDT status output, eight trigger inputs, (3N/C, 3N/O), LED status indicator.	90.00
CR4	Control Board with four relays. Four fused SPDT field selectable wet or dry outputs, four non-fused SPDT outputs, 2 Amps @ 30VDC, four dry contact trigger inputs.	165.00
PB-8	Power booster for high inrush electric panic devices and locks. 1 Amp continuous @ 24VDC, 8 Amp surge output.	120.00
PB-16	Power booster for high inrush electric panic devices and locks. 1 Amp continuous @ 24VDC, 16 Amp surge output.	150.00

EXIT DEVICE SEQUENCER LIST

EMC	Sequencer Module required for pair of doors and automatic doors. 12/24 VDC For use with SDC 602RF and 632RF Power Supplies.	150.00
------------	---	---------------

BATTERIES LIST

RB12V4	12V/4Ah Battery. Specify in pairs for 24V. 600RF accommodates four.	40.00
RB12V7	12V/7Ah Battery. Specify in pairs for 24V. 600RFA accommodates six	60.00

Cabinet Control Module Capacity

	Number of Batteries	ACM-1	CR	CR-4	FB-4	LR	PB	TD	UR	PSM
12x12	0-2	2	4	2	4	4	2	4	0	1
	3-4	1	2	1	2	2	2	2	0	1
16x14	0-2	4	8	4	4	8	6	8	2	1
	3-6	2	6	2	2	4	4	4	1	1



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012



DC Regulated Power Supplies



Distributor
Discount Code V

LIST



TR12 1 Amp 12VDC Regulated Plug-In Power Supply

72.00

- Thermal overload protection
- LED Power status indicator
- Secondary connection: Screw terminals
- Primary Input: 120VAC
- UL Listed, Class 2



TR24 1 Amp 24VDC Regulated Plug-In Power Supply

74.00

- Thermal overload protection
- Secondary connection: 6ft wire leads
- Primary Input: 120VAC
- UL Listed, Class 2

Price List Effective October 1, 2012



TRANSFORMERS



Distributor
Discount Code V

LIST



FB4DC AC to 4 DC Fused Output Module. One (1) AC input, 12 or 24VAC 4.2 Amp max. Four (4) Fused DC outputs (4) Fuses, 2 Amps. Combined load of all outputs 4.2 Amps max.

60.00

- Onboard, 4-way bridge rectifier converts AC input to DC output. 4 retrofit PCB standoffs.
- Compatible SDC transformers: TJ2440, TP2420, TP2440, TB2475
- Transformers by others: 12VAC @ 50VA (4.2 Amps); 24VAC @ 100VA (4.2 Amps)
- Dimensions: 3.25 x 2" (83 x 51mm)



TP1220 1.6 Amp 12VAC Plug-In Transformer

20.00


- Thermal overload protection
- Secondary connection: Screw terminals
- Thermal overload protection
- Primary Input: 120VAC
- UL Listed, Class 2



TP2440 1.6 Amp 24VAC Plug-In Transformer

20.00

- Thermal overload protection
- Secondary connection: Screw terminals
- Thermal overload protection
- Primary Input: 120VAC
- UL Listed, Class 2



TJ2440 1.6 Amp 24VAC Transformer, Foot Plate or Knockout Mount

46.00

- Includes 4 x 4 inch mounting plate for 2 x 4 inch or 4 x 4 inch outlet box, mounting feet for surface mount., clamp for outlet box knockout
- Secondary connection: Screw terminals
- Primary Input: 120VAC, wire leads
- UL Listed, Class 2



TB2450 2 Amp 24VAC Transformer, Foot Plate or Hub Mounted

60.00

- Push button reset circuit breaker protection
- Secondary connection: 9" wire leads
- Primary Input: 120VAC/240VAC, 9" wire leads x hub
- UL Listed, Class 2



BR64XL Bridge Rectifier, 6" wire leads. Converts AC transformer output to DC

25.00

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com



POWER SUPPLY CAPACITY CHART

EMLOCK ELECTROMAGNETIC LOCKS	VOLTS	AMPS	602RF 621 1 AMP	631RF 631RFA 1.5 AMP	632RF 632RFA 2 AMP	634RF 4 AMP	636RF 6 AMP
1511 SINGLE	12VDC 24VDC	.70A .35A	1 2	2 4	2 5	5 11	8 17
1512 DOUBLE	12VDC 24VDC	1.40A .70A	0 1	1 2	1 2	3 5	4 8
1561, 1562	12VDC 24VDC	.65A .35A	1 2	2 4	3 5	6 11	9 17
1565, 1566	12VDC 24VDC	.80A .40A	1 2	1 3	2 5	5 10	7 15
1571 ENERGY SAVER	12VDC 24VDC	.25A .125A	4 8	6 12	8 16	16 31	24 48
1572 ENERGY SAVER	12VDC 24VDC	.50A .25A	2 4	3 6	4 8	8 16	12 24
1575, 1576	12VDC 24VDC	.45A .225A	2 4	3 6	4 8	8 16	12 24
1581 SINGLE	12VDC 24VDC	.44A .22A	2 4	3 6	4 6	9 18	13 27
1582 DOUBLE	12VDC 24VDC	.88A .44A	1 2	1 3	2 4	4 9	6 13
EXIT CHECK INTEGRATED DELAYED EGRESS EMLOCKS							
1581S	12VDC 24VDC	.50A .32A	2 3	3 4	4 6	8 11	12 18
1511S	12VDC 24VDC	.83A .45A	1 2	1 3	2 4	4 8	6 12
1511T	12VDC 24VDC	1.56A .92A	0 1	0 1	1 2	2 4	3 6
1511S With (E) Energy Saver Option	12VDC 24VDC	.40A .275A	2 3	3 5	5 7	10 14	15 21
1511T With (E) Energy Saver Option	12VDC 24VDC	.65A .40A	1 2	2 3	4 5	6 10	9 15
EXIT CHECK EMLOCK WITH WALL MOUNT CONTROLLER							
101-DE x 1511DE	12VDC 24VDC	.85A .53A	1 1	1 2	2 3	4 7	7 11
ENERGY SAVER 101-DE x 1571DE	12VDC 24VDC	.43A .31A	2 3	3 4	4 6	9 12	13 19
101-DE x 1581DE	12VDC 24VDC	.62A .40A	1 2	2 3	3 5	6 10	9 15



POWER SUPPLY CAPACITY CHART (continued)

HITOWER ELECTRIC LOCKS	VOLTS	AMPS	602RF 621 1 AMP	631RF 631RFA 1.5 AMP	632RF 632RFA 2 AMP	634RF 4 AMP	636RF 6 AMP
7200	12VDC 24VDC	.60A .30A	1 2	2 5	3 6	6 13	10 21
7500 FAIL SAFE	24VDC	.50A	2	3	4	8	12
7500 FAIL SECURE	24VDC	.80A	1	1	3	5	7
7800	12VDC 24VDC	.60A .30A	1 2	2 5	3 6	6 13	10 20
SPACESAVER ELECTRIC BOLT LOCKS							
100,1000, FS	12VDC 24VDC	.90A .45A	1 2	1 3	2 4	4 8	6 12
1100	24VDC	.50A	2	3	4	8	12
1200	12VDC 24VDC	.90A .45A	1 2	1 3	2 4	4 8	6 12
2000	24VDC	2.5A InRush .4A Cont.	1 1X-PB	*2 1XPB-8	*4 2XPB-8	*6 3XPB-8	*8 4XPB-8
ELECTRIC STRIKES							
15	12VDC	.20A	4	7	10	20	30
25	12VDC 24VDC	.30A .15A	3 6	5 10	6 13	13 26	20 40
30	12VDC 24VDC	.51A .25A	1 4	2 6	3 8	7 16	11 24
45	12VDC 24VDC	.28A .14A	3 6	5 10	6 13	13 26	20 40
EXIT DEVICES							
E Electric Latch Retraction with 1 EMC Sequencer with 2 EMC Sequencers	24VDC	.5A	2 2	2 2	4 4	8	12
B Exit Alarm	12VDC 24VDC	.100A .100A	10 10				
M Electric Mortise Device	12VDC 24VDC	.6A .3A	1 3	2 5	3 6	6 13	10 20

Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com





Distributor Discount Code

SURE EXIT® SENSE BAR DKK

PUSH TO EXIT

Field Applied Sign with green letters



UL US Listed 4J82

Access Control System Units
Burglary Resistant Electronic Locking Mechanism



3773-0324:105



"Security Industry Finest"
ISC Expo

Standard Features

Actuation: Pressure Sense Technology; Tri-Failsafe

Voltage: 12/24VDC Voltage Sense Input

Current: 20 mA at Rest, 115 mA Active

Lock Output: SPDT, 3 Amp @ 30VDC

Alarm Shunt/Status Output: SPDT, 3 Amp @ 30VDC


Accessories Include: 10 ft. cable and connector; PT-2U Armored Power Transfer Loop

Standard length, 36"

MODEL	FINISH	LIST PRICE
PSB560V	628 Aluminum Anodized	350.00
PSB560Y	Black Anodized	350.00
PSB560C	605 Bright Brass	475.00
PSB560S	629 Bright Stainless Steel	475.00
PSB560U	630 Brushed Stainless Steel	475.00

Bars for wide doors

42	Bar for 42" Door. May be field cut.	N/C
48	Bar for 48" Door. May be field cut Ex: PSB560V-42	N/C



PT-2U
(Included with bar)




PT3


ACCESSORIES

		LIST
500GL-KIT	One glass door mounting kit with adhesive for eight to ten bars	235.00
500GL-MB	One glass door mounting kit without adhesive	130.00
500-SK	Shim kit used to raise bar from door. Recommended for wood or hollow metal doors with uneven mounting surface.	24.00
Power Transfer:		
PT-3V	Stainless steel armored loop with aluminum surface wire junction box	45.00


Standard Installation with standard mounting hardware




500GL Kit Glass Mount Installation



1. Assemble kit



2. Apply Adhesive



3. Mount



Distributor Discount Code

EXIT MECHANICAL SWITCH DK

PUSH TO EXIT

Field Applied Sign with green letters



UL US Listed 4J82

Access Control System Units
Burglary Resistant Electronic Locking Mechanism



3773-0324:106

Standard Features

Actuation: 1/8" total bar movement for mechanical switch actuation

Contact: SPDT, 5 Amp @ 30VDC (2nd switch optional)

Accessories include: PT-2U Power Transfer Loop

Standard length, 36"

MODEL	FINISH	LIST PRICE
MSB550V	628 Aluminum Anodized	225.00
MSB550Y	335 Black Anodized	225.00
MSB550C	605 Bright Brass	360.00
MSB550S	629 Bright Stainless Steel	360.00
MSB550U	630 Brushed Stainless Steel	360.00

2 SPDT Contacts

ADD 30.00

Add "2" for 2nd mechanical switch for dual-failsafe redundant operation; alarm shunt; or monitoring output. Ex: MSB550-2V

Bars for wide doors

42	Bar for 42" Door. May be field cut.	N/C
48	Bar for 48" Door. May be field cut Ex: MSB550V-42	N/C



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdgsecurity.com • www.sdgsecurity.com

Price List Effective October 1, 2012



EXIT DEVICE SWITCH KITS

Distributor Discount Code **DK**

APPLICATION

- Activation of delayed egress locks
- Request-to-Exit
- Electromagnetic Lock Release
- Alarm Shunt or Alarm Activation



SWITCH KITS

LIST

Switch Kits are field installed in the inactive hinge pad of an exit device to provide instantaneous release of EmLocks for egress. All kits include a SPDT Switch Assembly with wire leads. 5 Amp @ 30VDC.



00510



00511



00512



00514



00516



00517



00518



00519



00525



00527



00528

MODEL	MAKE & MODEL TO BE MODIFIED	
00510	Von Duprin 33, 35, 98, 99	150.00
00510-2	Von Duprin 33, 35, 98, 99 DPDT	185.00
00511	Von Duprin 55	150.00
00512	Von Duprin 88	150.00
00514	Dor-O-Matic 990, 1090, 1990, 2090	150.00
00515	Sargent 9300, 9400, 9500	150.00
00516	Sargent 9600, 9700, 9800, 9900	150.00
00517	Adams Rite 8300, 8400, 8700, 8800	150.00
00518	Precision Series 1100	150.00
00518A	Precision Apex Series (2100 - 2800)	150.00
00519	Jackson 1095	150.00
00519-2	Jackson 1095 DPDT	185.00
00520	Corbin 3000	150.00
00521	Corbin 7000	150.00

MODEL	MAKE & MODEL TO BE MODIFIED	
00525	Monarch 18 and 19	150.00
00525-2	Monarch 18 and 19	185.00
00526	Corbin ED8200	150.00
00527	Sargent 80, Arrow S3800/S1250	150.00
00527-2	Sargent 80 DPDT	185.00
00528	Sargent 20/60 and Yale 2100	150.00
00531	Yale 7000 (Dogging mechanism required) Corbin 4000/5000	150.00
00535	Kawneer Mid Panel Line Dor-O-Matic 1390	150.00
00536	Jackson 1295	150.00
00539	Cal Royal 9800 Series	150.00
00542	Hager 4700	150.00
00590	Dor-O-Matic 1690	150.00

NOTE: Consult factory for Exit Device Switch Kits not shown. Modification of any kind to a UL Listed device may void UL Listing.




LATCH AND DEADBOLT MONITORING STRIKE KITS

Distributor Discount Code **DK**

List

Provides latch and or deadbolt position status. Compatible with deadbolts, cylindrical locks, mortise locks, and mortise locks with latch and deadbolt. Strike plates shown provided by others.



MS-12



MS-14



MS-16



MS-20

5 Amp @ 30 VAC/DC

MS-12	Cylindrical latch monitor 2-3/4" SPDT	130.00
MS-12D	Cylindrical latch monitor 2-3/4" DPDT	160.00
MS-14	Cylindrical latch monitor 4-7/8" SPDT	130.00
MS-14D	Cylindrical latch monitor 4-7/8" DPDT	160.00
MS-16	Mortise lock latch monitor SPDT	130.00
MS-16D	Mortise lock latch monitor DPDT	160.00
MS-18	Mortise lock deadbolt monitor SPDT	130.00
MS-18D	Mortise lock deadbolt monitor DPDT	170.00
MS-20*	Mortise lock latch and deadbolt monitor SPDT	160.00
MS-20D*	Mortise lock latch and deadbolt monitor DPDT	215.00

*MS-20 and MS-20D are handed but reversible



KEY SWITCHES

Distributor Discount Code **CK**

Key Cylinder sold separately: **MO** - Momentary **AA** - Alternate Action (on-off)
 Key switch assemblies compatible with 1.125" and 1.25" U.S. standard mortise cylinders (not included).

6 AMP KEY SWITCH ASSEMBLIES




700 700N 700T



700-L2 700T-SN-L2

See Options below

20 Gauge Stainless Steel Faceplate				Contacts	
1 Gang	Narrow	List	2 Gang	List	
701	701N	95.00	701T	120.00	AA SPDT
702	702N	95.00	702T	120.00	MO SPDT
704	704N	170.00	704T	190.00	1-60 Timer SPDT
705	705N	110.00	705T	130.00	AA DPDT
706	706N	105.00	706T	125.00	MO DPDT
707	707N	125.00	707T	145.00	2 MO SPDT
708	708N	130.00	708T	150.00	1 MO SPDT & 1 AA SPDT
709	709N	140.00	709T	160.00	2 AA SPDT
710	710N	190.00	710T	215.00	1-60 Timer & AA SPDT
711	711N	145.00	711T	165.00	2 MO DPDT
712	712N	145.00	712T	165.00	1 MO DPDT & 1 AA DPDT
713	713N	145.00	713T	165.00	2 AA DPDT



800 800N

1/4" Thick Aluminum Plate			Contacts	
1 Gang	Narrow	List		
801AL	801ALN	140.00		AA SPDT
802AL	802ALN	140.00		MO SPDT
804AL	804ALN	215.00		1-60 Timer SPDT
805AL	805ALN	160.00		AA DPDT
806AL	806ALN	160.00		MO DPDT
807AL	807ALN	180.00		2 MO SPDT
808AL	808ALN	180.00		1 MO SPDT & 1 AA SPDT
809AL	809ALN	180.00		2 AA SPDT
810AL	810ALN	255.00		1-60 Timer & AA SPDT
811AL	811ALN	205.00		2 MO DPDT
812AL	812ALN	205.00		1 MO DPDT & 1 AA DPDT
813AL	813ALN	205.00		2 AA DPDT



10TD

SPECIFY FINISH

Add to List

U	630 Dull Stainless Steel (Standard For All Key Switches Except The 800AL)			N/C
AL	628 Anodized Aluminum (Standard For The 800AL Key Switch Only)			N/C
Plated finishes, special order, no cancellation, no return				
C	605 Bright Brass	40.00	H	613 Oil Rubbed Bronze 40.00
D	606 Dull Brass	40.00	P	625 Bright Chrome 40.00

OPTIONS

Add to List

10TD	Mini timer, adj. 1-60 second 12/24VDC, SPDT	80.00	LT	One tricolor LED. Red, green and amber	30.00
CYL-KD	1 1/8" Key cylinder with 2 keys (keyed differently)	25.00	ATS	Anti-tamper sensor, SPDT	30.00
L1	One LED. Specify red or green	20.00	RMB	Buzzer, 12 or 24VDC, 20mA	40.00
L2	Two LEDs. Red, and green	30.00	SN	85 db siren, 4V-25VDC, 15mA	50.00

RETROFIT BACK BOX

BB1D	Single Gang 2.25" w x 3.75" h x 2.75" D	12.00
-------------	---	-------



BB1D





SECURITY DOOR CONTROLS

801 Avenida Acaso • Camarillo, CA 93012

Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012



EXIT SWITCHES

Distributor Discount Code **CK**

410 SERIES - 1-3/4" x 1" EXIT SWITCH

OPTIONS - See 20.73

Distributor Discount Code

CK List

1 3/4" x 1" Button - Green and Red Illuminated Lens included - Dull Stainless Steel finish

Narrow	Contact	Sign	
412NU	Momentary SPDT	PUSH TO EXIT	70.00
413NU	Integrated electronic timer, adj. 1-60 sec. 12/24VDC, 2A SPDT Contact	PUSH TO EXIT	135.00
413PNU	Integrated pneumatic timer, adj. 1-180 sec. 12/24VDC, SPDT 3 Amp Contact	PUSH TO EXIT	320.00
414NU	Momentary DPDT	PUSH TO EXIT	85.00
415NU	AA (On/Off) DPDT	NONE	105.00



412N
413N
414N

420 SERIES - 2" EXIT SWITCH

OPTIONS - See 20.73

Distributor Discount Code

CK List

2" Button, Green and Red Illuminated Lens included - Dull Stainless Steel Finish

1 Gang	Contact	Sign	
422U	Momentary SPDT	PUSH TO EXIT	70.00
422AU	Momentary SPDT	♿ Symbol	70.00
423U	Integrated electronic timer, adj. 1-60 sec. 12/24VDC, 2A SPDT Contact	PUSH TO EXIT	135.00
423PU	Integrated pneumatic timer, adj. 1-180 sec. 12/24VDC, SPDT 3 Amp Contact	PUSH TO EXIT	320.00
423AU	Integrated 1-60 sec Timer 12/24VDC, 2A DPST Contact 2" Button - Blue illuminated lens only	♿ Symbol	135.00
424U	Momentary DPDT	PUSH TO EXIT	105.00
425U	AA (On/Off) DPDT	NONE	105.00



422
423
424



422A
423A

CODE COMPLIANT MANUAL RELEASE DEVICES

Distributor Discount Code

CK List

Code Compliant Manual Releasing Devices and Sensors

423M and 413MN exit switches USED TOGETHER WITH the MD31D PIR sensor comply with manual releasing device and sensor device requirements for Access-Controlled Egress Doors per:

IBC International Code 1008.1.3.4 NFPA 101 7.2.1.62 BOCA National Building Code 1017.4.5
IFC International Code 1008.1.3.4 NFPA 1 15.5.3.2 SBCCI Standard Building Code 1012.7

Code Compliant Manual Release Device

Code Compliant Features: Fixed 30 second timer, re-triggerable; Failsafe - lock releases when power to switch is interrupted; Sign - PUSH TO EXIT; CSFM Listed;

1 3/4"x1" Button, Green Illuminated Lens - Dull Stainless Steel Finish, Specify R for optional red lens

Narrow	Contact	Sign	
413MNU	Integrated Fixed 30 sec. Timer 12/24VDC, 2 Amp Contact	PUSH TO EXIT	140.00

2" Button, Green Illuminated Lens - Dull Stainless Steel Finish, Specify R for optional red lens

1 Gang	Contact	Sign	
423MU	Integrated Fixed 30 sec. Timer 12/24VDC, 2 Amp Contact	PUSH TO EXIT	140.00

Code Compliant Egress Sensor

Code Compliant Features: PIR egress sensor with failsafe mode - lock releases when power to PIR sensor is interrupted. UL listed 294 Access Control System Units

Model	Color		
MD-31DOW	White	PIR Egress Sensor	V 235.00
MD-31DB	Black	PIR Egress Sensor	V 235.00

Input: 12 or 24 VAC/DC @ 26mA max.

Contact: 2 SPDT Dry, 2 Amp @ 30VDC (38.1 H x 148.8 W x 38.1 D mm)

Operating temp: -20° F to 120° F (-29° C to 49° C)

Dimensions: 1.5" H x 6.25" W x 1.5" D



413MN



423M



MD-31DOW



MD-31DB



BB1D

RETROFIT BACK BOX

BB1D	Single Gang 2.25" w x 3.75" h x 2.75" D	12.00
-------------	---	--------------



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdgsecurity.com • www.sdgsecurity.com

Price List Effective October 1, 2012



430 430N

430 SERIES - 1-1/2" MUSHROOM EXIT SWITCH

Distributor Discount Code **CK** **List**

1.5" Mushroom, Green Button Standard, Dull Stainless Steel Finish, Specify R For Optional Red Button

1 Gang	Narrow	2 Gang	Contact	Sign	
431CU	431CNU		AA (On/Off) NC SPST	none	110.00
431OU	431ONU		AA (On/Off) NO SPST	none	110.00
432CU	432CNU		Momentary NC SPST	EXIT	110.00
432OU	432ONU		Momentary NO SPST	EXIT	110.00
432KUR	432KNUR		Latching/ key reset DPST, Red	none	215.00
		433U	Momentary with Timer Module 1-60 sec. 12/24V AC/DC SPDT 2A Contact	EXIT	205.00
434U	434NU		Momentary DPST	EXIT	135.00
435U	435NU		AA (On/Off) DPST	none	135.00



441 - 444 446

440 SERIES - 2-5/8" MUSHROOM EXIT & PANIC SWITCHES

Distributor Discount Code **CK** **List**

2-5/8" Mushroom, Red Button Standard, Dull Stainless Steel Finish, Specify G For Optional Green Button

1 Gang	2 Gang	Contact	Sign	
	441U	AA (On/Off) DPST	none	190.00
	442U	Momentary DPST	EXIT	190.00
	443U	Momentary with Timer Module 1-60 sec. 12/24V AC/DC SPDT 2A Contact	EXIT	275.00
	444U	Momentary 2-DPST	EXIT	210.00
446U		Momentary DPST	EXIT	125.00




451 451N
452 452N
453 453N

450 SERIES - VANDAL RESISTANT ALUMINUM EXIT SWITCH

Distributor Discount Code **CK** **List**

Stainless Steel Button - 1/4" Thick Aluminum Plate - Security Screws - Plated Finish Not Available

1 Gang	Narrow	Contact	Sign	
451V	451NV	AA (On/Off) SPDT	none	150.00
452V	452NV	Momentary SPDT	none	150.00
453PV	453PNV	Integrated Pneumatic Timer ADJ. 1-180 sec. SPDT contact	none	425.00



463 463N

463 SERIES - VANDAL RESISTANT STAINLESS STEEL EXIT SWITCH

Distributor Discount Code **CK** **List**

Piezoelectric Stainless Steel Button - No moving parts - Integrated Time Delay - Red and Green Status Indicators 2mm Stainless Steel - Security Screws - Plated Finish Not Available

1 Gang	Narrow	Contact	Sign	
463U	463NU	Integrated 1-30 Sec Timer 12/24VDC, NO/NC 2A Contact	PUSH TO EXIT	130.00



474

470 SERIES - SANITARY, NO TOUCH, WAVE-TO-EXIT SWITCH

Distributor Discount Code **CK** **List**

• IR Sensor, 4" read range, Red, Green illuminated LED status. Control electric locks, strikes and automatic door operators.
 • Entry/exit for sanitary environments including: bathrooms, hospitals, schools, cleanrooms, food processing, labs, or offices.
 • Output: DPDT 3 Amp Dry Contact • Input: 25mA (standby); 55mA (active) @ 12/24VDC • Faceplate: 20ga stainless steel

	Contact	Sign	
474U	DPDT	No Touch Exit	75.00
474DU	DPDT	No Touch Exit	130.00



474D

OPTIONS AND FINISHES

Distributor Discount Code **CK** **Add to List**

Options for 410, 420, 430, 440 Series

L1G	1 Green LED	20.00	LT	Tricolor LED - Red, Green, Amber	30.00
L1R	1 Red LED	20.00	E	Add Exit sign To AA Function Switch Only	10.00
L2	1 Red and 1 Green LED	30.00	B	No Exit sign (None) with Momentary Switch	N/C

Special Finish

450 / 460 / 470 Special finish is not available

Designate special finish suffix from below in lieu of U (stainless steel) in part number.

C	605 Bright Brass	D	606 Dull Brass	40.00
P	625 Bright Chrome	H	613 Oil Rubbed Bronze	40.00



480 SERIES PUSH PLATE SWITCHES - WIRELESS AND HARDWIRED

Distributor Discount Code **CK List**

For Handicap Access, Automatic Door Activation & Request-to-Exit Applications

- Door Opener Activation
- Access Control Request-to-Exit (RTE)
- Automatic Door Activation
- Door Sequencer Activation

FEATURES

Mounting Plate: Heavy Duty 1/8" (3.2mm) mounting plate

Faceplate: Heavy 18 Gauge (1.02mm), 630/US32D Satin Stainless Steel Standard

Legends: Bold debossing or engraving with black, blue or white infill

Contacts: SPDT or DPDT, 15 Amps @ 125/250VAC; UL 1054, CSA Listed

Depth: [Narrow & (1) Gang] SPDT-7/8" deep, DPDT-1-3/8" deep, [4 1/2", & 6" square/ round] SPDT-3/4" deep, DPDT-1-5/32 deep



= can be used with wireless transmitter and receiver



20 - Exit Switches



1-11/16" Narrow Mullion Push Plate Switch – Recessed, Surface Box or Bollard Mount

SPDT Model	Description	DPDT Model	Description		
482O1U	Push to Open, black infill	62.00	484O1U	Push to Open, black infill	86.00
482A1U	♿ Push to Open, blue infill	62.00	484A1U	♿ Push to Open, blue infill	86.00
400-1B	Narrow Mullion Surface Box, 1-3/4" x 4-9/16" x 1-3/4" O.D.			18.00	

2 3/4" x 4 1/2" Single (1) Gang Push Plate Switch

- Pressing any part of the push plate (2 3/4" x 4 1/2") causes switch actuation
- Recessed, Surface Box or Bollard Mount
- Depth: SPDT - 3/4" deep; DPDT - 1 1/2" deep

SPDT Model	Description	DPDT Model	Description		
482O2U	Push to Open, black infill	74.00	484O2U	Push to Open, black infill	98.00
482A2U	♿ Push to Open, blue infill	74.00	484A2U	♿ Push to Open, blue infill	98.00
480-2SB	Surface mount box, 2 3/4" x 4 1/2" x 1 5/8" O.D.			28.00	

4 1/2" x 4 1/2" Square Push Plate Switches

- Pressing any part of the push plates 4" 1/2" x 4 1/2" active area causes switch actuation
- 1 Gang or 2 gang recessed or Surface Box Mount
- Depth: SPDT 5/8" deep; DPDT 1 1/2" deep

SPDT Model	Description	DPDT Model	Description		
482O4U	Push to Open, black infill	82.00	484O4U	Push to Open, black infill	106.00
482A4U	♿ Push to Open, blue infill	82.00	484A4U	♿ Push to Open, blue infill	106.00
480-4FB	Square Flush Recessed box, 1-gang, 6 3/4" x 6 3/4" x 1 7/8" O.D.			60.00	
480-4SBB	Surface mount box, 4-1/2" x 4-1/2" x 1 3/4" O.D. with Battery compartment for wireless			31.00	
480-4SB	Surface mount box, 4-1/2" x 4-1/2" x 1 7/8" O.D.			60.00	
480-4SE	3-sided stainless shroud for exterior applications, 4-11/16" x 4-7/8" x 12"			36.00	

6" x 6" Square Push Plate Switch

- Pressing any part of the push plates 6" x 6" active area causes switch actuation
- 1 Gang or 2 gang recessed or Surface Box Mount
- Depth: SPDT 5/8" deep; DPDT 1 1/2" deep

SPDT Model	Description	DPDT Model	Description		
482O6U	Push to Open, black infill	86.00	484O6U	Push to Open, black infill	110.00
482A6U	♿ Push to Open, blue infill	86.00	484A6U	♿ Push to Open, blue infill	110.00
480-6SBB	Surface mount box, 2-gang Battery Compartment, 4 1/2" x 4 1/2" x 1 3/4" O.D.			31.00	

4 1/2" Round Push Plate Switch

- Pressing any part of the push plates 4" 1/2" active area causes switch actuation
- 1 Gang or 2 gang recessed or Surface Box Mount
- Depth: SPDT 5/8" deep; DPDT 1 1/2" deep

SPDT Model	Description	DPDT Model	Description		
482O4RU	Push to Open, black infill	82.00	484O4RU	Push to Open, black infill	106.00
482A4RU	♿ Push to Open, blue infill	82.00	484A4RU	♿ Push to Open, blue infill	106.00
480-4RSB	Surface box, 5" Dia., 2 1/8" O.D.			54.00	
480-4RFB	Black Flush Escutcheon, 5 7/8" overall diameter with trim ring			60.00	
480-4RG	4" round gasket			14.00	
480-4RRB	Surface Escutcheon, 7 7/8" Dia., 1 9/16" overall height			60.00	

6" Round Push Plate Switch

- Pressing any part of the push plates 6" active area causes switch actuation
- 1 Gang or 2 gang recessed or Surface Box Mount
- Depth: SPDT 5/8" deep; DPDT 1 1/2" deep

SPDT Model	Description	DPDT Model	Description		
482O6RU	Push to Open, black infill	86.00	484O6RU	Push to Open, black infill	110.00
482A6RU	♿ Push to Open, blue infill	86.00	484A6RU	♿ Push to Open, blue infill	110.00
480-6RSB	Surface box Round, 6 7/16" Dia., 2 1/8" O.D.			54.00	
480-6RFB	Recessed Flush Escutcheon, 7 3/4" overall diameter with trim ring			60.00	
480-6RG	6" round gasket			14.00	



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdgsecurity.com • www.sdgsecurity.com

Price List Effective October 1, 2012



480 SERIES TOUCH PANEL COLUMN - WIRELESS & HARDWIRE

Distributor Discount Code **CK**

Applications

- Wireless & Hardwire
- ADA Ingress/R.E.X/Egress Door Opener Activation
- Access Control Request-to-Exit (REX)
- Door Opener Activation
- Automatic Door Activation or Lock Release
- Automatic Door & Exit Device Sequencer Activation



= can be used with wireless transmitter and receiver



Features

- Surface wall mount or bollard mount
- Sleek Architectural profile
- No square edges to snag, wide sloping sides deflects impact movement naturally to activate column
- Deflects impact from wheeled carts and conveyances
- Impact & Vandal resistant design, inhibits prying, tampering
- Weather Resistant, no gaps for water or ice penetration
- Choice of SPDT or DPDT, 15 Amps @ 125/250VAC



9" X 6" INGRESS-R.E.X TOUCH PANEL COLUMN

List

Fully Active 22-1/2 Sq. Inch Actuation Area
Recommended Centerline mounting height 34" to 48"

Material: Sturdy 1/8" extrusion with architectural finish
Overall Size: 9" h x 6" w x 1-1/2" d (229 x 152 x 38mm)
Active Area: 9" h x 2-1/2" w (229 x 63.5mm)

SPDT Model	Description	DPDT Model	Description
482AA9	Push to Open	282.00	484AA9 Push to Open
			297.00

SPECIFY FINISH

Add to List

V 628 Aluminum (standard), blue infill	N/C	X 613 Dark Bronze, white infill	24.00
--	-----	---------------------------------	-------



36" X 6" INGRESS-R.E.X TOUCH PANEL COLUMN

List

Fully Active 90 Sq. Inch Actuation Area
Recommended mounting height is 3" from floor

Material: Sturdy 1/8" extrusion with architectural finish
Overall Size: 36" h x 6" w x 1-1/2" d (914 x 152 x 38mm)
Active Area: 36" h x 2-1/2" w (914 x 63.5mm)

SPDT Model	Description	DPDT Model	Description
482AA36	Push to Open	390.00	484AA36 Push to Open
			415.00

SPECIFY FINISH

Add to List

V 628 Aluminum (standard), blue infill		X 613 Dark Bronze, white infill	N/C
--	--	---------------------------------	-----



400 SERIES WIRELESS TRANSMITTER AND RECEIVER



Distributor Discount Code **CK** List

For Remote Control Versatility for Touch Panel Column and Push Plate Switches

433MHz Micro Transmitter

- Requires a non-metallic surface box or standard bollard cap (non-metallic). Works with 400RC433
- Pre-Wired for quick installation
- Antenna magnifies signal

- **Voltage Input:** 9V Battery (included)
- **Trigger Input:** Momentary, N.O.Dry Contact
- **Temperature:** -20F — 100F
- **Dimensions:** 1-9/64" x 15/16" x 7/32" (29 x 49 x 6mm)


NEW



Model	Description	
400W1-433	433MHz Micro Transmitter	72.00

433MHz 1 Channel Nano Receiver

- Designed to control automatic closing and anti-burglar systems. Works with 400W1-433.
- **Carrier Frequency:** 433.92 MHz
- **Relay Numbers:** 1
- **Temperature:** -4F — 158F
- **Power Supply:** 12/24 VAC/DC
- **Contacts:** C-NO
- **Dimensions:** 1-1/4" x 2" x 3/4" Deep (32 x 51 x 19mm)



Model	Description	
400RC433	433MHz 1 Channel Receiver	85.00

Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com



20 - Exit Switches

BOLLARD POST

Distributor Discount Code **CK**



- For use with Push Plates, Touch Panel Columns & Exit Switches
- 6" square with 1/8" walls
- Black HDPE mortised removable cap with secure transmitter mount
- Standard single gang prep located at 36" from finished floor
- Surface mount (42") or In-Ground mount (54")



SPECIFY MODEL List

Model	Description	
BPS6	42" surface mount, 6" square post	390.00
BPG6	54" in-ground, 6" square post	390.00

SPECIFY PREP Add to List

S	1-gang prep	N/C
D	2-gang prep	N/C
P	Touch Panel prep	N/C
A	Narrow Mullion Prep	N/C

SPECIFY FINISH Add to List

V 628 Aluminum (standard)	X 710 Dark Anodized Aluminum	N/C
---------------------------	------------------------------	-----



SECURITY DOOR CONTROLS
 801 Avenida Acaso • Camarillo, CA 93012
 Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective October 1, 2012



EMERGENCY DOOR RELEASE

Distributor Discount Code **V** **List**

SDC 490 series emergency door release stations include 2-SPDT contacts for release of all doors on the same circuit and remote annunciation. A built-in local alarm is standard.




492




491

491	Blue break glass station, emergency door release, 2-SPDT 10 Amp contacts with built-in local alarm (12/24V), 2 replacement glass included. Single gang box mounted	184.00
491-GL4	Four replacement glass plates for 491	20.00
491-BB	Blue surface mount box for 491	60.00
492	Blue pull station, emergency door release, 2-SPDT 10 Amp contacts with built-in local alarm (12/24V), 2 replacement glass rods included. Single gang box mounted.	150.00
492-GL4	Four replacement glass rods for 492	20.00
492-BB	Blue surface mount box for 492	40.00




EMERGENCY ACCESS PANEL

Distributor Discount Code **CK** **List**



APB1000A	Emergency access panel for lobby door system. Mushroom button with key reset and siren	350.00
-----------------	--	---------------



SIRENS AND BUZZERS

Distributor Discount Code **CK** **List**



400-SN



400-RMB

Standard Finish 630 Stainless Steel

400U-RMB	Buzzer on 1 gang plate. Specify 12/24VDC, 20mA max	45.00
400NU-RMB	Buzzer on narrow plate. Specify 12/24VDC, 20mA max	45.00
400U-SN	Siren on 1 gang plate, 3 - 28VDC, 18mA max	55.00
400NU-SN	Siren on narrow plate, 3 - 28VDC, 18mA max	55.00



COMMUNICATING BATHROOM CONTROLS

Distributor Discount Code **CK** **List**



CB401-A
CB402-A



CB401-B
CB402-B

EmLock®, Selectric®, Electra™ or HiTower®

CB401-AU	Communicating bath switch, 630 Stainless Steel finish.	80.00
CB401-B	Emergency access switch, red. 2 Required	80.00
CB701	Emergency key switch, red	150.00

Electrified Lockset Application

CB402-A	Communicating bath switch, U 630 Stainless Steel finish.	80.00
CB402-B	Emergency access switch, red. 2 Required	80.00
CB702	Emergency key switch, red	150.00

Reference page 13 for system operation and component requirements



DESK SWITCH IN COMPACT BOX

Distributor Discount Code **DK** **List**



15-2



15-2-3

15-1	AA, SPDT push switch, 6 Amp @ 30VAC/DC	110.00
15-2	MO, SPDT push switch, 10 Amp @ 30VAC/DC	75.00
15-3	AA, SPDT toggle switch, 6 Amp @ 30VAC/DC	130.00
15-2-3	(1) MO push switch and (1) AA (on/off) toggle SPDT, 6 Amp @ 30VAC/DC	185.00



TIME DELAY RELAY

Distributor Discount Code **CK** **List**



Time Delay Relays

10TD	Time delay relay module with adjustable 1-60 second relock delay. Input: 12/24V AC/DC Voltage: 2 Amps @ 30 VDC (<i>resistive</i>)	Output: SPDT, dry contact Size: 2-1/4"x 1-1/2" x 3/4"	85.00
-------------	---	--	--------------



TIMERS

Distributor Discount Code **CK** **List**



14-2	7 day programmable timer with memory battery back-up capability Output: 1 SPDT, dry contact Voltage: 16 Amps @ 30 VAC/DC Specify 12V AC/DC or 24 AC/DC	240.00
-------------	---	---------------



PASSIVE INFRARED EGRESS CONTROL

Distributor Discount Code **V** **List**



MD-31DOW	Motion detector with time delay, white	235.00
MD-31DB	Motion detector with time delay, black	235.00



WALL MOUNT INDICATOR

Distributor Discount Code **CK** **List**



400U-L2 400NU-L2

Standard Finish 630 Stainless Steel

400U-L2	Two LEDs. Specify lens color. Standard Finish, on 1 gang plate	45.00
400NU-L2	Two LEDs. Specify lens color. Standard Finish, on narrow plate	45.00
400U-L3	Three LEDs. Specify lens color. Standard Finish	55.00
400U-LT1	One tricolor LED. Red, Green and Amber. Standard Finish	45.00
400U-LT2	Two tricolor LED. Red, Green and Amber. Standard Finish	55.00



DOOR POSITION SENSORS

Distributor Discount Code **V** **List**



DPS-11
DPS-11-2

MC-4




MC-4M

DPS-11	Adjustable ball type SPDT 5 Amp	45.00
DPS-11-2	Adjustable ball type 2 SPDT 5 Amp	65.00
MC-4	Recessed magnetic (3/4", SPDT, 30VDC, 50mA)	30.00
MC-4M	Recessed magnetic mounted on 1-1/4" x 4-7/8" plate	85.00
MC-7	Biased high security recessed magnetic (1", SPDT, 30VDC, 50mA)	65.00



LATCH AND DEADBOLT MONITORING STRIKE KITS

Distributor Discount Code **DK** **List**

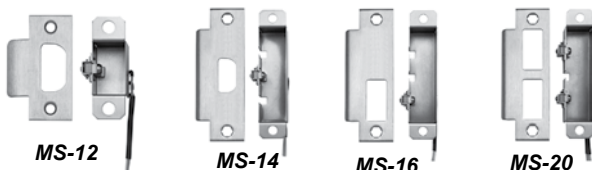

MS-12

MS-14

MS-16

MS-20

see page 18.69 for ordering information



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012



SECURITY DOOR CONTROLS

801 Avenida Acaso • Camarillo, CA 93012

Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012



Features

- 5' Ft Cable
- UL10B Listed for 3 Hour Fire Rated Doors.
- 800,000 cycles. 8 times UL test criteria
- Wire Replacement Warranty

Power Transfer Hinge Application

Installed in the center hinge position of the door, PTH Power Transfer Hinges provide the concealed wires required to transfer power from the frame to electric hardware in the door for control and monitoring capability.



PTH x 5 Ft Cable

PTH-4Q	Four (4) Conductor Power Transfer Hinge 1 Amp @ 12/24V per pair 4.5" x 4.5" standard weight, 626 Dull Chrome	150.00
PTH-4Q-DPS	Four (4) Conductor Power Transfer Hinge with Door Status Contact 1 Amp @ 12/24V per pair Door Status Contact: 250 mA @ 30VDC 4.5" x 4.5" standard weight, 626 Dull Chrome	200.00
PTH-10Q	Ten (10) Conductor Power Transfer Hinge 1 Amp @ 12/24V per pair 4.5" x 4.5" standard weight, 626 Dull Chrome	195.00
PTH-10Q-DPS	Ten (10) Conductor Power Transfer Hinge with Door Status Contact 1 Amp @ 12/24V per pair Door Status Contact: 250 mA @ 30VDC 4.5" x 4.5" standard weight, 626 Dull Chrome	250.00
FOR VON DUPRIN ELECTRIC LATCH RETRACTION EXIT DEVICES AND OTHER HIGH INRUSH DEVICES The PTH-2+4 hinges have been tested with Von Duprin* EL devices and Von Duprin power booster at Underwriters Laboratories.		
PTH-2+4Q	16 Amp Inrush , 6 conductor power transfer hinge 1-pair 16 Amp inrush, 4 Amp continuous; 2-pair 1 Amp @ 12/24V 4.5" x 4.5" standard weight, 626 Dull Chrome	175.00
PTH-2+4QDPS	16 Amp Inrush , 6 conductor power transfer hinge, with door status contact 1-pair 16 Amp inrush, 4 Amp continuous; 2-pair 1 Amp @ 12/24V Concealed Door Position Contact, 250 mA @ 30VDC 4.5" x 4.5" standard weight, 626 Dull Chrome	225.00

Special Order Sizes and Heavy Weight Hinges

POA

SPECIFY FINISH

Dull Chrome finish is standard as specified by suffix Q.
To specify special finish, designate finish suffix below in lieu of Q.

C 605 Bright brass	H 613 Oil rubbed bronze	P 625 Bright Chrome	N/C
---------------------------	--------------------------------	----------------------------	------------



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012



PTM HEAVY DUTY SERIES ELECTRIC POWER TRANSFER DEVICE

Distributor Discount Code **LZK** **LIST**



Miscellaneous Fire
 Door Accessories
 UL 10C 3 Hr Fire Rated
 Classified per UBC 7-2



PTM-2AL	Two (2) Conductor Power Transfer Device: Two (2) 18 Ga. wires 5 Amp @ 12/24V AC/DV Aluminum Powder Coat, US28 equivalent	358.00
PTM-2BZ	Two (2) Conductor Power Transfer Device: Two (2) 18 Ga. wires 5 Amp @ 12/24V AC/DV Dark Brown Powder Coat, US10B equivalent	358.00
PTM-10AL	Ten (10) Conductor Power Transfer Device: Ten (10) 24 Ga. wire 1 Amp @ 12/24V AC/DC Aluminum Powder Coat, US28 equivalent	358.00
PTM-10BZ	Ten (10) Conductor Power Transfer Device: Ten (10) 24 Ga. wire 1 Amp @ 12/24V AC/DC Dark Brown Powder Coat, US10B equivalent	358.00



CONCEALED POWER TRANSFER DEVICE



LIST



Miscellaneous Fire
 Door Accessory



PT-5	UL Listed Concealed Power Transfer Device, for use with all high and low current applications Also recommended for use with Von Duprin* EL 33 and 99 series and other high inrush devices *Von Duprin is a registered trademark of Ingersol Rand and Von Duprin. Not intended as endorsement.	60.00
-------------	---	--------------



POWER TRANSFER LOOPS

Distributor Discount Code **V** **LIST**



PT-2U



PT-3V

PT-2U	Armored flex conduit, less wires, 18" long, 1/4"	20.00
PT-3V	Armored flex conduit, less wires, with wire junction box	45.00



MINI CONSOLES

Distributor Discount Code **WK** LIST

Mini Consoles provide control for one or two doors. Momentary or maintained push button switches with Bi-Color LED indicators.

Dimensions: 4-1/8" W x 3-1/8" H x 6-1/4" L
Contacts: 5 Amp @ 30VDC

Color: Beige
Power: 24VDC @ 0.02 Amp required for each LED



DTMO-1	One momentary switch and one LED	200.00
DTMO-2	Two momentary switches and two LEDs	250.00
DTMOMA-2	One momentary, one maintained switch and two LEDs	300.00
DTMA-2	Two maintained switches and two LEDs	250.00



MODULAR CONTROL CONSOLES

Distributor Discount Code **WK** LIST



TCC AL8 AL4E



RCC AL8 AL4E

TCC	Slope front desk top console 12 stations maximum when using 2 control panels. Base unit, less panel. Color: black sides and beige top Dimensions: 10-1/4"W x 4-3/4"H x 9-5/8"D	300.00
RCC	Rack mount console. 24 stations maximum when using three control panels. (Maximum is 20 stations with "E" panel) Base unit, less panels. Color: Beige Dimensions: 19"W x 5-1/4"H x 6"D	650.00

Chassis less switches and light panels.

SPECIFY SWITCH AND INDICATOR PANELS

Add to List

Rocker Switch Rating: 3 Amp @ 30VDC **Power Required per LED:** 24VDC @ 0.02 Amp

AL4	Four momentary switches with LEDs	500.00
BL4	Four maintained switches with LEDs	500.00
CL4	Four momentary/off/maintained switches with LEDs	500.00
DL4	Four momentary/off/momentary switches with LEDs	500.00
AL8	Eight momentary switches with LEDs	850.00
BL8	Eight maintained switches with LEDs	850.00
CL8	Eight momentary/off/maintained switches with LEDs	850.00
DL8	Eight momentary/off/momentary switches with LEDs	850.00
AL4E	Four momentary switches with LEDs, alarm, reset push button and key lock	600.00
BL4E	Four maintained switches with LEDs, alarm reset push button and key lock	600.00
CL4E	Four momentary/off/maintained switches with LEDs, alarm, reset push button and key lock	600.00
DL4E	Four momentary/off/momentary switches with LEDs, alarm, reset push button and key lock	600.00
EA	Panel with alarm, reset push button and key lock	120.00
F	Blank panel	28.00

CABINETS

Add to List

CAB7	Black cabinet for one RCC 7"H x 20-1/2"W x 14-1/2"D	575.00
CAB12	Black cabinet for two RCC 12-1/2"H x 20-1/2"W x 14-1/2"D	775.00



SECURITY DOOR CONTROLS
 801 Avenida Acaso • Camarillo, CA 93012
 Email: Service@sdgsecurity.com • www.sdgsecurity.com

Price List Effective October 1, 2012



SECURITY DOOR CONTROLS

801 Avenida Acaso • Camarillo, CA 93012

Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012

COMMUNICATING BATHROOM EMLOCKS®

APPLICATION

Single hospital bathroom shared by two patient rooms.

SYSTEM OPERATION

Both doors must be closed to lock.

Activating CB401A (B) locks both doors.


Activating CB401A (B) again unlocks both doors.

When doors are locked, activating either CB401B (C) emergency release will unlock both doors.

Both doors will unlock automatically via signal from fire panel.

SYSTEM COMPONENTS

- (A) Fail Safe locks with door position switch.
Example: 1511-DPS
- (B) CB401A System activation push switch.
- (C) CB401B Emergency release push switch to be mounted above each door. CB701B key switch optional.
- (D) 631RFxUR1 Power Supply with Fire Panel Tie-In.

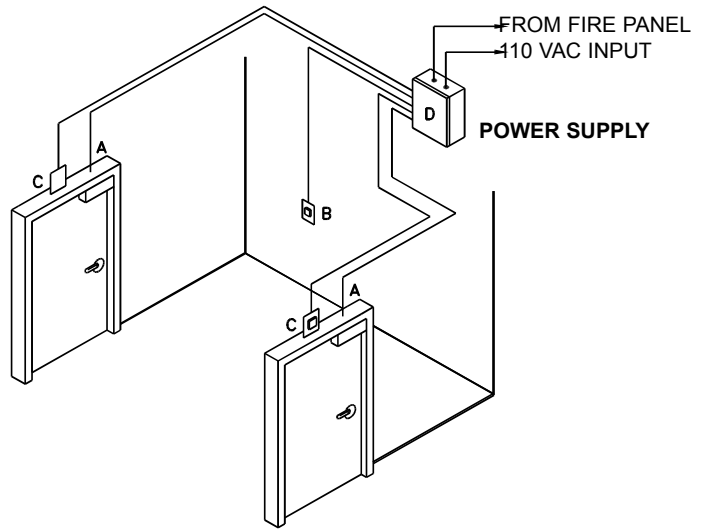

COMMUNICATING BATHROOM WITH HiTOWER® LOCKS

APPLICATION

Single hospital bathroom shared by two patient rooms.

SYSTEM OPERATION

Both doors must be closed to lock.

Activating CB402A (B) locks both doors.

When doors are locked, turning either inside door lever unlocks both doors.

When doors are locked, activating either CB402B (C) emergency release will unlock both doors.

Both doors will unlock automatically via signal from fire panel.

SYSTEM COMPONENTS



- (A) Fail Safe locks with door position switch or REX.
Examples: 7550-L, or 7850-RD
- (B) CB402A System activation push switch.
- (C) CB402B Emergency release push switch to be mounted above each door. CB702B key switch optional.
- (D) 631RFxUR1 Power Supply with Fire Panel Tie-In.



CB401-A
CB402-A



CB401-B
CB402-B

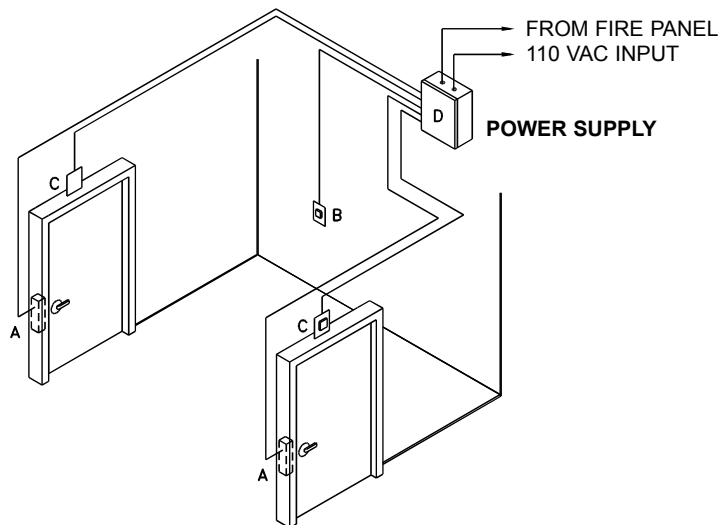

UR1



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012

2 DOOR INTERLOCK "A"

3 and 4 Door Interlock Available

APPLICATIONS

Darkrooms, laboratories, clean rooms, x-ray or other treatment rooms, light and air trap rooms and more.

OPERATION

All doors remain closed and unlocked. Opening either door causes the second door to lock until the opened door returns to the closed position. A key switch is provided for system activation and deactivation.

SYSTEM COMPONENTS SHOWN



- (A) 631RFA-UR2-4 Power Supply
- (B) 1511-DPS EmLock
- (C) 701 System On-Off Key Switch

ALTERNATE "B" COMPONENTS

Refer to literature for lock specifications.

EmLocks	Electric Strikes	HiTower	Bolt Locks
1581-DPS	★ 55-A-LBM	7530-L	FS23M-D
1565-DPS	★ 55-B-LBM	7830-DS	1190A-D
1511-DPS-TJ	★ 55-C-LBM	★ 7560-L	1091A-D

★ Indicates Fail Secure

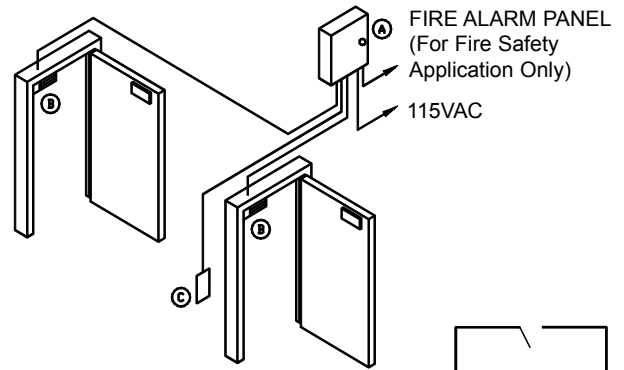

NOTES: Consult factory for 3 and 4 door interlocks. Operation and configurations shown may be altered for specific job application needs. Consult factory for more information. Component changes may require system design/schematic changes. Consult factory.

2 DOOR MANTRAP "B"

3 and 4 Door Mantrap Available

APPLICATIONS

Laboratories, clean rooms, money counting rooms, restricted dark rooms, computer rooms and more.

OPERATION

Both doors are normally closed and locked. Unlocking either door causes the other to be incapable of being unlocked. A key switch (D) is provided for system activation and deactivation. Doors are accessed by Digital Keypad (C).

SYSTEM COMPONENTS SHOWN



- (A) 631RFA-UR2-4
- (B) 1511-DPS-BAS or 1511-BAS
- (C) 918 Digital Entry Momentary Access
- (D) 701 Key Switch ON-OFF

ALTERNATE "B" COMPONENTS/LOCKING DEVICE

Refer to literature for lock specifications.

EmLocks	Electric Strikes	HiTower	Bolt Locks
1565-DPS-BA	★ 55-A-LCM-LBM	7530-S	FS23M-BD
1511-DPS-BAS-TJI	★ 55-B-LCM-LBM	★ 7560-S	1190A-BD
		7830-DS	

★ Indicates Fail Secure

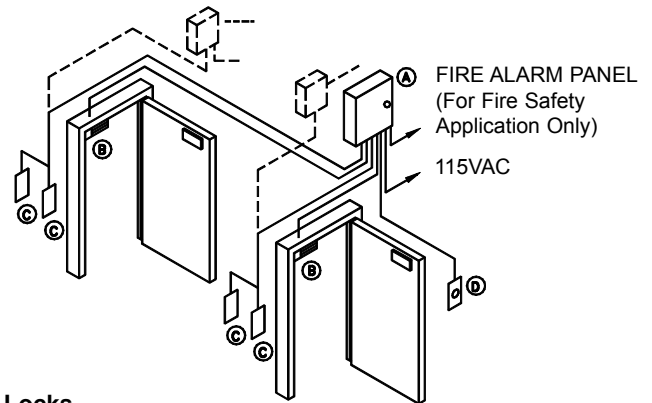

ALTERNATE "C" COMPONENTS/ACCESS CONTROL - Refer to literature for switch specifications.

Key Switch	Desk Switch	Keypad	Card & Keypad Reader
702	15-2	918	E4KP
702N		920	E5P
802			
802N			

ALTERNATE "D" COMPONENTS/ON-OFF SWITCH - Refer to literature for switch specifications.

Desk Switch	Push Switch
15-1 ON-OFF	425 ON-OFF

NOTES: Consult factory for 3 and 4 door mantraps. Operation and configurations shown may be altered for specific job application needs. Consult factory for more information. Component changes may require system design/schematic changes. Consult factory. Consult factory for Control and Monitoring Panel applications.

APPLICATIONS

Laboratories, clean rooms, money counting rooms, restricted dark rooms, computer rooms and more.

OPERATION

Door 1 is locked, Door 2 remains unlocked. When Door 1 is unlocked, Door 2 locks. When Door 2 is opened, Door 1 cannot be unlocked. A key switch (D) is provided for system activation and deactivation. Door 1 is accessed by Digital Keypad.

SYSTEM COMPONENTS SHOWN

- (A) 631RFA-UR2-4 Power Supply
- (B) 1511-DPS-BAS EmLock
- (C) 918 Digital Entry Momentary Access
- (D) 701 Key Switch ON-OFF

ALTERNATE "B" COMPONENTS/LOCKING DEVICE

Refer to literature for lock specifications.

EmLocks	Electric Strikes	HiTower	Bolt Locks
1565-DPS-BA	◆ 55-A-LCM-LBM	7530-S	FS23M-BD
1511-DPS-BAS-TJI	◆ 55-B-LCM-LBM	7830-DS	1190A-BD
		◆ 7560-S	

◆ Indicates Fail Secure



ALTERNATE "C" COMPONENTS/ACCESS CONTROL - Refer to literature for switch specifications.

Key Switch	Desk Switch	Keypad	Card & Keypad Reader
702	15-2	918	E4KP
702N		920	E5P
802			
802N			

ALTERNATE "D" COMPONENTS/ON-OFF SWITCH - Refer to literature for switch specifications.

Desk Switch	Push Switch
15-1 ON-OFF	425 ON-OFF

NOTES: Consult factory for 3 and 4 door interlocks. Operation and configurations shown may be altered for specific job application needs. Consult factory for more information. Component changes may require system design/schematic changes. Consult factory. Consult factory for Control and Monitoring Panel applications.

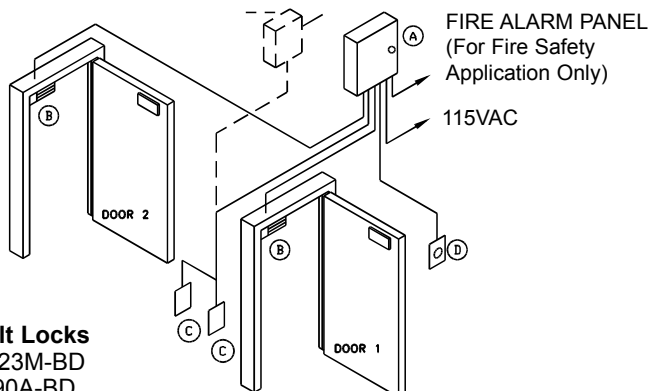

SDC
SECURITY DOOR CONTROLS
 801 Avenida Acaso • Camarillo, CA 93012
 Email: Service@sdcsecurity.com • www.sdcsecurity.com

ELEVATOR LOBBY DOOR SYSTEM


OPERATION

Many high-rise building tenants that occupy a complete floor may have a problem when it comes to securing their elevator lobby doors. These doors lead through office space to the emergency exit stairwell doors. People must have free access to the stairwell at all times. This leaves some companies vulnerable to transient traffic, theft and loss of proprietary information. SDC manufactures a lobby door security system which meets both fire life safety and security needs.

The elevator lobby doors are normally closed and locked by SDC Model Z7850 HiTower Fail-Safe lockset. The intercom system provides two-way communication to the security desk. When a call is placed from the elevator lobby, the security desk personnel can momentarily release the SDCZ7850 lockset by using the SDC Desk Console (Model DTMO-1). If there is no response from the security desk personnel, the person in the elevator lobby can depress the red exit palm push button switch (SDC Model 432KUR). When the red exit switch is activated, the SDC Model Z7850 HiTower lock will immediately release and an alarm will sound in the elevator lobby and the security desk console.

An authorized person can reset the HiTower lockset, turn off the alarm and return the system to the normal secured operation by using the built-in Key Reset on the red exit palm bush button switch. Personnel may always obtain access to the offices by use of an access control system. Egress from the office to the lobby is accomplished by rotating the inside lever.

A SDC Series 600 Power Supply will provide 24VDC power to the HiTower locks, Security Desk Console and alarm. The emergency control relay within the power supply will turn off the system power when activated by a building fire alarm device. The SDC Model Z7850 lockset will release immediately when power is removed.

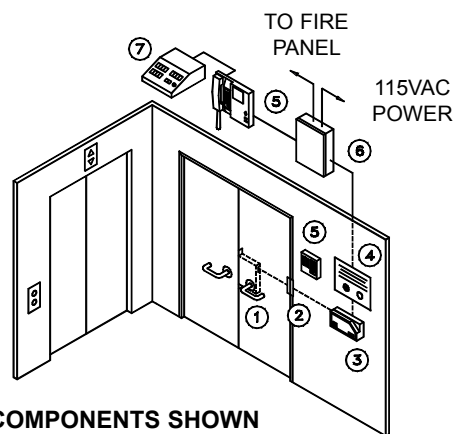

SYSTEM COMPONENTS SHOWN

- (1) SDC-Z 7850 HiTower Lock
- (2) SDC-PTH-4 Power Transfer Hinge
- (3) E4KP Stand Alone Proximity Reader
- (4) SDC-APB 1000 Sign with Release Push Switch and Alarm
- (5) Intercom/CCTV by others
- (6) SDC-631RF Power Supply
- (7) SDC-DT, RCC or TCC Door Control Console and Annunciator

NOTE: All system field wiring is to be installed in accordance with all local building codes and the approval of the local authority having jurisdiction. All wiring is to be done by a licensed Access Control or Fire and Life Safety specialist.

Price List Effective October 1, 2012

Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page
Angle Brackets	12.51	PB-8	16.64	1511-DF	12.49	433	20.73
ACM-1	16.64	PD2090A	11.43	1511S	14.55	434	20.73
AL4	22.82	PSB560	17.68	1511T	14.55	435	20.73
AL8	22.82	PT-2U	21.81	1512	12.47	441	20.73
APB1000A	20.77	PT-3V	21.81	1513	12.47	442	20.73
AR11Y	12.50	PT-5	21.81	15-2	20.77	443	20.73
BL4	22.82	PTH	21.80	15-3	20.77	444	20.73
BL8	22.82	PTM	21.81	15-4 F/S	9.36	446	20.73
BPS6S	20.76	RB12V4	16.64	1561	13.52	451	20.73
BPG6S	20.76	RB12V7	16.64	1561S	13.53	452	20.73
BR64	16.65	RCC	22.82	1561TJ	13.53	453P	20.73
CB401-AU	20.77	S6303FH	8.35	1562	13.52	45-4	9.37
CB401-B	20.77	SC-10	8.35	1562SC	13.53	45-6	9.37
CB701	20.77	TB2450	16.65	1562SCHDB	13.53	45-7	9.37
CC1-5	6.18	TB2475	16.65	1565	13.52	45A	9.37
CC3-5	6.18	TCC	22.82	1566	13.52	463	20.73
CL4	22.82	TJ1	12.48	1571	12.47	474	20.73
CL8	22.82	TJ2	12.48	1571DE	14.57	491	20.77
CR4	16.64	TJ2440	16.65	1572	12.47	492	20.77
CYL	6.18	TJ81	12.48	1573	12.47	55 A thru F	9.38
DBM	9.38	TJ82	12.48	1575DEU	14.57	55-ABC	9.39
DC-1	12.50	TP1220	16.65	1575U	11.44	510-590	18.69
DL4	22.82	TP2440	16.65	1576AB	11.44	6005B	4.15
DL8	22.82	TR-12	16.65	1576-BK	11.44	602RF	16.63
DPS-11	20.78	TR-24	16.65	1576DEU	14.57	621P	16.62
DTMA	22.82	UB11	12.50	1576-MP	11.44	631RF	16.63
DTMO	22.82	UB12	12.50	1576U	11.44	632RF	16.63
E1200	12.46	UF11	12.50	1576-ZB	11.44	634RF	16.63
E300	11.42	UF12	12.50	1581	12.47	636RF	16.63
E4KP	3.14	UF81	12.50	1581DE	14.57	7000-DGK	6.23
E5	4.15	UF82	12.50	1581-DF	14.57	701	19.70
E600	12.46	UR-1	16.64	1581S	14.56	702	19.70
E6200	12.46	UR2-4	16.64	1582	12.47	702R	14.58
E72K-A	3.14	UR4-8	16.64	1583V	11.42	704	19.70
EH	15.60	Z7250	5.17	1591U	11.43	705	19.70
EKE03	8.32	Z7550	6.21	180A	10.41	706	19.70
EMC	8.30	ZA7850	6.18	2090A	10.40	707	19.70
EZ-A	12.49	ZD7250	5.16	210	10.40	708	19.70
EZ-B	12.49	ZR7550	6.21	2490A	10.40	708R	14.58
EZ-D	12.49	ZS7250	5.16	25-4U	9.36	709	19.70
EZ-T	12.49	ZT7550	6.21	260	10.40	710	19.70
FB-4	16.64	ZT7850	6.18	280	10.41	711	19.70
Filler Plates	12.51	ZY7550	6.21	290	11.42	712	19.70
FS23M	10.40	101-1A	14.58	290LS	11.42	713	19.70
GKE03	8.32	101-1AK	14.58	295	11.42	7500EB	6.21
GL160A	11.43	101-4AM	14.58	30-4	9.39	801AL	19.70
GL260A	11.43	101-DE	14.57	350V	12.45	802AL	19.70
LR100	7.24	101-KDE	14.57	352V	12.45	804AL	19.70
M7200	2.6	101-PAM	14.58	400U-L2	20.78	805AL	19.70
M7800	2.7	1091A	10.40	400U-RMB	20.77	806AL	19.70
MC-4	20.78	10TD	20.78	400U-SN	20.77	807AL	19.70
MC-7	20.78	110	10.40	412	20.72	808AL	19.70
MD-31	20.72	1190A	10.40	413	20.72	809AL	19.70
MS-12	18.69	1291A	10.40	422	20.72	810AL	19.70
MS-14	18.69	12VR	16.63	423	20.72	811AL	19.70
MS-16	18.69	14-2	20.78	424	20.72	812AL	19.70
MS-18	18.69	1490A	10.40	425	20.72	813AL	19.70
MS-20	18.69	15-1	20.77	431	20.73	918	3.11
MSB550	17.68	1511	12.47	432	20.73	920	3.12
PB-16	16.64	1511DE	14.57			930	3.14
						931	3.14

Price List 17

ELECTRIC & MECHANICAL ACCESS CONTROL HARDWARE

INNOVATION

SDC has been awarded scores of patents for:

- Electrified Cylindrical Locksets
- Electrified Mortise Locksets
- Actuator Controlled Locksets
- Electromagnetic Locks
- Magnetic Shear Locks
- Delayed Egress Locks
- Request-to-Exit Bars

LEADERSHIP

SDC has earned twelve SIA New Product Achievement and Security Industry Finest Awards since 1997. In addition, SDC has received numerous SIA New Product Showcase certificates of recognition for Commitment to Innovation and Excellence in New Product Development.



PROJECTS

- NASA Kennedy Space Center, FL
- King Khalid International Airport, Saudi Arabia
- J. Paul Getty Museum, Los Angeles
- Chek Lap Kok Airport, Hong Kong
- Bank of America, U.S.A.
- Kuala Lumpur International Airport, Malaysia
- Smithsonian Institute, Washington D.C.
- California State Capital, East End Project
- Duke Energy Nuclear Plants, N. & S. Carolina
- Dallas/Forth Worth International Airport, Texas
- Museum of Modern Art, New York
- Exxon, U.S.A.
- Chase Manhattan Bank, U.S.A
- JFK International Airport; NY

QUALITY

SDC practices quality management based on continued improvement of daily operations, product quality and customer satisfaction.



Please check on-line version of price list regularly. We strive to expand our product line and offering you more options and updates on regular basis.

COMPREHENSIVE CD-ROM CATALOG

The SDC Comprehensive CD-ROM catalog includes all product datasheets, installation instructions and list prices. Go to the SDC website or send us an e-mail to request your Comprehensive CD-ROM Catalog today.




shipQUICK

Over 100 SDC products are available for shipment the same day or next business day from the SDC warehouse nearest you. Visit us at www.SDCsecurity.com and download your copy of the shipQUICK inventory so you know first hand which products SDC can expedite for you.



SDC SYSTEM LIBRARY

SDC has provided a library of the more commonly used systems. These and more basic systems are available for all visitors. Product specific system designs are compatible with the Project Folders. A system riser diagram and point-to-point drawing, including written method of operation, and all documentation related to all components may be automatically downloaded to your Project Folder.

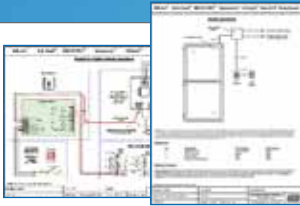

Download complimentary Pre-Built systems at SDCsecurity.com/diagrams



Available on the **App Store**
It's on **ANDROID**

SDC APP Free! Available for iPad, iPhone & Android
SDCSecurity.com/FreeApp



www.sdcsecurity.com service@sdsecurity.com
Tel: (805) 494 0622 (800) 413 8783
Fax: (805) 494 8680 (800) 959 4732

801 Avenida Acaso, Camarillo, CA 93012
P.O. Box 3670, Camarillo, CA 93011-3670

© Copyright 2012, Security Door Controls